

Supplies and Accessories

for Chromatography



Fused Silica Capillary Tubing
PressFit Connector and Splitter
GC Liners, Ferrules and Septa
Vials and Accessories
Filtration
PEEK and Polymeric Tubing

Stainless Steel Tubing
GC Fittings and Unions
HPLC Fittings and Unions
HPLC Safety Products
Syringes for GC and LC
Flash Cartridges and Bulk Material

Contact us

Online

To find 24/7 product information and prices, promotions, news, search tools, catalogs, brochures and much more, visit www.bgb-shop.com.

For general information, technical support, customer service and to place an order:

Switzerland

BGB Analytik AG
Rohrmattstrasse 4
CH-4461 Boeckten
Phone +41 (0)61 991 00 46
Fax +41 (0)61 991 00 25
Email sales@bgb-analytik.com



Germany and EU

BGB Analytik Vertrieb GmbH
Mühlestraße 1
D-79539 Lörrach-Tumringen
Phone +49 (0) 7621 58 842 70
Fax +49 (0) 7621 58 842 89
Email sales.de@bgb-analytik.com

Belgium, Netherlands, Luxembourg

BGB Analytik Benelux B.V.
Drielandendreef 42-44
3845 CA Harderwijk / The Netherlands
Phone +31 (0)341 700 270
Fax +31 (0)341 700 271
Email sales.benelux@bgb-analytik.com

France

BGB Analytik France S.A.S.
81, Vie de l'Etraz
F-01630 Saint Jean de Gonville
Phone 04 50 48 85 67
Fax 04 50 56 23 78
Email sales.fr@bgb-analytik.com

Turkey

BGB Analytik Laboratuvar Malzemeleri Ticaret LTD.ŞTİ
Starport Residence, Yenişehir Mah. Osmanlı Bulvarı
Sümbül Sok. No:10, Daire: 193
34912 Kurtköy, Pendik, İstanbul
Phone +90 (216) 909 20 48
Email sales.tr@bgb-analytik.com

USA

BGB Analytik USA LLC
8407 F Richmond Hwy
Alexandria, VA 22309, USA
Phone +1-703-780-1500
Fax +1-703-991-9131
Email sales.usa@bgb-analytik.com



BGB Downloads
www.bgb-shop.com/downloads

Location and Facility

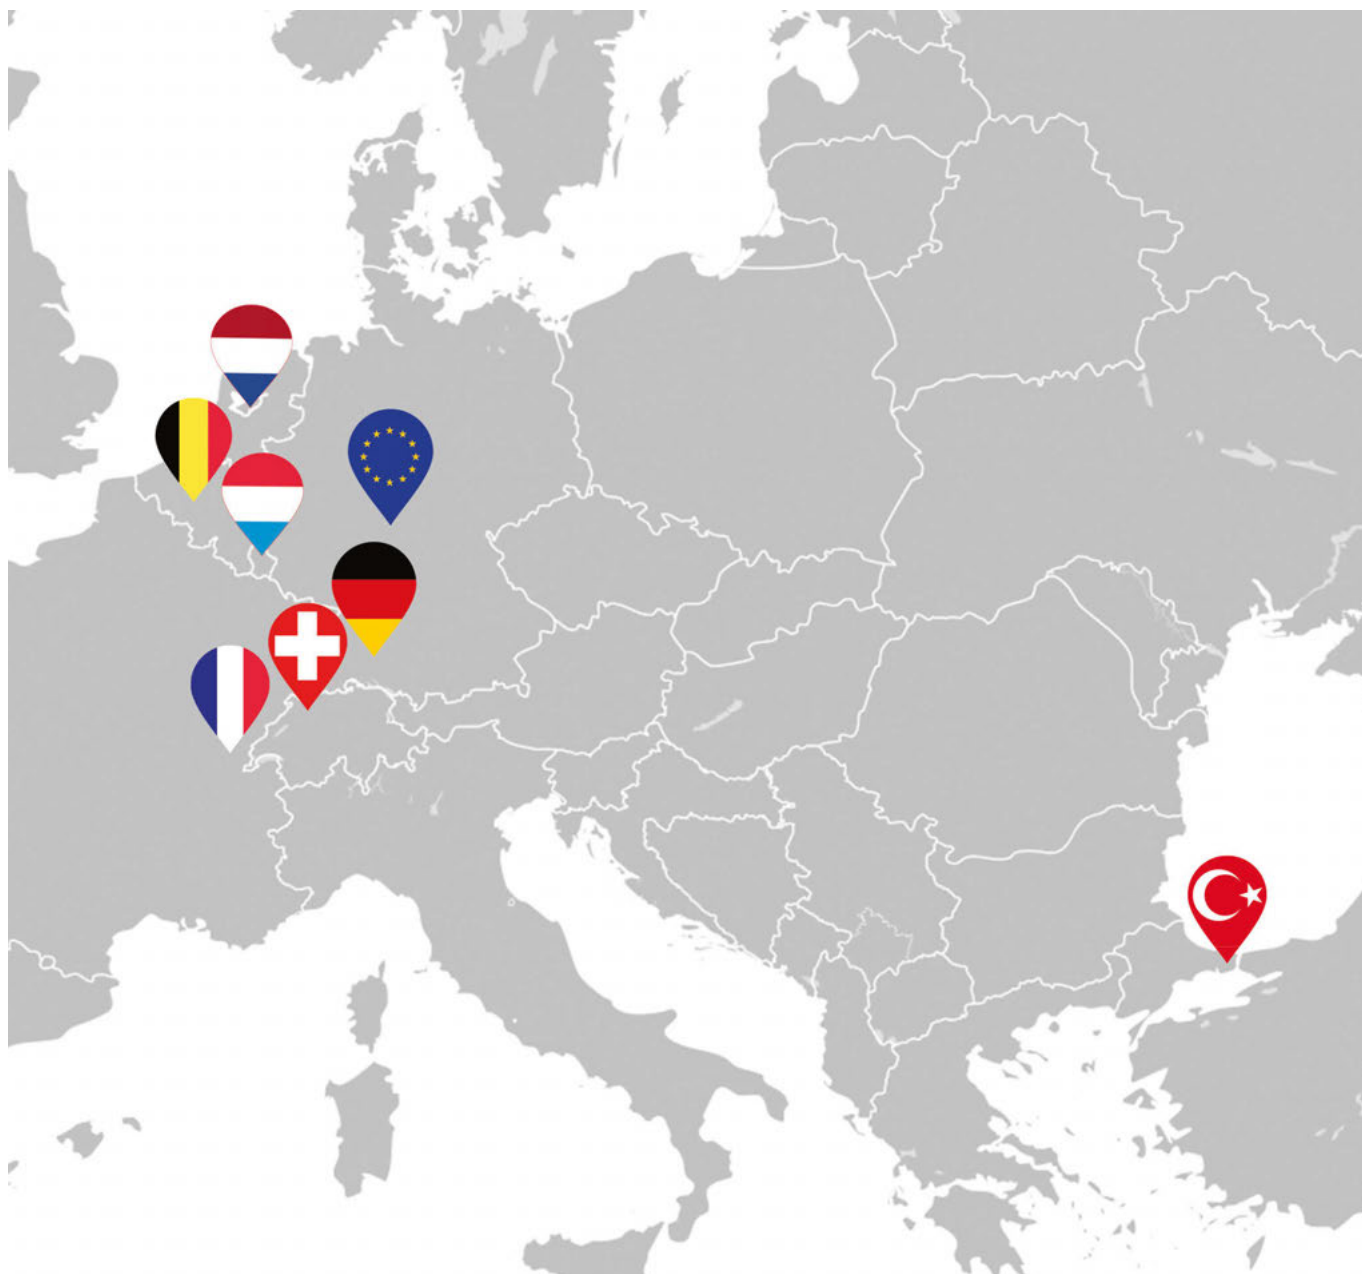


Table of Contents

Fused Silica Capillary Tubing	6–9
PressFit Connector and Splitter	10–13
GC Liners.....	14–19
GC Ferrules.....	20–23
Septa for GC Injectors.....	24
BGB Electronic Leak Detector	25
Vials and Accessories	26–51
- Vials and Caps	
- Crimping Tools	
- Vial Racks and Storage Boxes	
BGB Filter Vials.....	52–53
Filtration	54–60
- Syringe Filters	
- Plastic Disposable Syringes	
- Spin Filters	
- Well Filter Plates	
PEEK Tubing	61–63
Polymeric Tubing	64
Stainless Steel Tubing.....	65–66
Copper Tubing.....	66
Swagelok® Fittings and Unions.....	67–69
HPLC Adapters, Fittings and Unions	70–75
Static Mixers for UHPLC and HPLC	76
HPLC Safety Products.....	77–88
- Safety-Caps	
- Waste-Caps	
- Safety-Waste-Filters and Adapters	
- Fittings and Plugs for Safety- & Waste-Caps	
- Air Inlet Valve and Safety-Filters for Safety-Caps	
Syringes for GC and LC	89–95
Purification	96–117
- Flash Cartridges	
- Bulk Material	
- HPLC Columns	
- Empty Flash Column Hardware	
Trademarks of Other Manufacturers	118
Acronyms	118
Part Number Index.....	119–127

Fused Silica Capillary Tubing of Polymicro

Polymicro Technologies offers 100 % synthetic fused silica tubing for a huge number of applications in GC, LC, CE and MS. Available are three coatings.



TSP Standard Polyimide Coating

- Operating temperature up to 350°C
- Mirror-smooth interior surfaces for stable flow of liquids and gases
- Low metal ion content provides an inert inner surface
- Offers excellent abrasion resistance during handling and usage
- Interfaces easily with existing fitting technologies

Part No.	ID (µm)	OD (µm)	Coating (µm)	Minimum Order (m)
TSP-002150	002 ± 1	150 ± 6	12	5
TSP-005150	005 ± 2	150 ± 6	12	5
TSP-005375	005 ± 2	363 ± 10	20	5
TSP-010150	010 ± 2	150 ± 6	12	5
TSP-010375	010 ± 2	363 ± 10	20	5
TSP-015150	015 ± 2	150 ± 6	12	5
TSP-015375	015 ± 2	363 ± 10	20	5
TSP-020090	020 ± 2	090 ± 6	12	5
TSP-020150	020 ± 2	150 ± 6	12	5
TSP-020375	020 ± 2	363 ± 10	20	5
TSP-025150	025 ± 2	150 ± 6	12	5
TSP-025375	025 ± 2	363 ± 10	20	5
TSP-030150	030 ± 2	150 ± 6	12	5
TSP-030375	030 ± 2	363 ± 10	20	5
TSP-040105	040 ± 3	105 ± 6	12	5
TSP-040150	040 ± 3	150 ± 6	12	5
TSP-040375	040 ± 3	363 ± 10	20	5
TSP-050150	050 ± 3	150 ± 6	12	5
TSP-050192	050 ± 3	186 ± 6	16	5
TSP-050375	050 ± 3	363 ± 10	20	5
TSP-075150	075 ± 3	150 ± 6	12	5
TSP-075200	075 ± 3	193 ± 7	12	5
TSP-075375	075 ± 3	363 ± 10	20	5
TSP-100170	100 ± 4	164 ± 6	12	5
TSP-100200	100 ± 4	193 ± 7	12	5
TSP-100245	100 ± 4	238 ± 7	16	5
TSP-100375	100 ± 4	363 ± 10	20	5
TSP-150375	150 ± 4	363 ± 10	20	5
TSP-180350	180 ± 6	360 ± 10	18	25
TSP-200350	200 ± 6	360 ± 10	18	25
TSP-250350	250 ± 6	360 ± 10	18	25
TSP-320450	320 ± 6	435 ± 10	18	25
TSP-530660	536 ± 6	665 ± 15	24	25
TSP-530700	530 ± 10	700 ± 20	24	25
TSP-700850	700 ± 10	850 ± 20	24	5

Quantity breaks available

TSP Standard Polyimide Coating with very small ID's (sub-1 µm)

Part No.	ID (nm)	OD (µm)	Coating (µm)	Length (m)
TSP000.2375NC	200 ± 100	363 ± 10	20	5
TSP000.6375NC	600 ± 100	363 ± 10	20	5
TSP001.0375NC	1000 ± 100	363 ± 10	20	5



Tubing Sleeves
see page 70

TSP Standard Polyimide Coating with Thick Wall

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSP-150665	150 ± 6	665 ± 15	24	10
TSP-200665	200 ± 6	665 ± 15	24	10
TSP-250665	250 ± 6	665 ± 15	24	10
TSP-300665	300 ± 6	665 ± 15	24	10
TSP-450670	450 ± 6	673 ± 15	24	10

TSP Standard Polyimide Coating with 1/32 " OD

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSP-050794	50 ± 3	794 ± 12	24	10
TSP-075794	75 ± 3	794 ± 12	24	10
TSP-100794	100 ± 4	794 ± 12	24	10
TSP-200794	200 ± 6	794 ± 12	24	10
TSP-250794	250 ± 6	794 ± 12	24	10
TSP-300794	300 ± 6	794 ± 12	24	10
TSP-400794	400 ± 6	794 ± 12	24	10
TSP-500794	500 ± 6	794 ± 12	24	10

WWP Square Tubing with TSP Coating for CE

- Operating temperature up to 350°C

Part No.	ID (μm)	OD (μm)	Glass OD ¹⁾	Minimum Order (m)
WWP-050375	050 ± 5	363 ± 15	300	10
WWP-075375	075 ± 5	363 ± 15	300	10
WWP-100375	100 ± 5	363 ± 15	300	10



- Coating (Polyimide)
- Fused Silica
- Square ID

TSH UV-Transparent Coating

- Operating temperature up to 125°C

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSH-050375	050 ± 3	363 ± 10	20	10
TSH-075375	075 ± 3	363 ± 10	20	10
TSH-100375	100 ± 3	363 ± 10	20	10

TSU UV Transparent Coating for CE

- Operating temperature up to 160°C

Part No.	ID (μm)	OD (μm)	Coating (μm)	Minimum Order (m)
TSU-050375	050 ± 3	363 ± 10	15	10
TSU-075375	075 ± 3	363 ± 10	15	10
TSU-100375	100 ± 4	363 ± 10	15	10

Quantity breaks available

¹⁾ Measured flat-to-flat

Cleaving Stone



BGB Cleaving Stone is made from hard ceramic, for cutting Fused Silica Capillary Tubing.

Part No.	Description	Qty.
CS	Cleaving Stone	pk.10



PressFit Connector and Splitter
see page 10

Deactivated FS-Capillary Tubing



BGB offers three different types of Deactivated Tubing for many applications in gas chromatography, liquide chromatography, mass spectrometry and capillary electrophoresis. Best inertness shows the standard phenyl/methyl deactivation. This is the best choice for the most common solvents. For solvents with traces of water the OV-1701-OH deactivation should be used. This deactivation is more stable against water or water containing solvents, but is less inert than a phenyl/methyl or methyl deactivation.

Each tubing is tested with a Grob-Test for best inertness. In contrast to other manufacturers we do check the complete batch and not only some meters of the batch.



Phenyl/Methyl Deactivated FS-Tubing

- Operating temperature up to 350°C

Part No.	ID (µm)	OD (µm)	Length (m)
TSP-025375-D-10	025 ± 2	363 ± 10	10
TSP-050375-D-10	050 ± 3	363 ± 10	10
TSP-075375-D-10	075 ± 3	363 ± 10	10
TSP-100170-D-10	100 ± 4	164 ± 6	10
TSP-100200-D-10	100 ± 4	193 ± 7	10
TSP-100245-D-10	100 ± 4	238 ± 7	10
TSP-100375-D-10	100 ± 4	363 ± 10	10
TSP-150375-D-10	150 ± 4	363 ± 10	10
TSP-180350-D-10	180 ± 6	360 ± 10	10
TSP-200350-D-10	200 ± 6	360 ± 10	10
TSP-250350-D-10	250 ± 6	360 ± 10	10
TSP-320450-D-10	320 ± 6	435 ± 10	10
TSP-530660-D-10	536 ± 6	665 ± 15	10
TSP-530700-D-10	530 ± 10	700 ± 20	10

OV-1701-OH Deactivated FS-Tubing (water-resistant)

- Operating temperature up to 350°C

Part No.	ID (µm)	OD (µm)	Length (m)
TSP-025375-P-10	025 ± 2	363 ± 10	10
TSP-050375-P-10	050 ± 3	363 ± 10	10
TSP-075375-P-10	075 ± 3	363 ± 10	10
TSP-100375-P-10	100 ± 4	363 ± 10	10
TSP-250350-P-10	250 ± 6	360 ± 10	10
TSP-320450-P-10	320 ± 6	435 ± 10	10
TSP-530660-P-10	536 ± 6	665 ± 15	10
TSP-530700-P-10	530 ± 10	700 ± 20	10

Other dimensions available on request.

Cleaving Stone



BGB Cleaving Stone is made from hard ceramic, for cutting Fused Silica Capillary Tubing.

Part No.	Description	Qty.
CS	Cleaving Stone	pk.10

Methyl Deactivated FS-Tubing

- Operating temperature up to 350°C



Part No.	ID (µm)	OD (µm)	Length (m)
TSP-025375-M-10	025 ± 2	363 ± 10	10
TSP-050375-M-10	050 ± 3	363 ± 10	10
TSP-075375-M-10	075 ± 3	363 ± 10	10
TSP-100170-M-10	100 ± 4	164 ± 6	10
TSP-100200-M-10	100 ± 4	193 ± 7	10
TSP-100245-M-10	100 ± 4	238 ± 7	10
TSP-100375-M-10	100 ± 4	363 ± 10	10
TSP-150375-M-10	150 ± 4	363 ± 10	10
TSP-180350-M-10	180 ± 6	360 ± 10	10
TSP-200350-M-10	200 ± 6	360 ± 10	10
TSP-250350-M-10	250 ± 6	360 ± 10	10
TSP-320450-M-10	320 ± 6	435 ± 10	10
TSP-530660-M-10	536 ± 6	665 ± 15	10
TSP-530700-M-10	530 ± 10	700 ± 20	10

LVI-Gap for Large Volume Injection

The LVI-Gap is a phenyl/methyl deactivated FS Tubing of 15m x 0.53mm ID, with a thin film of a silicone on the last 3m. This tubing is optimized for large volume injections in gas chromatography. The compounds in the solvent will be trapped in the phase and separated from the solvent. After evaporating the solvent, the compounds can be transferred to the analytical column.

Part No.	Coating	Dimensions	OD (µm)
26060427	0.25µm BGB-5	15 m x 0.53 mm	700 ±20
26060425	0.45µm BGB-5	15 m x 0.53 mm	700 ±20



PressFit Connector and
Splitter

see page 10

BGB PressFit Connector and Splitter



PressFit-Connectors and -Splitters are made out of borosilicate glass to connect two or more capillary columns together. The seal of this connection type is the coating on the outside of the capillary tubing. This polyimide is soft and adhesive. Many applications in gas chromatography and mass spectrometry are possible.

- Couple a capillary column with a pre-column
- Couple capillary columns of different polarities
- Couple capillary columns for increasing length
- Repair a broken capillary column
- Split before and/or after the capillary column
- Switch between different capillary columns (multidimensional gas chromatography)



How it works

PressFit connectors form a leak-tight seal by using concentric compressive forces as the tubing end is pushed into a tightly controlled radial restriction. These forces are strong enough to form a leak-tight seal under the normal pressures used in capillary GC. The seal is further strengthened as an exterior polyimide resin coating on the column bonds to the inner surface of the connector after several thermal cycles at 200°C.

To obtain a good connection it is necessary to clean the end's of the tubing's with some solvent. Remove 1 cm of the tubing by making a cut with a ceramic scoring wafer into the polyimide surface and bend the tubing until it breaks. Examine the end with a pocket magnifier for a proper cut. A poorly cutted capillary column will produce an inadequate seal. Repeat this step if necessary. If the cut is smooth, the tubing can be pushed into the PressFit.

Our PressFit's are made out of borosilicate glass. For most of the applications a deactivated surface is not necessary, because of the short contact of the sample with the surface (<20ms). Nevertheless we recommend for critical compounds the use of deactivated PressFit's.

MS-Fit Connector and Splitter

The MS-Fit Connector and Splitter are the next generation of our PressFit products. The taper inside and the length are improved for a better sealing, also with the modern coatings used to make fused silica tubing. These hard coatings are very often the cause of leaks, which are typical seen in mass spectrometry.

PressFit Color Code*



Internal Diameter FS-Tubing	External Diameter FS-Tubing	Color
0.20 mm	0.29 - 0.36 mm	purple ●
0.25 mm	0.34 - 0.38 mm	red ●
0.32 mm	0.41 - 0.48 mm	black ●
0.53 mm	0.61 - 0.70 mm	blue ●

* The standard PressFit connector is optimized for a defined outer capillary diameter. Outer diameters of columns of different origin vary to some extent.

Defined PressFit Connector – Deactivated



Part No.	ID _A (mm)	ID _B (mm)	Qty.
2020LD	0.20	0.20	pk.25
2025LD	0.20	0.25	pk.25
2032LD	0.20	0.32	pk.25
2053LD	0.20	0.53	pk.25
2525LD	0.25	0.25	pk.25
2532LD	0.25	0.32	pk.25
2553LD	0.25	0.53	pk.25
3232LD	0.32	0.32	pk.25
3253LD	0.32	0.53	pk.25
5353LD	0.53	0.53	pk.25

Universal PressFit Connector – Deactivated



Part No.	External Diameter	Qty.
UNIAD	0.30 to 0.75 mm OD	pk.10
UNIBD	0.20 to 0.75 mm OD	pk.10

MS-Fit Connector and Splitter – Deactivated



Part No.	Type	External Diameter	Qty.
MS-FIT	Connector	0.30 to 0.50 mm	pk.10
MS-FIT3	3-way Splitter	0.30 to 0.50 mm	ea.
MS-FIT4-T	4-way T-Splitter	0.30 to 0.50 mm	ea.
MS-FIT4-X	4-way X-Splitter	0.30 to 0.50 mm	ea.



GC Liners
see page 14

Defined PressFit 3-way Splitter – Deactivated



Part No.	ID _A (mm) Inlet	ID _B (mm) Outlet 1	ID _C (mm) Outlet 2	Qty.
S202020D	0.20	0.20	0.20	ea.
S252525D	0.25	0.25	0.25	ea.
S323232D	0.32	0.32	0.32	ea.
S535353D	0.53	0.53	0.53	ea.


Other combinations:

S-AA-BB-CC-D	AA	BB	CC	ea.
--------------	----	----	----	-----

Universal PressFit 3-way Splitter – Deactivated

Part No.	External Diameter	Qty.
SUNI3AD	0.30 to 0.75 mm OD	ea.
SUNI3BD	0.20 to 0.75 mm OD	ea.

Defined PressFit 4-way Y-Splitter – Deactivated




Part No.	ID _A (mm) Inlet	ID _B (mm) Outlet 1	ID _C (mm) Outlet 2	ID _D (mm) Outlet 3	Qty.
S20202020TD	0.20	0.20	0.20	0.20	ea.
S25252525TD	0.25	0.25	0.25	0.25	ea.
S32323232TD	0.32	0.32	0.32	0.32	ea.
S53535353TD	0.53	0.53	0.53	0.53	ea.

Other combinations:

S-AA-BB-CC-DD-TD	AA	BB	CC	DD	ea.
------------------	----	----	----	----	-----

Universal PressFit 4-way Y-Splitter – Deactivated

Part No.	External Diameter	Qty.
SUNI4TAD	0.30 to 0.75 mm OD	ea.
SUNI4TBD	0.20 to 0.75 mm OD	ea.

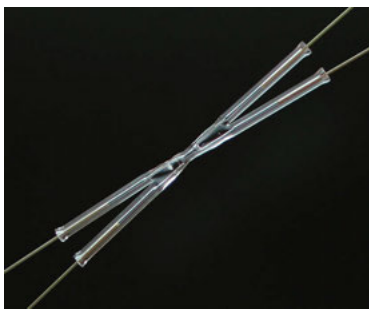

Part No.	ID _A (mm) Inlet	ID _B (mm) Inlet 2	ID _C (mm) Outlet 1	ID _D (mm) Outlet 2	Qty.
S20202020XD	0.20	0.20	0.20	0.20	ea.
S25252525XD	0.25	0.25	0.25	0.25	ea.
S32323232XD	0.32	0.32	0.32	0.32	ea.
S53535353XD	0.53	0.53	0.53	0.53	ea.

Other combinations:

S-AA-BB-CC-DD-XD	AA	BB	CC	DD	ea.
------------------	----	----	----	----	-----

Defined PressFit 4-way X-Splitter – Deactivated

Part No.	External Diameter	Qty.
SUNI4XAD	0.30 to 0.75 mm OD	ea.
SUNI4XBD	0.20 to 0.75 mm OD	ea.

Custom made Connectors or Splitters are available on request.

Hexagon Key Set, 30 pieces (mm & inch)




Metric: 0.7; 0.9; 1.27; 1.5; 2.0; 2.5; 4.0; 4.5; 5.0; 5.5;
6.0; 7.0; 8.0; 10.0 mm

Inch: 0.028; 0.036; 0.05; 1/16; 5/64; 3/32; 7/64; 1/8;
9/64; 5/32; 3/16; 7/32; 1/4; 5/16 and 3/8 inch

Material: Chrome-Vanadium Steel

Part No.	Description	Qty.
IMBUS	Hexagon Key Set (mm & inch), Chrome Vanadium Steel	ea.

Fused Silica Tubing
see page 6

GC Liners

Deactivated Splitless Liners for Agilent Instruments

Description Benefits/Uses Similar to Agilent #				
	Splitless Liner 2.0mm ID, 6.5 x 78.5 mm trace samples <2 µl 5181-8818, 5183-4703, 5183-4704		Splitless Liner, 4.0mm ID, 6.5 x 78.5 mm trace samples >2 µl 210-3003, 210-3003-5	
Part No.	LS1104	LS1104-5	LS1105	LS1105-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Agilent #				
	Splitless Liner with Wool, 4.0mm ID, 6.5 x 78.5 mm trace samples >2 µl -		Single Gooseneck Splitless Liner, 2.0mm ID, 6.5 x 78.5 mm trace samples <2 µl -	
Part No.	LS1106	LS1106-5	LS1103	LS1103-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Agilent #				
	Single Gooseneck Splitless Liner, 4.0mm ID, 6.5 x 78.5 mm trace samples >2 µl 5181-3316, 5183-4695, 5183-4696, 5190-2270		Single Gooseneck Splitless Liner w. Wool, 4.0mm ID, 6.5 x 78.5 mm trace samples >2 µl 5062-3587, 5183-4693, 5183-4694, 5190-2271	
Part No.	LS1100	LS1100-5	LS1101	LS1101-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Agilent #				
	Double Gooseneck Splitless Liner, 4.0mm ID, 6.5 x 78.5 mm active, trace samples >2 µl 5181-3315, 5183-4705, 5183-4706, 5190-2272		Double Gooseneck Cyclo Splitless Liner, 2.0mm ID, 6.5 x 78.5 mm active, dirty, trace samples <2 µl -	
Part No.	LS1102	LS1102-5	LS1107	LS1107-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Agilent #				
	Double Gooseneck Cyclo Splitless Liner, 4.0mm ID, 6.5 x 78.5 mm active, dirty, trace samples >2 µl -			
Part No.	LS1108	LS1108-5		
Qty.	ea.	pk.5		

Deactivated PTV Liners for Agilent Instruments

Description Benefits/Uses Similar to Agilent #				
	PTV Liner, straight Glass, 2.0 mm ID, 3.0 x 71 mm general use 5183-2036		PTV Liner, baffled Glass, 1.5 mm ID, 3.0 x 71 mm active compounds, drugs, pesticides 5183-2037	
Part No.	LS1200	LS1200-5	LS1201	LS1201-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Agilent #				
	PTV Liner, with Wool, 2.0 mm ID, 3.0 x 71 mm large volume injections 5183-2038			
Part No.	LS1202	LS1202-5		
Qty.	ea.	pk.5		

Deactivated Split Liners for Agilent Instruments

	<--- column end this side			<--- column end this side	
Description Benefits/Uses Similar to Agilent #					
	Split Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm universal 19251-60540, 5183-4691, 5183-4692		Cup Splitter Liner, 4.0 mm ID, 6.3 x 78.5 mm high & low MW compounds 18740-80190, 5183-4699, 5183-4700		
	Part No. Qty.	LS1000 ea.	LS1000-5 pk.5	LS1001 ea.	LS1001-5 pk.5
Description Benefits/Uses Similar to Agilent #					
	Cyclosplitter Liner, 4.0 mm ID, 6.3 x 78.5 mm dirty samples -		Split Precision Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm dirty samples, trace samples 210-4004-5		
	Part No. Qty.	LS1002 ea.	LS1002-5 pk.5	LS1003 ea.	LS1003-5 pk.5
Description Benefits/Uses Similar to Agilent #					
	Single Gooseneck Precision Split Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm dirty samples, trace samples 210-4022-5		Low Pressure Drop Single Gooseneck Precision Split Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm universal -		
	Part No. Qty.	LS1004 ea.	LS1004-5 pk.5	LS1005 ea.	LS1005-5 pk.5
Description Benefits/Uses Similar to Agilent #					
	Low Pressure Drop Split Liner with Wool, 4.0 mm ID, 6.3 x 78.5 mm universal 5183-4647, 5183-4701, 5183-4702, 5183-4711, 5183-4712, 5183-4713		SPME Split Liner, 0.75 mm ID, 6.3 x 78.5 mm ideal for low-volume, SPME applications -		
	Part No. Qty.	LS1006 ea.	LS1006-5 pk.5	LS1007 ea.	LS1007-5 pk.5

Inlet Seals, Capillary Column Nuts and MSD Source Nuts for Agilent Instruments

Description Similar to Agilent #				
	Gold-plated Inlet Seal (incl. Washer), 0.8 mm hole 18740-20885, 5188-5367		Stainless Steel Inlet Seal (incl. Washer), 0.8 mm hole 18740-20880	
Part No.	LS9000	LS9000-5	LS9001	LS9001-5
Qty.	ea.	pk.5	ea.	pk.5
Description Similar to Agilent #				
	Capillary Column Nut, Stainless Steel, for use with "Compact" Ferrules 5181-8830		Capillary Column Nut, Stainless Steel, for use with Standard 1/16" Ferrules 05921-21170	
Part No.	LS9002	LS9002-5	LS9003	LS9003-5
Qty.	ea.	pk.5	ea.	pk.5
Description Similar to Agilent #				
	MSD Source Nut, Brass 05988-20066			
Part No.	LS9004	LS9004-5		
Qty.	ea.	pk.5		

Deactivated Liners for Bruker/Varian 1177 S/SL Injector

Description Benefits/Uses Similar to Bruker/Varian #				
	Split Liner with Frit, 4.0mm ID, 6.3 x 78.5mm universal -		Split Liner with Wool, 4.0mm ID, 6.3 x 78.5mm universal 392611934	
Part No.	LS3000	LS3000-5	LS3001	LS3001-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Split Precision Liner with Wool, 4.0mm ID, 6.3 x 78.5mm dirty samples, trace samples -		Single Gooseneck Splitless Liner, 4.0mm ID, 6.5 x 78.5mm trace samples <2 µl 392611927	
Part No.	LS3002	LS3002-5	LS3003	LS3003-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Single Gooseneck Splitless Liner with Wool, 4.0mm ID, 6.5 x 78.5mm trace samples <2 µl 392611928		Double Gooseneck Splitless Liner, 4.0mm ID, 6.5 x 78.5mm active, trace samples <2 µl 392611929	
Part No.	LS3004	LS3004-5	LS3005	LS3005-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Low Pressure Drop Precision Liner with Wool, 2.0mm ID, 6.3 x 78.5mm dirty samples, trace samples <2 µl -		Splitless Liner with Wool, 2.0mm ID, 6.5 x 78.5mm trace samples <2 µl 392599903	
Part No.	LS3006	LS3006-5	LS3007	LS3007-5
Qty.	ea.	pk.5	ea.	pk.5

Deactivated Liners for Bruker/Varian SPI S/SL Injector

Description Benefits/Uses Similar to Bruker/Varian #				
	Liner 0.53mm, 4.6 x 54mm high linearity for 0.25 & 0.32mm ID columns 190010906		Liner 0.8mm, 4.6 x 54mm high linearity for 0.53mm ID columns 190010907	
Part No.	LS3200	LS3200-5	LS3201	LS3201-5
Qty.	ea.	pk.5	ea.	pk.5

Capillary Nuts for Bruker/Varian Instruments

Description Similar to Bruker/Varian #				
	Capillary Nuts, Brass 03-949551-00, 394955100		Capillary Nuts, Stainless Steel 03-949551-00, 394955100	
Part No.	LS9006	LS9006-5	LS9007	LS9007-5
Qty.	ea.	pk.5	ea.	pk.5

Deactivated Liners for Bruker/Varian 1078/1079 Injectors

Description Benefits/Uses Similar to Bruker/Varian #				
	Split Liner with Frit, 3.4 mm ID, 5.0 x 54 mm dirty samples, non-active compounds 392611946		Splitless Liner, 2 mm ID, 5.0 x 54 mm trace samples <2 µl 392611947	
Part No.	LS3100	LS3100-5	LS3101	LS3101-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Open Liner, 0.5 mm ID, 5.0 x 54 mm trace samples <1 µl 392611949		Open Liner, 0.75 mm ID, 5.0 x 54 mm trace, low volume samples 392611948	
Part No.	LS3102	LS3102-5	LS3103	LS3103-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Bruker/Varian #				
	Split Liner, without Frit, 3.4 mm ID, 5.0 x 54 mm active samples 392611945		Split Precision Liner with Wool, 3.4 mm ID, 5.0 x 54 mm dirty samples, trace samples -	
Part No.	LS3104	LS3104-5	LS3105	LS3105-5
Qty.	ea.	pk.5	ea.	pk.5

BGB Electronic Leak Detector

Don't let a small leak turn into a costly repair – protect your analytical column by using a BGB Electronic Leak Detector.



For Details
see page 25

Part No.	Description	Qty.
33333-A	BGB Electronic Leak Detector	ea.



Autosampler & Manual Syringes
see page 89




Deactivated Split and Splitless Liners for Bruker/Varian 1075/1077 S/SL Injectors

		<--- column end this side		<--- column end this side
Description Benefits/Uses Similar to Bruker/Varian #	Split Liner, 1 mm ID, 6.3 x 72 mm purge & trap inlet, splitting or samples <1 µl -		Split Liner with Wool, 4 mm ID, 6.3 x 72 mm universal 190010901	
Part No. Qty.	LS3400 ea.	LS3400-5 pk.5	LS3401 ea.	LS3401-5 pk.5
				
Description Benefits/Uses Similar to Bruker/Varian #	Cup Splitter, 4 mm ID, 6.3 x 72 mm high & low molecular weight compounds -		Cyclo Splitter, 4 mm ID, 6.3 x 72 mm dirty samples -	
Part No. Qty.	LS3402 ea.	LS3402-5 pk.5	LS3403 ea.	LS3403-5 pk.5
				
Description Benefits/Uses Similar to Bruker/Varian #	Split Liner with Frit, 4 mm ID, 6.3 x 72 mm dirty samples, non-active compounds 190010903		Split Precision Liner with Wool, 4 mm ID, 6.3 x 72 mm active samples, dirty samples -	
Part No. Qty.	LS3404 ea.	LS3404-5 pk.5	LS3405 ea.	LS3405-5 pk.5
				
Description Benefits/Uses Similar to Bruker/Varian #	Splitless Liner, 2 mm ID, 6.3 x 74 mm trace samples <2 µl 190010905		Splitless Liner, 4 mm ID, 6.3 x 74 mm trace samples >2 µl -	
Part No. Qty.	LS3300 ea.	LS3300-5 pk.5	LS3301 ea.	LS3301-5 pk.5
				
Description Benefits/Uses Similar to Bruker/Varian #	SPME Liner, 0.75 mm ID, 6.3 x 74 mm ideal for low-volume SPME applications -		Double Gooseneck Splitless Liner, 4 mm ID, 6.3 x 74 mm active samples, trace samples up to 4 µl -	
Part No. Qty.	LS3302 ea.	LS3302-5 pk.5	LS3303 ea.	LS3303-5 pk.5
				
Description Benefits/Uses Similar to Bruker/Varian #	Double Gooseneck Cyclo Splitless Liner, 4 mm ID, 6.3 x 74 mm active samples, dirty samples, trace samples up to 4 µl -			
Part No. Qty.	LS3304 ea.	LS3304-5 pk.5		

Capillary Nuts for Bruker/Varian Instruments

Description Similar to Bruker/Varian #				
	Capillary Nuts, Brass 03-949551-00, 394955100		Capillary Nuts, Stainless Steel 03-949551-00, 394955100	
	Part No. Qty.	LS9006 ea.	LS9006-5 pk.5	LS9007 ea.

Deactivated Split and Splitless Liners for Thermo Scientific Instruments

Description Benefits/Uses Similar to Thermo Scientific #				
	Split Liner, 1.0 mm ID, 8.0 x 105 mm purge, trap & fast GC 45320075		Split Liner, 3.0 mm ID, 8.0 x 105 mm universal 45320031	
Part No.	LS2000	LS2000-5	LS2001	LS2001-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Split Liner, 5.0 mm ID, 8.0 x 105 mm universal 45320030		Split Precision Liner with Wool, 5.0 mm ID, 8.0 x 105 mm dirty samples, trace samples -	
Part No.	LS2002	LS2002-5	LS2003	LS2003-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Splitless Liner, 2.0 mm ID, 8.0 x 105 mm trace samples -		Splitless Liner, 3.0 mm ID, 8.0 x 105 mm trace samples 45320032	
Part No.	LS2103	LS2103-5	LS2100	LS2100-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Splitless Liner, 5.0 mm ID, 8.0 x 105 mm trace samples 45320033		Splitless Precision Liner with Wool, 5.0 mm ID, 8.0 x 105 mm dirty samples, trace samples -	
Part No.	LS2101	LS2101-5	LS2102	LS2102-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Split Liner, 1.0 mm ID, 2.75 x 120 mm trace samples, high recovery & linearity 45322054		Split Liner, 2.0 mm ID, 2.75 x 120 mm universal 45322045	
Part No.	LS2200	LS2200-5	LS2201	LS2201-5
Qty.	ea.	pk.5	ea.	pk.5
Description Benefits/Uses Similar to Thermo Scientific #				
	Baffle Liner, 2.0 mm ID, 2.75 x 120 mm trace samples -			
Part No.	LS2202	LS2202-5		
Qty.	ea.	pk.5		

Inlet Sealing Ring, Fixing Nut and Cup Ferrules for Thermo Scientific Instruments

Description Similar to Thermo Scientific #						
	Inlet Liner Ring for SSL Injector 29033406		Inlet Liner Ring for PTV Injector 29013417		Column Fixing Nut 35032423	
Part No.	29033406	29013417	LS9005	LS9005-5		
Qty.	pk.2	pk.2	ea.	pk.5		

	Part No.	Description	Similar to Thermo Scientific #	Qty.
	29013488	0.38 mm ID Cup Ferrule for Thermo M4 nut	29053488	pk.10
	29013487	0.48 mm ID Cup Ferrule for Thermo M4 nut	29053487	pk.10
	29013486	0.8 mm ID Cup Ferrule for Thermo M4 nut	29053486	pk.10

GC Ferrules

Graphite Ferrules

- Upper temperature limit 450°C
- High-purity graphite – preferred for capillary GC use
- Ideal for glass-to-metal connections – doesn't stick to glass
- Precision formed – flash-free ID
- Reusable if not overtightened
- One-piece design requires no back ferrule

Standard 1/16"



Part No.	Description	Qty.
G1604	1/16" x 0.4 mm ID	pk.10
G1625	1/16" x 0.5 mm ID, 2-hole	pk.10
G1605	1/16" x 0.5 mm ID	pk.10
G1608	1/16" x 0.8 mm ID	pk.10
G1610	1/16" x 1.0 mm ID	pk.10
G1612	1/16" x 1.2 mm ID	pk.10
G1616	1/16" x 1/16" ID	pk.10
G1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
G1804	1/8" x 0.4 mm ID	pk.10
G1805	1/8" x 0.5 mm ID	pk.10
G1808	1/8" x 0.8 mm ID	pk.10
G1816	1/8" x 1/16" ID	pk.10
G1818	1/8" x 1/8" ID	pk.10
G1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
G1405	1/4" x 0.5 mm ID	pk.10
G1408	1/4" x 0.8 mm ID	pk.10
G1416	1/4" x 1/16" ID	pk.10
G1414	1/4" x 1/4" ID	pk.10
G1418	1/4" x 1/8" ID	pk.10
G1440	1/4" x 4.0 mm ID	pk.10
G1460	1/4" x 6.0 mm ID	pk.10
G1400	1/4", no-hole	pk.10

Standard 3/8", 1/2" and 3/4"



Part No.	Description	Qty.
G3838	3/8" x 3/8" ID	pk.10
G1212	1/2" x 1/2" ID	pk.5
G3434	3/4" x 3/4" ID	pk.5

Short Ferrules for Agilent



Part No.	Description	Qty.
G1604-HP	Short Ferrule, 1/16" x 0.4 mm ID	pk.10
G1605-HP	Short Ferrule, 1/16" x 0.5 mm ID	pk.10
G1608-HP	Short Ferrule, 1/16" x 0.8 mm ID	pk.10
G1610-HP	Short Ferrule, 1/16" x 1.0 mm ID	pk.10

Ferrules for Thermo / Carlo Erba



Part No.	Description	Qty.
G1805-CE	0.5 mm ID for M8-Nut (CE-Taper)	pk.10
G1808-CE	0.8 mm ID for M8-Nut (CE-Taper)	pk.10

Ferrules for Shimadzu



Part No.	Description	Qty.
GSH50	5 mm ID	pk.10
GSH04	0.4 mm ID for Shimadzu 17A, 2010 & 2014	pk.10
GSH05	0.5 mm ID for Shimadzu 17A, 2010 & 2014	pk.10
GSH08	0.8 mm ID for Shimadzu 17A, 2010 & 2014	pk.10

Cup Ferrules for Thermo / Carlo Erba



Part No.	Description	Qty.
29013489	0.28 mm ID Cup Ferrule M4 nut	pk.10
29013488	0.38 mm ID Cup Ferrule M4 nut	pk.10
29013487	0.48 mm ID Cup Ferrule M4 nut	pk.10
29013486	0.80 mm ID Cup Ferrule M4 nut	pk.10

Liner Seals and O-Rings

- Graphite and Fluoroelastomer Liner Seals

For Agilent Instruments



Part No.	Description	Qty.
GS635-HP	Graphite Liner Seal, 6.35 mm ID	pk.10
GS652-HP	Graphite Liner Seal, 6.52 mm ID	pk.10

For Perkin Elmer Instruments



Part No.	Description	Qty.
GSPE01	Graphite O-Ring	pk.10

For Varian 1078/1079



Part No.	Description	Qty.
GSBV01	Graphite Liner Ferrule	pk.10

For Shimadzu Instruments



Part No.	Description	Qty.
GSSH01	Graphite Liner Seal	pk.10



GSSH02	Graphite O-Ring, Split	pk.10
GSSH03	Graphite O-Ring, Splitless	pk.10

For Thermo Scientific Instruments



Part No.	Description	Qty.
29013417	Inlet Liner Ring for PTV Injector	pk.2



29033406	Inlet Liner Ring for SSL Injector	pk.2
-----------------	-----------------------------------	------

Graphite/Vespel® Ferrules

- Upper temperature limit 400°C
- 40 % Graphite/60 % Vespel
- Made from quality DuPont Vespel/graphite blend
- Recommended for GC/MS interface applications
- One-piece design requires no back ferrule

Standard 1/16"



Part No.	Description	Qty.
GV1603	1/16" x 0.3 mm ID	pk.10
GV1624	1/16" x 0.4 mm ID, 2-hole	pk.10
GV1604	1/16" x 0.4 mm ID	pk.10
GV1625	1/16" x 0.5 mm ID, 2-hole	pk.10
GV1605	1/16" x 0.5 mm ID	pk.10
GV1608	1/16" x 0.8 mm ID	pk.10
GV1610	1/16" x 1.0 mm ID	pk.10
GV1616	1/16" x 1/16" ID	pk.10
GV1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
GV1804	1/8" x 0.4 mm ID	pk.10
GV1825	1/8" x 0.5 mm ID, 2-hole	pk.10
GV1805	1/8" x 0.5 mm ID	pk.10
GV1828	1/8" x 0.8 mm ID, 2-hole	pk.10
GV1808	1/8" x 0.8 mm ID	pk.10
GV1816	1/8" x 1/16" ID	pk.10
GV1818	1/8" x 1/8" ID	pk.10
GV1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
GV1405	1/4" x 0.5 mm ID	pk.10
GV1408	1/4" x 0.8 mm ID	pk.10
GV1416	1/4" x 1/16" ID	pk.10
GV1414	1/4" x 1/4" ID	pk.10
GV1418	1/4" x 1/8" ID	pk.10
GV1460	1/4" x 6.0 mm ID	pk.10
GV1400	1/4", no-hole	pk.10

Short Ferrules for Agilent



Part No.	Description	Qty.
GV1603-HP	1/16" x 0.3 mm ID	pk.10
GV1604-HP	1/16" x 0.4 mm ID	pk.10
GV1605-HP	1/16" x 0.5 mm ID	pk.10
GV1608-HP	1/16" x 0.8 mm ID	pk.10

Standard 1/2"



Part No.	Description	Qty.
GV1212	1/2" x 1/2" ID	pk.5

Ferrules for Carlo Erba

15 % Graphite/85 % Vespel, upper temperature limit 350°C



Part No.	Description	Qty.
29033461	0.4 mm ID for M8-Nut (CE-Taper)	pk.10
29033460	0.5 mm ID for M8-Nut (CE-Taper)	pk.10
29033471	0.8 mm ID for M8-Nut (CE-Taper)	pk.10

Vespe® Ferrules

- Upper temperature limit 350°C
- 100 % high-temperature DuPont Vespel
- Precision-drilled ID – no imperfections from moulding
- One-piece design requires no back ferrule
- Fairly hard – tends to seal permanently to the column

Standard 1/16"



Part No.	Description	Qty.
V1603	1/16" x 0.3 mm ID	pk.10
V1624	1/16" x 0.4 mm ID, 2-hole	pk.10
V1604	1/16" x 0.4 mm ID	pk.10
V1625	1/16" x 0.5 mm ID, 2-hole	pk.10
V1605	1/16" x 0.5 mm ID	pk.10
V1608	1/16" x 0.8 mm ID	pk.10
V1610	1/16" x 1.0 mm ID	pk.10
V1612	1/16" x 1.2 mm ID	pk.10
V1616	1/16" x 1/16" ID	pk.10
V1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
V1804	1/8" x 0.4 mm ID	pk.10
V1825	1/8" x 0.5 mm ID, 2-hole	pk.10
V1805	1/8" x 0.5 mm ID	pk.10
V1828	1/8" x 0.8 mm ID, 2-hole	pk.10
V1808	1/8" x 0.8 mm ID	pk.10
V1816	1/8" x 1/16" ID	pk.10
V1818	1/8" x 1/8" ID	pk.10
V1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
V1416	1/4" x 1/16" ID	pk.10
V1414	1/4" x 1/4" ID	pk.10
V1418	1/4" x 1/8" ID	pk.10
V1400	1/4", no-hole	pk.10

Short Ferrules for Agilent



Part No.	Description	Qty.
V1604-HP	1/16" x 0.4 mm ID	pk.10
V1605-HP	1/16" x 0.5 mm ID	pk.10
V1608-HP	1/16" x 0.8 mm ID	pk.10

PTFE Ferrules

- Upper temperature limit 250°C
- 100 % PTFE – completely inert
- One-piece design requires no back ferrule

Standard 1/16"



Part No.	Description	Qty.
T1603	1/16" x 0.3 mm ID	pk.10
T1604	1/16" x 0.4 mm ID	pk.10
T1605	1/16" x 0.5 mm ID	pk.10
T1608	1/16" x 0.8 mm ID	pk.10
T1610	1/16" x 0.5 mm ID	pk.10
T1612	1/16" x 1.2 mm ID	pk.10
T1616	1/16" x 1/16" ID	pk.10
T1600	1/16", no-hole	pk.10

Standard 1/8"



Part No.	Description	Qty.
T1804	1/8" x 0.4 mm ID	pk.10
T1825	1/8" x 0.5 mm ID, 2-hole	pk.10
T1805	1/8" x 0.5 mm ID	pk.10
T1808	1/8" x 0.8 mm ID	pk.10
T1816	1/8" x 1/16" ID	pk.10
T1818	1/8" x 1/8" ID	pk.10
T1800	1/8", no-hole	pk.10

Standard 1/4"



Part No.	Description	Qty.
T1416	1/4" x 1/16" ID	pk.10
T1414	1/4" x 1/4" ID	pk.10
T1418	1/4" x 1/8" ID	pk.10
T14316	1/4" x 3/16" ID	pk.10
T1400	1/4", no-hole	pk.10

Standard 3/16"



Part No.	Description	Qty.
T316316	3/16" x 3/16" ID	pk.10

Septa for GC Injectors

- Center point guides the needle for easy penetration
- Reduce needle bending
- Precision molding assures accurate fit
- Available in selected sizes of our premium septa
- Packaged in glass vials for high purity

Premium Septa Advanced Green 3

The Advanced Green 3 Septum was specifically created to combine significantly longer injection life, low bleed and low injection port adhesion. The result is a green septum you can use for all your critical analysis. Septa are 3mm thick, except Shimadzu-style plug.



Part No.	Description	Qty.
SA5	5 mm CenterGuide	pk.50
SA9	9 mm CenterGuide	pk.50
SA95	9.5 mm (3/8")	pk.50
SA11	11 mm (7/16") CenterGuide	pk.50
SA11-100	11 mm (7/16") CenterGuide	pk.100
SA115	11.5 mm CenterGuide	pk.50
SA127	12.7 mm (1/2") CenterGuide	pk.50
SA17	17 mm	pk.50
SAS	for Shimadzu	pk.50

Premium Septa Marathon

The Marathon Septum typically achieves 400 injections without failure, when used with a rounded-tip (Agilent-style) needle and autosampler or needle guide. The CenterGuide versions of Marathon are pre-pierced to channel the needle through the same spot with each injection, which helps eliminate the common type of coring that occurs on the first injection. The Marathon septum is also ideal for standard manual-injection GC and GC/MS. Septa are 3mm thick, except Shimadzu-style plug septa.



Part No.	Description	Qty.
SM5-50	5 mm CenterGuide	pk.50
SM9-50	9 mm CenterGuide	pk.50
SM11-50	11 mm (7/16") CenterGuide	pk.50
SM11-100	11 mm (7/16") CenterGuide	pk.100
SM115-50	11.5 mm CenterGuide	pk.50
SM127-50	12.7 mm (1/2") CenterGuide	pk.50
SM17-50	17 mm	pk.50
SMS-50	for Shimadzu	pk.50

Premium Septa BTO

Septa BTO is bleed and temperature optimized for today's most demanding GC and GC/MS applications. Septa BTO is formulated to extend low-bleed and outstanding mechanical properties of premium GC septa to the highest-temperature applications (400°C with most modern GCs).



Part No.	Description	Qty.
SB5	5 mm CenterGuide	pk.50
SB64	6.4 mm (1/4")	pk.50
SB9	9 mm CenterGuide	pk.50
SB95	9.5 mm (3/8")	pk.50
SB10	10 mm	pk.50
SB11	11 mm (7/16") CenterGuide	pk.50
SB11-100	11 mm (7/16") CenterGuide	pk.100
SB115	11.5 mm CenterGuide	pk.50
SB127	12.7 mm (1/2") CenterGuide	pk.50
SB17	17 mm CenterGuide	pk.50
SBS	for Shimadzu	pk.50

Premium Septa Silicone Pure

The Silicone Pure Septum was specifically created to combine significantly longer injection life, low bleed and low injection port adhesion. Usable to 340°C inlet temperature.



Part No.	Description	Qty.
SS95	9.5 mm	pk.25
SS10	10 mm	pk.25
SS11	11 mm	pk.25
SS125	12.5 mm	pk.25
SS17	17 mm	pk.25
SSS	for Shimadzu	pk.25

Septa Pick



The Septa Pick is useful for removing small pieces of septa lodged in the threads and corners of the septum cap or injection port. It can also be used to remove small bits of graphite ferrule from the cap and fittings of column connectors.

Part No.	Description	Qty.
SP	Septa Pick	ea.

BGB Electronic Leak Detector

Prevent small leaks from causing big problems with a BGB leak detector.

Features & Benefits include:

- Detects a broad range of gases.
- Audible tone and LED display indicate the severity of a leak.
- Can be operated during charging or used up to 12 hours between charges.
- Ergonomic, handheld design.
- Rugged side grips for added durability.
- Handy probe storage for cleanliness and convenience.
- Automatic shutoff.
- A convenient carrying and storage case.
- Easy-to-clean probe assembly.
- A universal charger set (CH, European, UK, U.S. and Australian plugs included).
- USB charging cable.
- Manual in German, English, French and Italian.



Accessories for BGB Electronic Leak Detector
www.bgb-shop.com/leak-detector-accessories

Part No.	Description	Qty.
33333-A	BGB Electronic Leak Detector	ea.

Leak Detector Specifications:

Detectable Gases:	Helium, Nitrogen, Argon, Carbon Dioxide, Hydrogen*	
Battery:	Rechargeable nickel-metal hydride (NiMH) battery (up to 12 hours normal operation)	
Ambient Temperature:	10–37 °C	
Humidity Range:	0–97 %	
Warranty:	One year	
Certifications:	CE (EU, Korea, Japan, Australia); UKCA; CSA/UL tested – not listed.	
Compliance:	WEEE, CEC, China RoHS 2	
Limits of Detection and Indicating LED Color:	Helium, 1.0 x 10 ⁻⁵ , red LED	Hydrogen*, 1.0 x 10 ⁻⁵ , red LED
	Nitrogen, 1.4 x 10 ⁻³ , yellow LED	Argon, 1.0 x 10 ⁻⁴ , yellow LED
	Carbon Dioxide, 1.0 x 10 ⁻⁴ , yellow LED	Gas detection limits measured in atm cc/sec.

Avoid using liquid leak detectors on a GC! Liquids can be drawn into the system and/or into the leak detector.

* CAUTION: This unit should only be used to detect trace amounts of hydrogen arising from a small leak in a nonflammable environment, e.g., laboratory room air, etc.


Vials and Accessories

Technical Information

Design of the Neck



Design of the Bottom

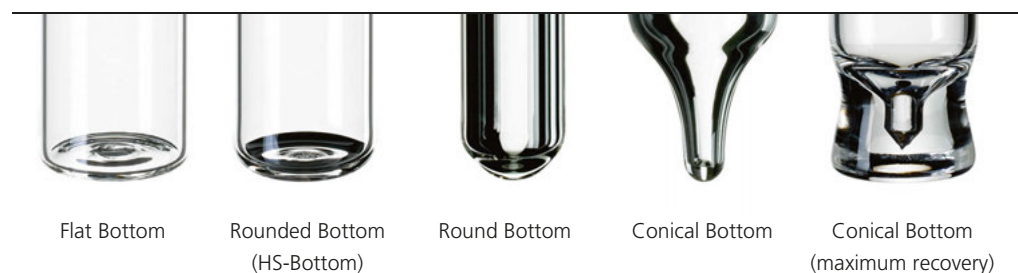

BGB can only guarantee that our caps, vials and inserts will perfectly fit together. For combination with parts from other manufacturers we can not give any guaranty.

Durometer (expressed in ° shore)

Durometer is the hardness of a liner and is expressed in ° shore. The higher the grade the harder the liner; the lower the grade, the softer the liner. The softest liner is 45° shore A and the hardest 70° shore A. Besides the thickness of a liner the hardness is an essential indication when deciding which liner is suitable for the penetration of a certain type of needle (fragile needles, thin or thick needles, sharp or dull needles, etc.)

Silanized

Silanized vials are used to reduce the adsorption of polar compounds onto the normally polar surface of the glass container. Some compounds like amino-acids, proteins or phenols tend to react with the OH-groups of the glass, even if – as is common for chromatography – 1st hydrolytic class glass is used. Through the silanization process the glass surface is deactivated and so possible reactions between the polar compounds and the glass are eliminated.

ND8 Crimp Neck Vials

Borosilicate glass – 1st hydrolytic class



Volume	0.7 ml	0.7 ml	0.6 ml	0.6 ml	0.4 ml
Dimension	40 x 7 mm	40 x 7 mm	40 x 7 mm	40 x 7 mm	30 x 7 mm
Glass Type	clear	amber	clear	amber	amber
Bottom	flat	flat	conical	conical	conical
Part No.	08040006	08040106	08040007	08040107	151142
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

Volume	1.2 ml	1.2 ml	0.8 ml	0.2 ml	0.3 ml
Dimension	40 x 8.2 mm	40 x 8.2 mm	30 x 8.2 mm	31.5 x 5.5 mm	31.5 x 5.5 mm
Glass Type	amber	clear	clear	clear	clear
Bottom	flat	flat	flat	conical	round
Part No.	08040105	08040005	08040009	0800030	0800035
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND8 Aluminium Crimp Caps

Septa	Natural Rubber/TEF	Silicone Rubber/PTFE	Silicone/PTFE Ultra Clean	PTFE/Silicone/PTFE	Silicone/PTFE slitted	PTFE only
Part No.	080310-N	080310	080301	080302	080313	080304
Qty.	pk.1000	pk.1000	pk.100	pk.100	pk.100	pk.1000



BGB Crimper and Decapper
see page 48

ND11 Crimp Neck Vials

Borosilicate glass – 1st hydrolytic class



			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber
Opening	wide	wide	wide
Miscellaneous	-	silanized	-
Part No.	11K	11KS	11B
Qty.	pk.100	pk.100	pk.100

			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	amber	amber
Opening	wide	wide	wide
Labeling	label & filling lines	label & filling lines	label & filling lines
Miscellaneous	-	-	silanized
Part No.	11KW	11BW	11BWS
Qty.	pk.100	pk.100	pk.100

			
Volume	1.5 ml	0.3 ml	0.3 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber
Opening	narrow (5.3 mm)	-	-
Labeling	-	label	label
Miscellaneous	-	integrated insert base bonded	integrated insert base bonded
Part No.	110400	110420	110421
Qty.	pk.100	pk.100	pk.100



PP Vial Rack
190 x 100 x 22 mm
for Standard 2 ml Vials up to 12 mm OD
50 Positions
-
-
BGB-VIALRACK
ea. Quantity breaks available

ND11 Crimp Neck – Crimp/Snap Vials

Borosilicate glass – 1st hydrolytic class, Polypropylene (PP) or Polymethylpentene (TPX)



					
Volume	1.1 ml	0.7 ml	0.3 ml	0.3 ml	0.3 ml
Neck	Crimp	Crimp/Snap	Crimp/Snap	Crimp/Snap	Crimp/Snap
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Type	clear glass	clear PP	clear PP	amber PP	clear TPX
Miscellaneous	conical bottom	-	integrated insert	integrated insert	integrated insert
Part No.	110411	PPCV1107K	PPCV1103K	PPCV1103B	TPXCV1103K
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 Aluminium Crimp Caps with Septa Natural Rubber/TEF, Thickness 1.0 mm


					
Color	silver	blue	red	green	yellow
Part No.	11031201	11031201-BN	11031201-RN	11031201-GN	11031201-YN
Qty.	pk.1000	pk.1000	pk.1000	pk.1000	pk.1000

ND11 Aluminium Crimp Caps with Septa Silicone Rubber/PTFE, Thickness 1.0 mm

					
Color	silver	blue	red	green	yellow
Part No.	11031201-S	11031201-B	11031201-R	11031201-G	11031201-Y
Qty.	pk.1000	pk.1000	pk.1000	pk.1000	pk.1000



BGB Crimper and Decapper
see page 48



Glass Inserts for ND11 Vials
see page 31

ND11 Aluminium Crimp Caps with Septa Silicone/PTFE, Ultra Clean, Thickness 1.3 mm

					
					
Color	silver	blue	red	green	yellow
Part No.	11030101	11030101-B	11030101-R	11030101-G	11030101-Y
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 Aluminum or Magnetic Crimp Caps with different Septa

					
					
Material	Aluminum	Aluminum	Aluminum	Magnetic	Magnetic
Color	silver	silver	silver	yellow	yellow
Septa	PTFE/Silicone/PTFE	Silicone/PTFE X-slitted	PTFE only	Silicone/PTFE Ultra Clean	PTFE/Silicone/PTFE
Part No.	11030201	11031301-X	11030401	11030101-M	11030201-M
Qty.	pk.100	pk.100	pk.1000	pk.100	pk.100



Vial Racks and Storage Boxes
see page 51

BGB Easy Grip Manual Crimper and Decapper

Our Easy Grip Manual Crimper and Decapper for all 8, 11, 13 and 20 mm crimp caps. The curved handle features comfortable use compared to metal grip designs. The bottom-pull handle allows for a steadier hold than top-push handles. The adjustment knob is positioned at the head of the crimper to simplify adjustment of the crimp intensity.



Part No.	Description	Qty.
295000	8 mm Crimper	ea.
295001	11 mm Crimper	ea.
295002	13 mm Crimper	ea.
295003	13 mm Crimper for Flip Off and Tear Off Caps	ea.
295004	20 mm Crimper	ea.
295005	20 mm Crimper for Flip Off and Tear Off Caps	ea.
295006	11 mm Decapper	ea.
295007	13 mm Decapper	ea.
295008	20 mm Decapper	ea.

Glass Inserts for ND11 Vials

Borosilicate glass – 1st hydrolytic class



for ND11 Wide Opening Vials

Volume
Dimension
Bottom
Miscellaneous

Part No.
Qty.



250 µl
31 x 6 mm
Conical
Tip: 15 mm

110503
pk.100

250 µl
31 x 6 mm
Conical
Tip: 15 mm
silanized

110503-S
pk.100

300 µl
31 x 6 mm
Conical
Tip: 12 mm

110502
pk.100

350 µl
31 x 6 mm
Flat
-

110506
pk.100

250 µl
29 x 5.7 mm
Conical
with Plastic Spring

110507
pk.100

250 µl
29 x 5.7 mm
Conical
with Plastic Spring
silanized

110507-S
pk.100

for ND11 Narrow Opening Vials

Volume
Dimension
Bottom
Miscellaneous

Part No.
Qty.



150 µl
31 x 5 mm
Conical
Tip: 15 mm

110500
pk.100

200 µl
31 x 5 mm
Conical
Tip: 9 mm

110501
pk.100

260 µl
31 x 5 mm
Flat
-

110505
pk.100

150 µl
29 x 5 mm
Conical
with Plastic Spring

110508
pk.100

110 µl
27.5 x 4 mm
Conical
requires Spring 150614

110504
pk.100

Metal Spring
36 x 5 mm
-
for Insert 110504

150614
pk.100

BGB Electronic Crimper and Decapper Model 6

Our new Electronic Crimpers and Decappers with enhanced OLED screen displays fit on standard laboratory vials and seals with aluminum or two-part aluminum/steel caps. The electronically adjustable cycle is accurate and reproducible and can be adjusted on the display of the unit. The tools are ergonomically designed to reduce strain and arm injury associated with many manual crimping tools.




Part No.	Description	Qty.
297040	8 mm Crimper Model 6	ea.
297041	11 mm Crimper Model 6	ea.
297042	13 mm Crimper Model 6	ea.
297043	13 mm Crimper Model 6 for Flip Off and Tear Off Caps	ea.
297044	20 mm Crimper Model 6	ea.
297045	20 mm Crimper Model 6 for Flip Off and Tear Off Caps	ea.
297046	11 mm Decapper Model 6	ea.
297047	13 mm Decapper Model 6	ea.
297048	20 mm Decapper Model 6	ea.

ND11 Crimp/Snap Vials

Borosilicate glass – 1st hydrolytic class



				
Volume	1.5 ml	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	clear	clear
Opening	wide	wide	wide	wide
Labeling	-	-	label & filling lines	label & filling lines
Miscellaneous	-	silanized	-	silanized
Part No.	11SR	11SRS	11SRW	11SRWS
Qty.	pk.100	pk.100	pk.100	pk.100

					
Volume	1.5 ml	1.5 ml	0.3 ml	0.3 ml	0.9 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	amber	amber	clear	amber	clear
Opening	wide	wide	-	-	wide
Labeling	label & filling lines	label & filling lines	-	-	-
Miscellaneous	-	silanized	integrated insert base bonded	integrated insert base bonded	total Microliter
Part No.	11SRBW	11SRBWS	11KI	11BI	11K-ML
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 Crimp/Snap Vials

PP (Polypropylene) or TPX (Polymethylpentene)

					
Volume	0.7 ml	0.3 ml	0.3 ml	0.3 ml	0.2 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Type	clear PP	clear PP	amber PP	clear TPX	clear TPX
Miscellaneous	-	integrated insert	integrated insert	integrated insert	integrated glass insert
Part No.	PPCV1107K	PPCV1103K	PPCV1103B	TPXCV1103K	TPXCV1102
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 PE Snap Ring Caps with Septa Natural Rubber/TEF, Thickness 1.0 mm

						
Color	transparent	blue	red	green	yellow	pink
Part No.	SRC300-TN	SRC300-BN	SRC300-RN	SRC300-GN	SRC300-YN	SRC300-PN
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 PE Snap Ring Caps with Septa Silicone/PTFE, Ultra Clean Thickness 1.3 mm

						
Color	transparent	blue	red	green	yellow	pink
Part No.	SRC301-T	SRC301-B	SRC301-R	SRC301-G	SRC301-Y	SRC301-P
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 PE Snap Ring Caps with X-slitted Septa Silicone/PTFE, Thickness 1.0 mm

						
Color	transparent	blue	red	green	yellow	pink
Part No.	SRC313-T	SRC313-B	SRC313-R	SRC313-G	SRC313-Y	SRC313-P
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND11 PE Snap Ring Caps with Septa PTFE/Silicone/PTFE, Thickness 1.0 mm


						
Color	transparent	blue	red	green	yellow	pink
Part No.	SRC302-T	SRC302-B	SRC302-R	SRC302-G	SRC302-Y	SRC302-P
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Continued on page 34.



Vial Racks and Storage Boxes
see page 51

ND11 PE Snap Ring Caps with Septa Silicone Rubber/PTFE, Thickness 1.0 mm

		
Color	transparent	blue
Part No.	SRC300-T	SRC300-B
Qty.	pk.100	pk.100

Glass Inserts for ND11 Snap Ring Vials

Borosilicate glass - 1st hydrolytic class



						
Volume	250 µl	250 µl	300 µl	350 µl	250 µl	250 µl
Dimension	31 x 6 mm	31 x 6 mm	31 x 6 mm	31 x 6 mm	29 x 5.7 mm	29 x 5.7 mm
Bottom	Conical	Conical	Conical	Flat	Conical	Conical
Miscellaneous	Tip: 15 mm	Tip: 15 mm <i>silanized</i>	Tip: 12 mm		with Plastic Spring	with Plastic Spring <i>silanized</i>
Part No.	110503	110503-S	110502	110506	110507	110507-S
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100



Vial Racks and Storage Boxes
see page 51

ND8 (8-425) Screw Neck Vials

Borosilicate glass – 1st hydrolytic class



				
Volume	1.5 ml	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber	clear
Opening	narrow	narrow	narrow	narrow
Labeling	-	-	-	label & filling lines
Miscellaneous		silanized		
Part No.	080400	080400-S	080401	080400-W
Qty.	pk.100	pk.100	pk.100	pk.100

			
Volume	1.5 ml	1.5 ml	1.1 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	amber	amber	clear
Opening	narrow	narrow	narrow
Labeling	label & filling lines	label & filling lines	-
Miscellaneous		silanized	conical bottom
Part No.	080401-W	080401-WS	080410
Qty.	pk.100	pk.100	pk.100



Glass Inserts for ND8 (8-425) Screw Neck Vials

Borosilicate glass – 1st hydrolytic class

						
Volume	150 µl	200 µl	260 µl	150 µl	110 µl	Metal Spring
Dimension	31 x 5 mm	31 x 5 mm	31 x 5 mm	29 x 5 mm	27.5 x 4 mm	36 x 5 mm
Bottom	Conical	Conical	Flat	Conical	Conical	-
Miscellaneous	Tip: 15 mm	Tip: 9 mm	-	with Plastic Spring	requires Spring 150614	for Insert 110504
Part No.	110500	110501	110505	110508	110504	150614
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND8 (8-425) PP Screw Caps, 5.5 mm Center Hole with Septa

					
Color	black	pink	black	pink	black
Septa	Natural Rubber/TEF	Natural Rubber/TEF	Silicone Rubber/PTFE	Silicone Rubber/PTFE	Silicone/PTFE Ultra Clean
Part No.	070300	070300-P	070300-SR	070300-SR-P	070301
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

Best Seller

ND8 (8-425) PP Screw Caps, 5.5 mm Center Hole with Septa

					
Color	pink	black	pink	black	pink
Septa	Silicone/PTFE Ultra Clean	PTFE/Silicone/PTFE	PTFE/Silicone/PTFE	Silicone/PTFE slitted	Silicone/PTFE slitted
Part No.	070301-P	070302	070302-P	070313	070313-P
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND8 (8-425) PP Screw Caps Center Hole and Closed Top without Septa

					
Color	black	pink	white	black	white
Hole	5.5 mm	5.5 mm	5.5 mm	without hole	without hole
Part No.	080800	080800-P	080800-W	080801	080801-W
Qty.	pk.1000	pk.1000	pk.1000	pk.1000	pk.1000

Septa for ND8 (8-425) Screw Caps

							
Material	Natural Rubber/TEF	Silicone Rubber/PTFE	Silicone/PTFE (white/blue)	Silicone/PTFE (white/red)	PTFE/Silicone/PTFE	Silicone/PTFE slitted	PTFE only
Thickness	1.3 mm	1.0 mm	1.1 mm	1.5 mm	1.0 mm	0.9 mm	0.25 mm thick
Part No.	080200	080200-SR	080201	080201-R	080202	080213	080204
Qty.	pk.1000	pk.1000	pk.100	pk.100	pk.100	pk.100	pk.1000



Vial Racks and Storage Boxes
see page 51

ND9 (9-425) Short Neck Screw Vials

Borosilicate glass – 1st hydrolytic class



			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	clear	amber
Opening	wide	wide	wide
Miscellaneous	-	silanized	-
Part No.	080400-XL	080400-XLS	080401-XL
Qty.	pk.100	pk.100	pk.100

			
Volume	1.5 ml	1.5 ml	1.5 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Glass Type	clear	amber	amber
Opening	wide	wide	wide
Labeling	label and filling lines	label and filling lines	label and filling lines
Miscellaneous	-	-	silanized
Part No.	080400-XLW	080401-XLW	080401-XLWS
Qty.	pk.100	pk.100	pk.100

					
Volume	0.3 ml	0.3 ml	0.7 ml	0.3 ml	0.3 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm	32 x 11.6 mm
Type	clear glass	amber glass	clear PP *	clear PP	clear TPX
Labeling	label	label	-	-	-
Miscellaneous	integrated insert base bonded	integrated insert base bonded	-	integrated insert	integrated insert
Part No.	080420	080421	PPSV0907K	PPSV0903K	TPXSV0903K
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

* for Ion Chromatography

Inserts and Caps for ND9 Short Neck Screw Vials
see page 38 – 39

Glass Inserts for ND9 (9-425) Short Neck Screw Vials

Borosilicate glass – 1st hydrolytic class



						
Volume	250 µl	250 µl	300 µl	350 µl	250 µl	250 µl
Dimension	31 x 6 mm	31 x 6 mm	31 x 6 mm	31 x 6 mm	29 x 5.7 mm	29 x 5.7 mm
Bottom	Conical	Conical	Conical	Flat	Conical	Conical
Miscellaneous	Tip: 15 mm	Tip: 15 mm silanized	Tip: 12 mm	-	with Plastic Spring	with Plastic Spring silanized
Part No.	110503	110503-S	110502	110506	110507	110507-S
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Natural Rubber/TEF, Thickness 1.0 mm

							
Color	black	blue	red	green	yellow	pink	transparent
Part No.	090300-N	090300-BN	090300-RN	090300-GN	090300-YN	090300-PN	090300-TN
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Silicone Rubber/PTFE, Thickness 1.0 mm

							
Color	black	blue	red	green	yellow	pink	transparent
Part No.	090300	090300-B	090300-R	090300-G	090300-Y	090300-P	090300-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa Silicone/PTFE, Ultra Clean, Thickness 1.0 mm

							
Color	black	blue	red	green	yellow	pink	transparent
Part No.	090301	090301-B	090301-R	090301-G	090301-Y	090301-P	090301-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with slitted Septa Silicone/PTFE, Thickness 1.0 mm

							
Color	black	blue	red	green	yellow	pink	transparent
Part No.	090313	090313-B	090313-R	090313-G	090313-Y	090313-P	090313-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa PTFE/Silicone/PTFE, Thickness 1.0 mm

							
Color	black	blue	red	green	yellow	pink	transparent
Part No.	090302	090302-B	090302-R	090302-G	090302-Y	090302-P	090302-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND9 (9-425) PP Short Thread Screw Caps, 6 mm Center Hole with Septa PTFE only, Thickness 0.2 mm

							
Color	black	blue	red	green	yellow	pink	transparent
Part No.	090304	090304-B	090304-R	090304-G	090304-Y	090304-P	090304-T
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100



Vial Racks and Storage Boxes
see page 51

ND13 (13-425) Screw Vials

Borosilicate glass – 1st hydrolytic class



Volume
Dimension
Glass Type
Labeling

4 ml
45 x 14.7 mm
clear
-

4 ml
45 x 14.7 mm
amber
-

4 ml
45 x 14.7 mm
clear
label and filling lines

4 ml
45 x 14.7 mm
amber
label and filling lines

Part No.
Qty.

130400
pk.100

130401
pk.100

130400-W
pk.100

130401-W
pk.100



Volume
Dimension
Type
Miscellaneous

Glass Insert 0.3 ml
40 x 6 mm
Tip 15 mm
requires Spring 150715

Metal Spring
50 x 7.5 mm
-
for Insert 150714

Part No.
Qty.

150714
pk.100

150715
pk.100



PP Vial Rack
for Standard 4 ml Vials
(230 x 117 x 28 mm)
50 Positions

VR15
pk.5



Vial Racks and Storage Boxes
see page 51

ND13 (13-425) PP Screw Caps, 8.5 mm Center Hole with Septa

				
Color	black	black	black	black
Septa	Natural Rubber/TEF	Silicone/PTFE	PTFE/Silicone/PTFE	cross-slitted Silicone/PTFE
Thickness	1.3 mm	1.5 mm	1.0 mm	1.5 mm
Part No.	120300	120301	120302	120313
Qty.	pk.100	pk.100	pk.100	pk.100

ND13 (13-425) PP Screw Caps, 8.5 mm Center Hole and Closed Top without Septa

				
Color	black	black	white	white
Hole	8.5 mm	without hole	8.5 mm	without hole
Part No.	130800	130801	130800-W	130801-W
Qty.	pk.1000	pk.1000	pk.1000	pk.1000

Septa for ND13 (13-425) Screw Caps

					
Material	Natural Rubber/TEF	Silicone/PTFE	PTFE/Silicone/PTFE	Silicone/PTFE	PTFE only
Thickness	1.3 mm	1.5 mm	1.0 mm	1.5 mm	0.25 mm
Part No.	120200	120201	120202	120213	120204
Qty.	pk.1000	pk.1000	pk.1000	pk.1000	pk.1000

ND18 Headspace Screw Vials

Borosilicate glass – 1st hydrolytic class



for CTC-
Autosamplers

				
				
Volume	20 ml	20 ml	10 ml	10 ml
Dimension	75.5 x 22.5 mm	75.5 x 22.5 mm	46 x 22.5 mm	46 x 22.5 mm
Glass Type	clear	amber	clear	amber
Bottom	rounded	rounded	rounded	rounded
Part No.	180420	180420-B	180410	180410-B
Qty.	pk.100	pk.100	pk.100	pk.100

ND20 Headspace Crimp Vials

Borosilicate glass – 1st hydrolytic class

for CTC-
Autosamplers

					
					
Volume	20 ml	20 ml	10 ml	10 ml	20 ml SPME
Dimension	75.5 x 22.5 mm	75.5 x 22.5 mm	46 x 22.5 mm	46 x 22.5 mm	75.5 x 22.5 mm
Glass Type	clear	amber	clear	amber	clear
Bottom	rounded	rounded	rounded	rounded	rounded
Miscellaneous	-	-	-	-	with special crimp neck
Part No.	200420-CTC	200420-CTC-B	200410-CTC	200410-CTC-B	200420-CTC-SPME
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

						
Volume	20 ml	10 ml	20 ml	20 ml	20 ml	5 ml
Dimension	75.5 x 22.5 mm	46 x 22.5 mm	75.5 x 23 mm	75.5 x 23 mm	75.5 x 23 mm	38.2 x 22 mm
Glass Type	clear	clear	clear	clear	amber	clear
Bottom	flat	flat	rounded	rounded	rounded	rounded
Labeling	-	-	-	with label and filling lines	-	-
Miscellaneous	with long DIN crimp neck	with long DIN crimp neck	-	-	-	-
Part No.	200420-FF	200410-FF	200420	200421	200420-B	200406
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND18 Magnetic Screw Caps, 8 mm Center Hole with Septa

						
Septa	Butyl/PTFE	Silicone/PTFE (blue/white)	Silicone/PTFE (white/blue)	Silicone/PTFE (white/red)	Silicone/Aluminum (white/alu)	Silicone/PTFE Ultra High Temperature
Thickness	1.6 mm	1.3 mm	1.5 mm	1.3 mm	1.3 mm	3.0 mm
Part No.	180300	180301	180305	180306	180307	180308
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

ND20 Aluminium Crimp Caps, 10 mm Center Hole with Septa

					
Septa	Butyl	Butyl/PTFE	«Parma-Fix»	Silicone/PTFE	Silicone/Aluminum
Part No.	20030000	20030100	20030300	20030500	20030700
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND20 Magnetic Crimp Caps, 5 mm Center Hole with Septa

					
Septa	Butyl	Butyl/PTFE	«Parma-Fix»	Silicone/PTFE	Silicone/Aluminum
Part No.	20030004	20030104	20030304	20030504	20030704
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

ND20 Magnetic Crimp Caps, 8 mm Center Hole with Septa

						
Septa	Butyl Septa	Butyl/PTFE Septa	«Pharma Fix» Septa	Silicone/PTFE Septa	Butyl/PTFE Septa	Silicone/PTFE Septa
Part No.	20030004-SPME	20030104-SPME	20030304-SPME	20030504-SPME	20030104-BIR	20030504-BIR
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Magnetic Caps with Silicone/PTFE SPME MicroCenter Septa

		
Description	ND18 Magnetic Screw Cap	ND20 Magnetic Crimp Cap
Septa	Silicone/PTFE SPME MicroCenter Septa	Silicone/PTFE SPME MicroCenter Septa
Part No.	180315	20031504-SPME
Qty.	pk.100	pk.100

Shell Vials

Borosilicate glass – 1st hydrolytic class



						
Volume	1 ml	1 ml	2 ml	2 ml	4 ml	4 ml
Dimension	40 x 8.2 mm	40 x 8.2 mm	31.5 x 11.6 mm	31.5 x 11.6 mm	44.6 x 14.65 mm	44.6 x 14.65 mm
Glass Type	clear	amber	clear	amber	clear	amber
Miscellaneous	PE Plug	PE Plug	PE Plug	PE Plug	PE Plug	PE Plug
Part No.	SV1ML	SV1MLB	SV2ML	SV2MLB	SV4ML	SV4MLB
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Best Seller

Sample Storage Screw Vials and EPA Sample Storage Screw Vials

Borosilicate glass – 1st hydrolytic class

						
Volume	1.5 ml	1.5 ml	4 ml	4 ml	8 ml	8 ml
Dimension	32 x 11.6 mm	32 x 11.6 mm	45 x 14.7 mm	45 x 14.7 mm	61 x 16.6 mm	61 x 16.6 mm
Glass Type	clear	amber	clear	amber	clear	amber
Thread	8-425	8-425	13-425	13-425	15-425	15-425
Part No.	SF2	SF2-B	SF4	SF4-B	SF8	SF8-B
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

						
Volume	12 ml	12 ml	16 ml	20 ml	20 ml EPA	20 ml EPA
Dimension	66 x 18.5 mm	66 x 18.5 mm	71 x 20.6 mm	86 x 22.5 mm	57 x 27.5 mm	57 x 27.5 mm
Glass Type	clear	amber	clear	clear	clear	amber
Thread	15-425	15-425	18-400	20-400	24-400	24-400
Part No.	SF12	SF12-B	SF16	SF20	EPA20	EPA20-B
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

EPA Sample Storage Screw Vials

Borosilicate glass – 1st hydrolytic class



Volume	30ml EPA	30ml EPA	40ml EPA	40ml EPA	60ml EPA	60ml EPA
Dimension	72.5 x 27.5 mm	72.5 x 27.5 mm	95 x 27.5 mm	95 x 27.5 mm	140 x 27.5 mm	140 x 27.5 mm
Glass Type	clear	amber	clear	amber	clear	amber
Thread	24-400	24-400	24-400	24-400	24-400	24-400
Part No.	EPA30	EPA30-B	EPA40	EPA40-B	EPA60	EPA60-B
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

PP Screw Caps Closed Top with Septa Butyl/PTFE, Thickness 1.3 mm

Color	black	black	black	black	white	white
Thread	8-425	13-425	15-425	18-400	20-400	24-400
Part No.	SV-8-425	SV-13-425	SV-15-425	SV-18-400	SV-20-400	SV-24-400
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

Screw Caps Closed Top white with Septa PTFE/PE Foam Liner, Thickness 1.3 mm

Cap Material	Urethane	PP	PP	PP	PP
Thread	13-425	15-425	18-400	20-400	24-400
Part No.	SV-13-425-P	SV-15-425-P	SV-18-400-P	SV-20-400-P	SV-24-400-P
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

EPA ND24 PP Screw Caps with 12.5 mm Center Hole and Septa

Color	white	white, for EPA Vials	EPA Septa	
Thread	24-400	24-400	-	
Septa	Silicone/PTFE	without Septa	Silicone/PTFE	
Thickness	3.2 mm		3.2 mm	
Part No.	SV-EPA	SV-EPA-CAP	SV-EPA-SEPTA	
Qty.	pk.100	pk.100	pk.100	

Urea Screw Caps Closed Top
with PE Foam/PTFE Liner
see page 46

Urea Screw Caps Closed Top green with PE Foam/PTFE Liner



- Wide range of chemical compatibility
- Most temperature tolerant of plastic closures

Thread Part No. Qty.				
	8-425 QP-272635 pk.100	13-425 QP-272632 pk.100	15-425 QP-272633 pk.100	18-400 QP-272634 pk.100
Thread Part No. Qty.				
	20-400 QP-272626 pk.100	22-400 QP-272627 pk.100	24-400 QP-272628 pk.100	



PP Storage Box
for 28 mm OD EPA Vials
130 x 130 x 80 mm
16 Positions

PPSB28A-V
ea.

Mini Reaction Vials with Open Hole Screw Cap and PTFE/Silicone Septa

Borosilicate glass

					
Volume	10 ml	10 ml	5 ml	3 ml	1 ml
Glass Type	clear	amber	clear	clear	clear
Thread	20-400	20-400	20-400	20-400	13-425
Specifications	Vial OD: ~22.3 mm Vial Opening ID: ~13.3 mm Heigh w. Cap: ~84.1 mm Heigh w/o Cap: ~80.8 mm	Vial OD: ~22.3 mm Vial Opening ID: ~13.3 mm Heigh w. Cap: ~84.1 mm Heigh w/o Cap: ~80.8 mm	Vial OD: ~19.5 mm Vial Opening ID: ~13.2 mm Heigh w. Cap: ~63.8 mm Heigh w/o Cap: ~60.3 mm	Vial OD: ~20.5 mm Vial Opening ID: ~13.3 mm Heigh w. Cap: ~52.0 mm Heigh w/o Cap: ~48.4 mm	Vial OD: ~12.5 mm Vial Opening ID: ~7.8 mm Heigh w. Cap: ~48.5 mm Heigh w/o Cap: ~45.3 mm
Part No.	MRV-10	MRVA-10	MRV-5	MRV-3	MRV-1
Qty.	pk.12	pk.12	pk.12	pk.12	pk.12

Mininert® Valves Screw Caps

- Temperature: The valves can be used up to 40 °C (105 °F). Note: After use at high temperatures, the valve may leak slightly when cooled down.
- Pressure: Valves can be used up to 8 bar (120 psi). Note: Pressurization of glass vials can be extremely dangerous and is not recommended.

					
Thread	24-400	20-400	18-400	15-425	13-425
Part No.	MV-24T	MV-20T	MV-18T	MV-15T	MV-13T
Qty.	pk.12	pk.12	pk.12	pk.12	pk.12

Screw Caps Open Hole with Septa Silicone/PTFE for Mini Reaction Vials

		
Color	black	black
Thread	20-400 for MRV-3, MRV-5, MRV-10	13-425 for MRV-1
Part No.	MRV-CS2	MRV-CS1
Qty.	pk.48	pk.48

Specifications for Screw Caps:

- Black Phenolic Cap: max. Temp. 149 °C
- PTFE/Silicone Septa: max. Temp. 250 °C

Note: Be aware that using the caps in combination with reaction vials at elevated temperatures can increase the internal pressure. Maximum working temperatures might be affected and working temperatures are decreased.

BGB Easy Grip Manual Crimper and Decapper

Our Easy Grip Manual Crimper and Decapper for all 8, 11, 13 and 20 mm crimp caps. The curved handle features comfortable use compared to metal grip designs. The bottom-pull handle allows for a steadier hold than top-push handles.

An easily-viewed adjustment knob is located at the head of the crimper and decapper. The clearly shown + and - symbols along with the directional arrows, simplify adjusting the intensity of the crimp or decap needed. The knob is also designed to indicate when the crimp setting has been reached, when it fully contacts the body of the crimper/decapper.



All Easy Grip Manual Crimper and Decapper are equipped with an adjustment knob.



Part No.	Description	Qty.
295000	8 mm Crimper	ea.
295001	11 mm Crimper	ea.
295002	13 mm Crimper	ea.
295003	13 mm Crimper for Flip Off and Tear Off Caps	ea.
295004	20 mm Crimper	ea.
295005	20 mm Crimper for Flip Off and Tear Off Caps	ea.
295006	11 mm Decapper	ea.
295007	13 mm Decapper	ea.
295008	20 mm Decapper	ea.



Easy to use.



BGB Classic Manual Crimper and Decapper

- Chemically resistant surface finish especially designed for the application in the labs.
- Hardened crimping jaws made of special alloy that guarantees long life
- Adjustable in crimping pressure limitation by a screw in the handle
- Additionally 11 mm, 13 mm and 20 mm crimpers are adjustable in crimping height by screwing up or down the pressure block in the crimping head with a hexagon key.



Part No.	Description	Qty.
295020	8 mm Crimper	ea.
295021	11 mm Adjustable Crimper	ea.
295022	13 mm Adjustable Crimper	ea.
295023	13 mm Adjustable Crimper for Flip Off and Tear Off Caps	ea.
295024	20 mm Adjustable Crimper	ea.
295025	20 mm Adjustable Crimper for Flip Off and Tear Off Caps	ea.
295026	8 mm Decapper	ea.
295027	11 mm Decapper	ea.
295028	13 mm Decapper	ea.
295029	20 mm Decapper	ea.

BGB Electronic Crimper and Decapper Model 6



Our new Electronic Crimpers and Decappers with enhanced OLED screen displays fit on standard laboratory vials and seals with aluminum caps. The electronically adjustable cycle is accurate and reproducible and can be adjusted on the display of the unit. The tools are ergonomically designed to reduce strain and arm injury associated with many manual crimping tools.

- Powerful motor with fast cycle
- Longer lasting battery with Lithium Ion technology
- Advanced charging system including warning light when recharging is necessary
- Can be operated while charging
- Controls on top of unit with enhanced OLED Screen

Note: Not suitable for all-steel or magnetic ring crimp caps, please use High Power Electronic Crimping Tool (see page 50) for this type of caps.

OLED screen display

Easy to use.

Part No.	Description	Qty.
297040	8 mm Crimper Model 6	ea.
297041	11 mm Crimper Model 6	ea.
297042	13 mm Crimper Model 6	ea.
297043	13 mm Crimper Model 6 for Flip Off and Tear Off Caps	ea.
297044	20 mm Crimper Model 6	ea.
297045	20 mm Crimper Model 6 for Flip Off and Tear Off Caps	ea.
297046	11 mm Decapper Model 6	ea.
297047	13 mm Decapper Model 6	ea.
297048	20 mm Decapper Model 6	ea.

BGB Crimping Tool Stand

Stand for BGB Electronic and Easy Grip Manual Crimpers and Decappers.

Examples of use.

Part No.	Description	Qty.
295080	Crimping Tool Stand	ea.



BGB High Power Electronic Crimping Tool HPS Model 6

The High Power Electronic Crimping Tool with new OLED screen display is faster and more powerful than the electronic crimping tool. The HPS crimping tool is designed to store separate programs for different caps and seals. It is powered by a universal power supply and uses interchangeable jaw sets. Jaw sets are strong enough to crimp all steel and magnetic caps.

- High-Power version of electronic crimping tool with fixed power supply and cord (no battery).
- Uses interchangeable jaw sets.
- Stores separate programs for different caps and seals.
- Strong enough for all steel and magnetic caps.
- Optional base with mounting kit.



OLED screen display

Part No.	Description	Qty.
297060	High Power Electr. Crimping Tool Model 6	ea.



High Power Electronic Crimping Tool is not included.

Part No.	Description	Qty.
295061	Base with Mounting Kit	ea.

Jaw Sets for BGB High Power Electronic Crimping Tool HPS

						
Dimension Tool	8mm Crimper	11mm Crimper	13mm Crimper	13mm Crimper for Flip Off and Tear Off Caps	20mm Crimper	20mm Crimper for Flip Off and Tear Off Caps
Part No.	295062	295063	295064	295065	295066	295067
Qty.	ea.	ea.	ea.	ea.	ea.	ea.

					
Dimension Tool	11mm Decapper	13mm Decapper	20mm Decapper		
Part No.	295068	295069	295070		
Qty.	ea.	ea.	ea.		

Jaw Sets are easy to change. Simply insert the jaw set into the bushing at the bottom of the tool. Push up and twist until the set locks into position.
To remove, push the outside button and rotate.

PP Vial Racks



Application
Dimensions
Positions
Part No.
Qty.

For Standard 2 ml Vials up to 12 mm OD
190 x 100 x 22 mm
50
BGB-VIALRACK
ea.

Quantity breaks available



For Standard 4 ml Vials up to 15 mm OD
230 x 117 x 28 mm
50
VR15
pk.5

PP Storage Boxes




Application
Dimensions
Positions
Color
Part No.
Qty.

for 12 mm OD Vials
130 x 130 x 45 mm
81
blue
PPSB12-B
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
orange
PPSB12-O
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
pink
PPSB12-P
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
yellow
PPSB12-Y
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
green
PPSB12-G
ea.



for 12 mm OD Vials
130 x 130 x 45 mm
81
transparent
PPSB12-T
ea.



Application
Dimensions
Positions
Color
Part No.
Qty.

for 15 mm OD Vials
130 x 130 x 52 mm
49
red
PPSB15-R
ea.



for 24 mm OD Vials
130 x 130 x 102 mm
25
blue
PPSB24-B
ea.




for 28 mm OD EPA Vials
130 x 130 x 80 mm
16
violett
PPSB28A-V
ea.



for 28 mm OD EPA Vials
130 x 130 x 105 mm
10
violett
PPSB28B-V
ea.

BGB Filter Vials

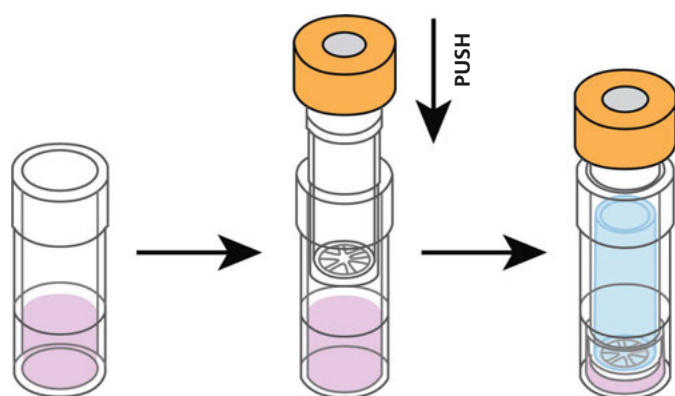

Filter vials provide an efficient, single-step filtering sample preparation process that quickly and easily cleans up your samples. They increase sample integrity by retaining the complete sample inside the vial. The filter vials are compatible with most autosamplers; pre-slitted caps ensure that the autosampler needle can easily penetrate the vial. Filter vials are easy to press and can be used with a Multi-Vial Compressor System or manually.

Filter vials are an all-in-one filtration product that reduces waste by replacing the disposable syringes, syringe filters, glass vials and caps of the classic sample preparation process. They are available with 0.20µm and 0.45µm nylon, PES, PTFE, PVDF and regenerated cellulose (RC) membrane filters.

- For high-throughput chromatographic analysis
- Vial dimensions 32mm x 12mm (height x diameter)
- Polypropylene housing and piston
- Pre-slitted PP cap with PTFE/silicone septa
- 480µL max. fill volume
- 30µL dead volume
- 50°C (120°F) max. operating temperature
- 0.6bar (8psi) compression force



Pre-slitted PP cap with PTFE/silicone septa

Dimension	32 x 12mm	32 x 12mm	32 x 12mm	32 x 12mm
Membrane	Nylon	Nylon	PES	PES
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm
Part No.	FV03-1	FV03-2	FV07-1	FV07-2
Qty.	pk.100	pk.100	pk.100	pk.100



Pre-slitted PP cap with PTFE/silicone septa

Dimension
Membrane
Pore Size
Part No.
Qty.



32 x 12mm
PTFE
0.20 μ m
FV04-1
pk.100



32 x 12mm
PTFE
0.45 μ m
FV04-2
pk.100



32 x 12mm
PVDF
0.20 μ m
FV05-1
pk.100



32 x 12mm
PVDF
0.45 μ m
FV05-2
pk.100

Dimension
Membrane
Pore Size
Part No.
Qty.



32 x 12mm
RC
0.20 μ m
FV01-1
pk.100



32 x 12mm
RC
0.45 μ m
FV01-2
pk.100

Filtration

High Quality Syringe Filters



Housing	Polypropylene (PP)	Polypropylene (PP)	Polypropylene (PP)
Diameter	25 mm	13 mm	4 mm
Filtration Area	4.08 cm ²	1.09 cm ²	0.125 cm ²
Holdup Volume	<100 µl	<20 µl	<5 µl
Sample Volume	<100 ml	<10 ml	<1 ml
Inlet Connection	Luer Lock Female	Luer Lock Female	Luer Lock Female
Outlet Connection	Luer Tip Male	Luer Tip Male	Luer Tip Male
Max. Operating Pressure	6 bar (87 psi)	6 bar (87 psi)	6 bar (87 psi)

Membrane

Nylon

(Polyamide)

Part No.	Diameter	Pore Size	Qty.
SF2503-1	25 mm	0.22 µm	pk.100
SF2503-2	25 mm	0.45 µm	pk.100
SF2503-3	25 mm	1.00 µm	pk.100
SF2503-4	25 mm	5.00 µm	pk.100
SF1303-1	13 mm	0.22 µm	pk.100
SF1303-2	13 mm	0.45 µm	pk.100
SF1303-3	13 mm	1.00 µm	pk.100
SF1303-4	13 mm	5.00 µm	pk.100
SF0403-1	4 mm	0.22 µm	pk.200
SF0403-2	4 mm	0.45 µm	pk.200

Nylon + GF

(Polyamide with
1.00 µm Glass Fiber Prefilter)

SF2503-1G	25 mm	0.22 µm	pk.100
SF2503-2G	25 mm	0.45 µm	pk.100
SF1303-1G	13 mm	0.22 µm	pk.100
SF1303-2G	13 mm	0.45 µm	pk.100

PTFE – Hydrophobic

(Polytetrafluoroethylene)

SF2504-1	25 mm	0.22 µm	pk.100
SF2504-2	25 mm	0.45 µm	pk.100
SF2504-3	25 mm	1.00 µm	pk.100
SF2504-4	25 mm	5.00 µm	pk.100
SF1304-1	13 mm	0.22 µm	pk.100
SF1304-2	13 mm	0.45 µm	pk.100
SF1304-3	13 mm	1.00 µm	pk.100
SF1304-4	13 mm	5.00 µm	pk.100
SF0404-1	4 mm	0.22 µm	pk.200
SF0404-2	4 mm	0.45 µm	pk.200

PTFE – Hydrophobic + GF

(Polytetrafluoroethylene with
1.00 µm Glass Fiber Prefilter)

SF2504-1G	25 mm	0.22 µm	pk.100
SF2504-2G	25 mm	0.45 µm	pk.100
SF1304-1G	13 mm	0.22 µm	pk.100
SF1304-2G	13 mm	0.45 µm	pk.100

PTFE – Hydrophilic

(Polytetrafluoroethylene)

SF2509-1	25 mm	0.22 µm	pk.100
SF2509-2	25 mm	0.45 µm	pk.100
SF1309-1	13 mm	0.22 µm	pk.100
SF1309-2	13 mm	0.45 µm	pk.100
SF0409-1	4 mm	0.22 µm	pk.200
SF0409-2	4 mm	0.45 µm	pk.200

Membrane Chemical Compatibility Chart

https://www.bgb-info.com/files/Filter_Comp_Chart.pdf

Membrane	Part No.	Diameter	Pore Size	Qty.
PP (Polypropylene)	SF2506-1	25 mm	0.22 µm	pk.100
	SF2506-2	25 mm	0.45 µm	pk.100
	SF1306-1	13 mm	0.22 µm	pk.100
	SF1306-2	13 mm	0.45 µm	pk.100
PP +GF (Polypropylene with 1.00 µm Glass Fiber Prefilter)	SF2506-1G	25 mm	0.22 µm	pk.100
	SF2506-2G	25 mm	0.45 µm	pk.100
	SF1306-1G	13 mm	0.22 µm	pk.100
	SF1306-2G	13 mm	0.45 µm	pk.100
PVDF (Polyvinylidene difluoride)	SF2505-1	25 mm	0.22 µm	pk.100
	SF2505-2	25 mm	0.45 µm	pk.100
	SF1305-1	13 mm	0.22 µm	pk.100
	SF1305-2	13 mm	0.45 µm	pk.100
	SF0405-1	4mm	0.22 µm	pk.200
	SF0405-2	4mm	0.45 µm	pk.200
PVDF + GF (Polyvinylidene difluoride with 1.00 µm Glass Fiber Prefilter)	SF2505-1G	25 mm	0.22 µm	pk.100
	SF2505-2G	25 mm	0.45 µm	pk.100
	SF1305-1G	13 mm	0.22 µm	pk.100
	SF1305-2G	13 mm	0.45 µm	pk.100
PES (Polyethersulfone)	SF2507-1	25 mm	0.22 µm	pk.100
	SF2507-2	25 mm	0.45 µm	pk.100
	SF1307-1	13 mm	0.22 µm	pk.100
	SF1307-2	13 mm	0.45 µm	pk.100
	SF0407-1	4mm	0.22 µm	pk.200
	SF0407-2	4mm	0.45 µm	pk.200
PES + GF (Polyethersulfone with 1.00 µm Glass Fiber Prefilter)	SF2507-1G	25 mm	0.22 µm	pk.100
	SF2507-2G	25 mm	0.45 µm	pk.100
	SF1307-1G	13 mm	0.22 µm	pk.100
	SF1307-2G	13 mm	0.45 µm	pk.100
CME (Cellulose Mixed Esters)	SF2501-1ME	25 mm	0.22 µm	pk.100
	SF2501-2ME	25 mm	0.45 µm	pk.100
	SF1301-1ME	13 mm	0.22 µm	pk.100
	SF1301-2ME	13 mm	0.45 µm	pk.100
CME + GF (Cellulose Mixed Esters with 1.00 µm Glass Fiber Prefilter)	SF2501-1MEG	25 mm	0.22 µm	pk.100
	SF2501-2MEG	25 mm	0.45 µm	pk.100
	SF1301-1MEG	13 mm	0.22 µm	pk.100
	SF1301-2MEG	13 mm	0.45 µm	pk.100
CA (Cellulose Acetate)	SF2502-1	25 mm	0.22 µm	pk.100
	SF2502-2	25 mm	0.45 µm	pk.100
	SF1302-1	13 mm	0.22 µm	pk.100
	SF1302-2	13 mm	0.45 µm	pk.100
	SF0402-1	4mm	0.22 µm	pk.200
	SF0402-2	4mm	0.45 µm	pk.200
GF (Glass Fiber)	SF2500-07	25 mm	0.70 µm	pk.100
	SF2500-10	25 mm	1.00 µm	pk.100
	SF1300-07	13 mm	0.70 µm	pk.100
	SF1300-10	13 mm	1.00 µm	pk.100



HPLC Certified Plastic Disposable Syringes
see page 57

			
Housing	Polypropylene (PP)	Polypropylene (PP)	Polypropylene (PP)
Diameter	30 mm	25 mm	17 mm
Filtration Area	4.91 cm ²	3.7 cm ²	1.33 cm ²
Holdup Volume	<137 µl	<100 µl	<29 µl
Sample Volume	<100 ml	<100 ml	<10 ml
Inlet Connection	Luer Lock Female	Luer Lock Female	Luer Lock Female
Outlet Connection	Luer Tip Male	Luer Tip Male	Luer Tip Male
Max. Operating Pressure	6.2 bar (90 psi)	5 bar (72 psi)	7.9 bar (115 psi)

30 mm

				
Color	blue	yellow	grey	brown
Membrane	PTFE/ Glass Fiber Prefilter	PTFE/ Glass Fiber Prefilter	Regenerated Cellulose (RC)/ Glass Fiber Prefilter	Regenerated Cellulose (RC)/ Glass Fiber Prefilter
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm
Miscellaneous	Hydrophobic	Hydrophobic	Hydrophilic	Hydrophilic
Part No.	30162086	30162087	30162088	30162089
Qty.	pk.100	pk.100	pk.100	pk.100

30 mm

					
Color	purple	green	black	red	orange
Membrane	Nylon (PA)/ Glass Fiber Prefilter	Nylon (PA)/ Glass Fiber Prefilter	PVDF/ Glass Fiber Prefilter	PVDF	Glass Fiber
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm	1.2 µm
Miscellaneous	Hydrophilic	Hydrophilic	Hydrophilic	Hydrophilic	Hydrophilic
Part No.	30162090	30162091	30162092	30162093	30162094
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100

25 mm

						
Color	green	natural	blue	yellow	bright blue	bright green
Membrane	PTFE	PTFE	reg. Cellulose (RC)	reg. Cellulose (RC)	Nylon (PA)	Nylon (PA)
Pore Size	0.20 µm	0.45 µm	0.20 µm	0.45 µm	0.20 µm	0.45 µm
Miscellaneous	Hydrophobic	Hydrophobic	Hydrophilic	Hydrophilic	Hydrophilic	Hydrophilic
Part No.	25160346	25160347	25160348	25160349	25160350	25160351
Qty.	pk.100	pk.100	pk.100	pk.100	pk.100	pk.100

17 mm

Color
Membrane
Pore Size
Miscellaneous

Part No.
Qty.



blue
PTFE
0.20 µm
Hydrophobic
17162076
pk.100



yellow
PTFE
0.45 µm
Hydrophobic
17162077
pk.100



grey
Regenerated Cellulose (RC)
0.20 µm
Hydrophilic
17162078
pk.100



brown
Regenerated Cellulose (RC)
0.45 µm
Hydrophilic
17162079
pk.100

17 mm

Color
Membrane
Pore Size
Miscellaneous

Part No.
Qty.



purple
Nylon (PA)
0.20 µm
Hydrophilic
17162080
pk.100



green
Nylon (PA)
0.45 µm
Hydrophilic
17162081
pk.100



black
PVDF/Glass Fiber Prefilter
0.20 µm
Hydrophilic
17162082
pk.100



red
PVDF/Glass Fiber Prefilter
0.45 µm
Hydrophilic
17162083
pk.100

Disposable Plastic Syringes

Polypropylene (PP), HPLC Certified

with
Luer Tip

Volume
Connector

Part No.
Qty.



2 ml
Luer Tip
PP-EWS-2L
pk.100



5 ml
Luer Tip
PP-EWS-5L
pk.100



10 ml
Luer Tip
PP-EWS-10L
pk.100



20 ml
Luer Tip
PP-EWS-20L
pk.100

with
Luer Lock

Volume
Connector

Part No.
Qty.



2 ml
Luer Lock Tip
PP-EWS-2LL
pk.100



5 ml
Luer Lock Tip
PP-EWS-5LL
pk.100



10 ml
Luer Lock Tip
PP-EWS-10LL
pk.100



20 ml
Luer Lock Tip
PP-EWS-20LL
pk.100

Spin Filters

Maxi Spin Filter, non sterile
25 ml capacity, with 50 ml receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFMAXCA02	CA	0.20 µm	pk.50
SPFMAXCA45	CA	0.45 µm	pk.50
SPFMAXNC02	NC	0.20 µm	pk.50
SPFMAXNC45	NC	0.45 µm	pk.50
SPFMAXNL02	Nylon	0.20 µm	pk.50
SPFMAXNL45	Nylon	0.45 µm	pk.50
SPFMAXPS02	PES	0.20 µm	pk.50
SPFMAXPS45	PES	0.45 µm	pk.50
SPFMAXPP02	PP	0.20 µm	pk.50
SPFMAXPP45	PP	0.45 µm	pk.50
SPFMAXPT02	PTFE	0.20 µm	pk.50
SPFMAXPT45	PTFE	0.45 µm	pk.50
SPFMAXPV02	PVDF	0.20 µm	pk.50
SPFMAXPV45	PVDF	0.45 µm	pk.50
SPFMAXRC02	RC	0.20 µm	pk.50
SPFMAXRC45	RC	0.45 µm	pk.50

Midi Spin Filter, non sterile
4 ml capacity, with 7 ml receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFMIDCA02	CA	0.20 µm	pk.25
SPFMIDCA45	CA	0.45 µm	pk.25
SPFMIDNC02	NC	0.20 µm	pk.25
SPFMIDNC45	NC	0.45 µm	pk.25
SPFMIDNL02	Nylon	0.20 µm	pk.25
SPFMIDNL45	Nylon	0.45 µm	pk.25
SPFMIDPS02	PES	0.20 µm	pk.25
SPFMIDPS45	PES	0.45 µm	pk.25
SPFMIDPP02	PP	0.20 µm	pk.25
SPFMIDPP45	PP	0.45 µm	pk.25
SPFMIDPT02	PTFE	0.20 µm	pk.25
SPFMIDPT45	PTFE	0.45 µm	pk.25
SPFMIDPV02	PVDF	0.20 µm	pk.25
SPFMIDPV45	PVDF	0.45 µm	pk.25
SPFMIDRC02	RC	0.20 µm	pk.25
SPFMIDRC45	RC	0.45 µm	pk.25

Micro Spin Filter, non sterile
800 µl capacity, with 2.0 ml receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFMICCA02	CA	0.20 µm	pk.100
SPFMICCA45	CA	0.45 µm	pk.100
SPFMICNC02	NC	0.20 µm	pk.100
SPFMICNC45	NC	0.45 µm	pk.100
SPFMICNL02	Nylon	0.20 µm	pk.100
SPFMICNL45	Nylon	0.45 µm	pk.100
SPFMICPS02	PES	0.20 µm	pk.100
SPFMICPS45	PES	0.45 µm	pk.100
SPFMICPP02	PP	0.20 µm	pk.100
SPFMICPP45	PP	0.45 µm	pk.100
SPFMICPT02	PTFE	0.20 µm	pk.100
SPFMICPT45	PTFE	0.45 µm	pk.100
SPFMICPV02	PVDF	0.20 µm	pk.100
SPFMICPV45	PVDF	0.45 µm	pk.100
SPFMICRC02	RC	0.20 µm	pk.100
SPFMICRC45	RC	0.45 µm	pk.100

Nano Spin Filter, non sterile
400 µl capacity, with 2.0 ml capples receiver tube



Part No.	Membrane	Pore Size	Qty.
SPFNANCA02	CA	0.20 µm	pk.100
SPFNANCA45	CA	0.45 µm	pk.100
SPFNANNC02	NC	0.20 µm	pk.100
SPFNANNC45	NC	0.45 µm	pk.100
SPFNANNL02	Nylon	0.20 µm	pk.100
SPFNANNL45	Nylon	0.45 µm	pk.100
SPFNANPS02	PES	0.20 µm	pk.100
SPFNANPS45	PES	0.45 µm	pk.100
SPFNANPP02	PP	0.20 µm	pk.100
SPFNANPP45	PP	0.45 µm	pk.100
SPFNANPT02	PTFE	0.20 µm	pk.100
SPFNANPT45	PTFE	0.45 µm	pk.100
SPFNANPV02	PVDF	0.20 µm	pk.100
SPFNANPV45	PVDF	0.45 µm	pk.100
SPFNANRC02	RC	0.20 µm	pk.100
SPFNANRC45	RC	0.45 µm	pk.100

Well Filter Plates

96 Well Filter Plate, non sterile
850µL capacity



Part No.	Membrane	Pore Size	Qty.
WFPCA02	CA	0.20 µm	ea.
WFPCA45	CA	0.45 µm	ea.
WFPNC02	NC	0.20 µm	ea.
WFPNC45	NC	0.45 µm	ea.
WFPNL02	Nylon	0.20 µm	ea.
WFPNL45	Nylon	0.45 µm	ea.
WFPPS02	PES	0.20 µm	ea.
WFPPS45	PES	0.45 µm	ea.
WFPPP02	PP	0.20 µm	ea.
WFPPP45	PP	0.45 µm	ea.
WFPPT02	PTFE	0.20 µm	ea.
WFPPT45	PTFE	0.45 µm	ea.
WFPPV02	PVDF	0.20 µm	ea.
WFPPV45	PVDF	0.45 µm	ea.
WFPRC02	RC	0.20 µm	ea.
WFPRC45	RC	0.45 µm	ea.



Syringe Filters
see page 54



Spin Filters
see page 58

PEEK Tubing «Premium Grade»

- 1/32", 1/16", 1/8" and 1/4" OD tubing available
- Premium grade tubing with tighter tolerances
- Biocompatible
- Easy to cut

PEEK Tubing has the strength required to withstand continuous use at HPLC pressure without swelling or bursting. The dense polymer structure of our PEEK tubing eliminates the permeability to organic solvents that causes other polymer tubing, such as ETFE to «sweat».

Remember PEEK tubing is not affected by halide salts, high strength buffers or other aggressive mobile phases that corrode stainless steel. The polymer surface will not leach metal ions into the eluent or extract metal sensitive components from the sample. By far the most outstanding property is its excellent burst pressure.

Due to the tighter tolerances, BGB PEEK tubing is the best choice for chromatography applications in which exact flow rates or tube volume are of importance. The tighter tolerance ensures a more consistent internal volume of the transfer lines.

PEEK Tubing – Solid Color-Coded – 1/16" OD



Part No.	OD	ID	Color	Pressure	Minimum Order (m)
211690	1/16"	0.050 mm	orange	483 bar	5 m
211691	1/16"	0.075 mm	purple	483 bar	5 m
211692	1/16"	0.10 mm	black	483 bar	5 m
211693	1/16"	0.13 mm	red	483 bar	5 m
211694	1/16"	0.18 mm	yellow	483 bar	5 m
211695	1/16"	0.25 mm	blue	483 bar	5 m
211696	1/16"	0.50 mm	orange	414 bar	5 m
211697	1/16"	0.75 mm	natural	276 bar	5 m
211698	1/16"	1.00 mm	black	207 bar	5 m

Maximum recommended working temperature 100 °C (continuous) for 1/16" OD tubing with ID up to 0.75 mm.

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/16" *	0.025	0.013
1/16" **	0.025	0.025

* for ID up to 0.10 mm

** for ID over 0.10 mm

PEEK Tubing – Striped Color-Coded – 1/32" OD



Part No.	OD	ID	Color	Pressure	Qty.
211630-3	1/32"	0.050 mm	orange	455 bar	3 m
211631-3	1/32"	0.064 mm	pink	455 bar	3 m
211632-3	1/32"	0.075 mm	green	455 bar	3 m
211633-3	1/32"	0.10 mm	black	455 bar	3 m
211634-3	1/32"	0.13 mm	red	414 bar	3 m
211635-3	1/32"	0.15 mm	natural	400 bar	3 m
211636-3	1/32"	0.18 mm	yellow	386 bar	3 m
211637-3	1/32"	0.25 mm	blue	338 bar	3 m
211638-3	1/32"	0.50 mm	orange	207 bar	3 m

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/32"	0.025	0.013

Polymeric Tubing Chemical Compatibility Chart

www.bgb-shop.com/files/polymeric-tubing-chemical-resistance.pdf



Polymeric Tubing Cutter

see page 63

PEEK Tubing – Striped Color-Coded – 1/16" OD



Part No.	OD	ID	Color	Pressure	Qty.
211600-3	1/16"	0.050 mm	orange	480 bar	3 m
211600-5	1/16"	0.050 mm	orange	480 bar	5 m
211600-10	1/16"	0.050 mm	orange	480 bar	10 m
211600-25	1/16"	0.050 mm	orange	480 bar	25 m
211602-3	1/16"	0.075 mm	green	470 bar	3 m
211602-5	1/16"	0.075 mm	green	470 bar	5 m
211602-10	1/16"	0.075 mm	green	470 bar	10 m
211602-25	1/16"	0.075 mm	green	470 bar	25 m
211603-3	1/16"	0.10 mm	black	460 bar	3 m
211603-5	1/16"	0.10 mm	black	460 bar	5 m
211603-10	1/16"	0.10 mm	black	460 bar	10 m
211603-25	1/16"	0.10 mm	black	460 bar	25 m
211604-3	1/16"	0.13 mm	red	460 bar	3 m
211604-5	1/16"	0.13 mm	red	460 bar	5 m
211604-10	1/16"	0.13 mm	red	460 bar	10 m
211604-25	1/16"	0.13 mm	red	460 bar	25 m
211605-3	1/16"	0.18 mm	yellow	440 bar	3 m
211605-5	1/16"	0.18 mm	yellow	440 bar	5 m
211605-10	1/16"	0.18 mm	yellow	440 bar	10 m
211605-25	1/16"	0.18 mm	yellow	440 bar	25 m
211606-3	1/16"	0.25 mm	blue	420 bar	3 m
211606-5	1/16"	0.25 mm	blue	420 bar	5 m
211606-10	1/16"	0.25 mm	blue	420 bar	10 m
211606-25	1/16"	0.25 mm	blue	420 bar	25 m
211607-3	1/16"	0.50 mm	orange	345 bar	3 m
211607-5	1/16"	0.50 mm	orange	345 bar	5 m
211607-10	1/16"	0.50 mm	orange	345 bar	10 m
211607-25	1/16"	0.50 mm	orange	345 bar	25 m
211608-3	1/16"	0.75 mm	green	262 bar	3 m
211608-5	1/16"	0.75 mm	green	262 bar	5 m
211608-10	1/16"	0.75 mm	green	262 bar	10 m
211608-25	1/16"	0.75 mm	green	262 bar	25 m
211609-3	1/16"	1.00 mm	grey	179 bar	3 m
211609-5	1/16"	1.00 mm	grey	179 bar	5 m
211609-10	1/16"	1.00 mm	grey	179 bar	10 m
211609-25	1/16"	1.00 mm	grey	179 bar	25 m
211610-3	1/16"	1.40 mm	black	55 bar	3 m
211610-5	1/16"	1.40 mm	black	55 bar	5 m
211610-10	1/16"	1.40 mm	black	55 bar	10 m
211610-25	1/16"	1.40 mm	black	55 bar	25 m

Maximum recommended working temperature 100 °C (continuous) for 1/16" OD tubing with ID up to 0.75 mm.

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/16" *	0.025	0.013
1/16" **	0.025	0.025

* for ID up to 0.25 mm

** for ID over 0.25 mm



Fittings & Ferrules

see page 70


www.bgb-shop.com/hplc-accessories

Polymeric Tubing Chemical Compatibility Chart

www.bgb-shop.com/files/polymeric-tubing-chemical-resistance.pdf

PEEK Tubing «Premium Grade»

PEEK Tubing – Natural – 1/8" & 1/4" OD



Part No.	OD	ID	Color	Pressure	Qty.
211682-3	1/8"	0.75 mm	natural	345 bar	3 m
211682-10	1/8"	0.75 mm	natural	345 bar	10 m
211681-3	1/8"	1.59 mm	natural	224 bar	3 m
211681-10	1/8"	1.59 mm	natural	224 bar	10 m
211683-3	1/8"	2.00 mm	natural	165 bar	3 m
211683-10	1/8"	2.00 mm	natural	165 bar	10 m
211684-1	1/4"	3.17 mm	natural	227 bar	1 m

Maximum recommended working temperature 100 °C (continuous) for 1/16" OD tubing with ID up to 0.75 mm.

PEEK Tubing tolerances

Tubing OD	OD ± mm	ID ± mm
1/8"	0.075	0.075
1/4"	0.100	0.100

Polymeric Tubing Cutter

The Polymeric Tubing Cutter makes burr-free perpendicular cuts to PEEK, PTFE, ETFE, FEP, PFA and other polymeric tubing without distorting the OD or ID. For tubing OD 1/16", 1/8", 2 mm, 3 mm and 4 mm.

Description



Polymeric Tubing Cutter

Part No.

220387

Qty.

ea.



Replacement Blade for Polymeric Tubing Cutter

220388

ea.

Metall Tubing Cutter

The Metall Tubing Cutter is the ideal way to cut 1/16" and 1/8" OD tubing, leaving smooth cuts requiring a minimum of deburring.

Description



Metall Tubing Cutter

Part No.

220389

Qty.

ea.



Replacement Cutting Wheel for Metall Tubing Cutter

220390

ea.



SETonic PEEK Tubing Connector Syringes

www.bgb-shop.com/setonic-threaded

Polymeric Tubing

- For low and mid pressure applications
- Biocompatible
- Easy to cut

FEP Tubing

FEP (Fluorinated Ethylenepropylene) is chemically inert to most HPLC solvents and is recommended for low pressure applications. We recommend FEP for ion chromatography applications. Max. operating temperature for FEP is 80 °C.


ETFE Tubing

ETFE (Etyhltrifluoroethylene) tubing has some outstanding properties which makes it particularly suitable for HPLC since it has a higher burst pressure when compared to PTFE. It is important to note that when using ETFE with organic solvents it may swell and will reduce the max. pressure to 70 bar. It is the ideal polymer for applications with chloride salts, which typically corrode stainless steel.

PTFE Tubing

PTFE (Polytetrafluoroethylene) tubing is chemically inert and suitable for lower pressure applications. Maximum continuous operating temperature is 100 °C.

For more Polymeric Tubing materials and other diameters visit www.bgb-shop.com/polymeric-tubing
Our online filter guide will help you to find the right tubing.



FEP Tubing – Natural – 1/8" OD

Part No.	OD	ID	Color	Max Pressure	Qty.
211540-3	1/8"	1.59 mm	natural	69 bar	3 m
211540-10	1/8"	1.59 mm	natural	69 bar	10 m
211540-25	1/8"	1.59 mm	natural	69 bar	25 m
211541-3	1/8"	2.10 mm	natural	41 bar	3 m
211541-10	1/8"	2.10 mm	natural	41 bar	10 m
211541-25	1/8"	2.10 mm	natural	41 bar	25 m

Maximum recommended working temperature
for FEP Tubing
80 °C (continuous)
for ETFE Tubing
80 °C (continuous)
for PTFE Tubing
100 °C (continuous).

Tubing tolerances		
Tubing OD	OD ± mm	ID ± mm
1/8"	0.10	0.10

ETFE Tubing – Natural – 1/8" OD

Part No.	OD	ID	Color	Max Pressure	Qty.
211906-3	1/8"	1.59 mm	natural	110 bar	3 m
211906-10	1/8"	1.59 mm	natural	110 bar	10 m
211906-25	1/8"	1.59 mm	natural	110 bar	25 m

PTFE Tubing – Natural – 1/8" OD


Part No.	OD	ID	Color	Max Pressure	Qty.
211925-3	1/8"	1.59 mm	natural	35 bar	3 m
211925-5	1/8"	1.59 mm	natural	35 bar	5 m
211925-10	1/8"	1.59 mm	natural	35 bar	10 m
211925-25	1/8"	1.59 mm	natural	35 bar	25 m
211926-3	1/8"	2.40 mm	natural	18 bar	3 m
211926-5	1/8"	2.40 mm	natural	18 bar	5 m
211926-10	1/8"	2.40 mm	natural	18 bar	10 m
211926-25	1/8"	2.40 mm	natural	18 bar	25 m



Polymeric Tubing Cutter
see page 63

Stainless Steel Tubing «Premium Grade»

- Premium Grade Stainless Steel Type 316 – Seamless
- Variety of sizes for UHPLC, HPLC and GC applications
- Smooth internal surface
- Soft annealed OD for easy ferrule connections



Stainless Steel Tubing – Premium Grade – 1/32" OD

Part No.	OD	ID	Max Pressure	Qty.
211700-3	1/32"	0.13 mm	1735 bar	3 m
211700-10	1/32"	0.13 mm	1735 bar	10 m
211701-3	1/32"	0.18 mm	1600 bar	3 m
211701-10	1/32"	0.18 mm	1600 bar	10 m
211702-3	1/32"	0.25 mm	1395 bar	3 m
211702-10	1/32"	0.25 mm	1395 bar	10 m
211703-3	1/32"	0.50 mm	734 bar	3 m
211703-10	1/32"	0.50 mm	734 bar	10 m

Stainless Steel Tubing
«Premium Grade» tolerances

Tubing OD	OD ± mm	ID ± mm
1/32"	0.05	0.025
1/16"	0.05	0.025
1/8"	0.05	0.025

Stainless Steel Tubing – Premium Grade – 1/16" OD

Part No.	OD	ID	Max Pressure	Qty.
211710-3	1/16"	0.13 mm	1900 bar	3 m
211710-10	1/16"	0.13 mm	1900 bar	10 m
211711-3	1/16"	0.25 mm	1735 bar	3 m
211711-10	1/16"	0.25 mm	1735 bar	10 m
211712-3	1/16"	0.38 mm	1395 bar	3 m
211712-10	1/16"	0.38 mm	1395 bar	10 m
211713-3	1/16"	0.50 mm	1395 bar	3 m
211713-10	1/16"	0.50 mm	1395 bar	10 m
211714-3	1/16"	0.75 mm	1065 bar	3 m
211714-10	1/16"	0.75 mm	1065 bar	10 m
211715-3	1/16"	1.00 mm	734 bar	3 m
211715-10	1/16"	1.00 mm	734 bar	10 m

Stainless Steel Tubing – Premium Grade – 1/8" OD


Part No.	OD	ID	Max Pressure	Qty.
211720-3	1/8"	0.75 mm	1570 bar	3 m
211720-10	1/8"	0.75 mm	1570 bar	10 m
211721-3	1/8"	1.00 mm	1400 bar	3 m
211721-10	1/8"	1.00 mm	1400 bar	10 m
211722-3	1/8"	1.52 mm	1075 bar	3 m
211722-10	1/8"	1.52 mm	1075 bar	10 m
211723-3	1/8"	1.78 mm	950 bar	3 m
211723-10	1/8"	1.78 mm	950 bar	10 m
211724-3	1/8"	2.16 mm	660 bar	3 m
211724-10	1/8"	2.16 mm	660 bar	10 m



Metall Tubing Cutter
see page 63

Stainless Steel Tubing «Standard»

- Variety of sizes for UHPLC, HPLC and GC applications
- Smooth internal surface
- Soft annealed OD for easy ferrule connections
- Stainless Steel Type 316



Stainless Steel Tubing – Standard Grade – 1/16" OD

Part No.	OD	ID	Max Pressure	Qty.
211730-3	1/16"	0.13 mm	1870 bar	3 m
211730-10	1/16"	0.13 mm	1870 bar	10 m
211731-3	1/16"	0.18 mm	1790 bar	3 m
211731-10	1/16"	0.18 mm	1790 bar	10 m
211732-3	1/16"	0.25 mm	1715 bar	3 m
211732-10	1/16"	0.25 mm	1715 bar	10 m
211733-3	1/16"	0.50 mm	1380 bar	3 m
211733-10	1/16"	0.50 mm	1380 bar	10 m
211734-3	1/16"	0.75 mm	1075 bar	3 m
211734-10	1/16"	0.75 mm	1075 bar	10 m
211735-3	1/16"	1.00 mm	743 bar	3 m
211735-10	1/16"	1.00 mm	743 bar	10 m

Stainless Steel Tubing «Standard» tolerances

Tubing OD	OD ± mm	ID ± mm
1/16"	0.05	0.05
1/8"	0.05	0.05
1/4"	0.05	0.05

Stainless Steel Tubing – Standard Grade – 1/8" OD


Part No.	OD	ID	Max Pressure	Qty.
211740-3	1/8"	2.10 mm	680 bar	3 m
211740-10	1/8"	2.10 mm	680 bar	10 m

Stainless Steel Tubing – Standard Grade – 1/4" OD

Part No.	OD	ID	Max Pressure	Qty.
211750-1	1/4"	4.65 mm	538 bar	1 m

Copper Tubing «Pre-Cleaned»

- Recommended for carrier gas lines
- Tubing is cleaned by solvent rinse
- Baked under inert gas flow



Copper Tubing tolerances

Tubing OD	OD ± mm	Wall ± mm
1/8"	0.051	0.076
1/4"	0.051	0.064

Part No.	OD	ID	Max Pressure	Qty.
211760	1/8"	1.65 mm (0.065")	193 bar	15.24 m (50 ft)
211761	1/4"	4.83 mm (0.190")	69 bar	15.24 m (50 ft)

Swagelok® Fittings and Unions

Fittings Brass

BGB carries a full line of quality Swagelok fittings, unions and connectors.



Part No.	Description	Qty.
SW-B-102-1	1/16" Nut	10
SW-B-202-1	1/8" Nut	10
SW-B-402-1	1/4" Nut	10



Part No.	Description	Qty.
SW-B-103-1	1/16" Front Ferrule	10
SW-B-203-1	1/8" Front Ferrule	10
SW-B-403-1	1/4" Front Ferrule	10



Part No.	Description	Qty.
SW-B-104-1	1/16" Back Ferrule	10
SW-B-204-1	1/8" Back Ferrule	10
SW-B-404-1	1/4" Back Ferrule	10



Part No.	Description	Qty.
SW-B-100-C	1/16" Cap	5
SW-B-200-C	1/8" Cap	5
SW-B-400-C	1/4" Cap	5



Part No.	Description	Qty.
SW-B-100-P	1/16" Plug	5
SW-B-200-P	1/8" Plug	5
SW-B-400-P	1/4" Plug	5



Part No.	Description	Qty.
SW-B-100-6	Union 1/16" to 1/16"	ea.
SW-B-200-6	Union 1/8" to 1/8"	ea.
SW-B-400-6	Union 1/4" to 1/4"	ea.



Part No.	Description	Qty.
SW-B-200-6-1	Reducing Union 1/8" to 1/16"	ea.
SW-B-400-6-1	Reducing Union 1/4" to 1/16"	ea.
SW-B-400-6-2	Reducing Union 1/4" to 1/8"	ea.



Part No.	Description	Qty.
SW-B-100-3	Union Tees 1/16" x 1/16" x 1/16"	ea.
SW-B-200-3	Union Tees 1/8" x 1/8" x 1/8"	ea.
SW-B-400-3	Union Tees 1/4" x 1/4" x 1/4"	ea.



Part No.	Description	Qty.
SW-B-100-6BT	Bored Through Unions 1/16" to 1/16"	ea.
SW-B-200-6BT	Bored Through Unions 1/8" to 1/8"	ea.
SW-B-400-6BT	Bored Through Unions 1/4" to 1/4"	ea.



Part No.	Description	Qty.
SW-B-100-1-1	Male Connector 1/16" to 1/16" NPT	ea.
SW-B-200-1-2	Male Connector 1/8" to 1/8" NPT	ea.
SW-B-400-1-4	Male Connector 1/4" to 1/4" NPT	ea.
SW-B-100-1-2	Male Connector 1/16" to 1/8" NPT	ea.
SW-B-200-1-1	Male Connector 1/8" to 1/16" NPT	ea.
SW-B-400-1-2	Male Connector 1/4" to 1/8" NPT	ea.
SW-B-200-1-4	Male Connector 1/8" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-B-200-7-2	Female Connector 1/8" to 1/8" NPT	ea.
SW-B-200-7-4	Female Connector 1/8" to 1/4" NPT	ea.
SW-B-400-7-2	Female Connector 1/4" to 1/8" NPT	ea.
SW-B-400-7-4	Female Connector 1/4" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-B-100-R-2	Reducers 1/16" to 1/8" Tube	ea.
SW-B-200-R-2	Reducers 1/8" to 1/8" Tube	ea.
SW-B-400-R-2	Reducers 1/4" to 1/8" Tube	ea.

Fittings Stainless Steel

BGB carries a full line of quality Swagelok fittings, unions and connectors.



Part No.	Description	Qty.
SW-SS-102-1	1/16" Nut	10
SW-SS-202-1	1/8" Nut	10
SW-SS-402-1	1/4" Nut	10



Part No.	Description	Qty.
SW-SS-103-1	1/16" Front Ferrule	10
SW-SS-203-1	1/8" Front Ferrule	10
SW-SS-403-1	1/4" Front Ferrule	10



Part No.	Description	Qty.
SW-SS-104-1	1/16" Back Ferrule	10
SW-SS-204-1	1/8" Back Ferrule	10
SW-SS-404-1	1/4" Back Ferrule	10



Part No.	Description	Qty.
SW-SS-100-C	1/16" Cap	5
SW-SS-200-C	1/8" Cap	5
SW-SS-400-C	1/4" Cap	5



Part No.	Description	Qty.
SW-SS-100-P	1/16" Plug	5
SW-SS-200-P	1/8" Plug	5
SW-SS-400-P	1/4" Plug	5



Part No.	Description	Qty.
SW-SS-100-6	Union 1/16" to 1/16" ea.	
SW-SS-200-6	Union 1/8" to 1/8" ea.	
SW-SS-400-6	Union 1/4" to 1/4" ea.	



Part No.	Description	Qty.
SW-SS-200-6-1	Reducing Union 1/8" to 1/16"	ea.
SW-SS-400-6-1	Reducing Union 1/4" to 1/16"	ea.
SW-SS-400-6-2	Reducing Union 1/4" to 1/8"	ea.



Part No.	Description	Qty.
SW-SS-100-3	Union Tees 1/16" x 1/16" x 1/16"	ea.
SW-SS-200-3	Union Tees 1/8" x 1/8" x 1/8"	ea.
SW-SS-400-3	Union Tees 1/4" x 1/4" x 1/4"	ea.



Part No.	Description	Qty.
SW-SS-100-6BT	Bored Through Unions 1/16" to 1/16" ea.	
SW-SS-200-6BT	Bored Through Unions 1/8" to 1/8" ea.	
SW-SS-400-6BT	Bored Through Unions 1/4" to 1/4" ea.	



Part No.	Description	Qty.
SW-SS-100-1-1	Male Connector 1/16" to 1/16" NPT	ea.
SW-SS-200-1-2	Male Connector 1/8" to 1/8" NPT	ea.
SW-SS-400-1-4	Male Connector 1/4" to 1/4" NPT	ea.
SW-SS-100-1-2	Male Connector 1/16" to 1/8" NPT	ea.
SW-SS-200-1-1	Male Connector 1/8" to 1/16" NPT	ea.
SW-SS-400-1-2	Male Connector 1/4" to 1/8" NPT	ea.
SW-SS-200-1-4	Male Connector 1/8" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-SS-200-7-2	Female Connector 1/8" to 1/8" NPT	ea.
SW-SS-200-7-4	Female Connector 1/8" to 1/4" NPT	ea.
SW-SS-400-7-2	Female Connector 1/4" to 1/8" NPT	ea.
SW-SS-400-7-4	Female Connector 1/4" to 1/4" NPT	ea.



Part No.	Description	Qty.
SW-SS-100-R-2	Reducers 1/16" to 1/8" Tube	ea.
SW-SS-200-R-2	Reducers 1/8" to 1/8" Tube	ea.
SW-SS-400-R-2	Reducers 1/4" to 1/8" Tube	ea.

Gas Toggle Valves

- Compact, rugged design
- Opens and closes quickly
- Straight and angle flow patterns

Swagelok® Toggle Valve Brass

Part No.	Description	Qty.
SW-B-OGS2	Toggle Valve, Brass, 1/8", straight	ea.
SW-B-1GS4	Toggle Valve, Brass, 1/4", straight	ea.
SW-B-OGS2-A	Toggle Valve, Brass, 1/8", angled	ea.
SW-B-1GS4-A	Toggle Valve, Brass, 1/4", angled	ea.



Toggle Valve, straight



Toggle Valve, angled

Swagelok® Toggle Valve Stainless Steel

Part No.	Description	Qty.
SW-SS-OGS2	Toggle Valve, SS, 1/8", straight	ea.
SW-SS-1GS4	Toggle Valve, SS, 1/4", straight	ea.
SW-SS-OGS2-A	Toggle Valve, SS, 1/8", angled	ea.
SW-SS-1GS4-A	Toggle Valve, SS, 1/4", angled	ea.

Gas Ball Valves

- Working pressure up to 200 bar
- Temperatures up to 150°C
- Straight and angle flow patterns

Swagelok® Ball Valve Brass

Part No.	Description	Qty.
SW-B-41S2	Ball Valve, Brass, 1/8", straight	ea.
SW-B-43S4	Ball Valve, Brass, 1/4", straight	ea.
SW-B-41S2-A	Ball Valve, Brass, 1/8", angled	ea.
SW-B-43S4-A	Ball Valve, Brass, 1/4", angled	ea.



Ball Valve, straight



Ball Valve, angled

Swagelok® Ball Valve Stainless Steel

Part No.	Description	Qty.
SW-SS-41GS2	Ball Valve, SS, 1/8", straight	ea.
SW-SS-43GS4	Ball Valve, SS, 1/4", straight	ea.
SW-SS-41GS2-A	Ball Valve, SS, 1/8", angled	ea.
SW-SS-43GS4-A	Ball Valve, SS, 1/4", angled	ea.

Hexagon Key Set, 30 pieces (mm & inch)



Metric: 0.7; 0.9; 1.27; 1.5; 2.0; 2.5; 4.0; 4.5; 5.0; 5.5;
6.0; 7.0; 8.0; 10.0 mm
Inch: 0.028; 0.036; 0.05; 1/16; 5/64; 3/32; 7/64; 1/8;
9/64; 5/32; 3/16; 7/32; 1/4; 5/16 and 3/8 inch
Material: Chrome-Vanadium Steel

Part No.	Description	Qty.
IMBUS	Hexagon Key Set (mm & inch), Chrome-Vanadium Steel	ea.

HPLC Adapters, Fittings and Unions

1/16" 10-32 Standard HPLC Fittings for 1/16" OD Tubing

«No-Twist-One-Piece»

Material
Thread
Miscellaneous
Part No.
Qty.



max. 350 bar
PEEK
1/16" 10-32
Hex Head, Short
220366
pk.5



max. 350 bar
PEEK
1/16" 10-32
Hex Head, Standard
220367
pk.5



max. 350 bar
PEEK
1/16" 10-32
Hex Head, Long
220368
pk.5



max. 350 bar
PEEK
1/16" 10-32
Fingertight
220369
pk.5

One-Piece

Material
Thread
Miscellaneous
Part No.
Qty.



max. 345 bar
PEEK
1/16" 10-32
Fingertight, Short
220370
pk.10



max. 345 bar
PEEK
1/16" 10-32
Fingertight, Long
220371
pk.10



max. 345 bar
PEEK
1/16" 10-32
Fingertight
200910
pk.10

Tubing Sleeves – Connecting Fused Silica Tubing into HPLC Ports

Type
Material
Inner Diameter
For OD Tubing
Color
Part No.
Qty.



1/16" OD
FEP
395 µm
340-380 µm
Green
220545
pk.10



1/16" OD
PEEK
405 µm
350-390 µm
Orange
220525
pk.10



1/32" OD
FEP
395 µm
340-380 µm
Green
220565
pk.10



1/32" OD
PEEK
380 µm
325-365 µm
Natural
220574
pk.10

1/16" 10-32 UHPLC Fittings, Ferrules and Nuts for 1/16" OD Tubing

Type					
Material	SS & Ti/PEEK	SS & Ti/PEEK	SS & Ti/PEEK	SS & Ti/PEEK	Ti/PEEK
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" OD Tubing
Miscellaneous	Hex Head, Short	Hex Head, Standard	Hex Head, Long	Fingertight	-
Part No.	220355	220356	220357	220358	220359
Qty.	ea.	ea.	ea.	ea.	pk.2

Type				
Material	SS	SS	SS	SS
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" OD Tubing
Miscellaneous	Hex Head, Short	Hex Head, Standard	Hex Head, Long	Valco Type
Part No.	200952	200953	200954	200955
Qty.	pk.5	pk.5	pk.5	pk.5

One-Piece

Type			
Material	PEEK	PEEK	PEEK
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32
Miscellaneous	Fingertight	Hex Head	Fingertight
Part No.	220364	220365	200910-HP
Qty.	pk.10	pk.10	pk.10



BGB HPLC Columns

www.bgb-shop.com/hplc-columns

1/4"-28 Flangeless Fittings & Ferrules

Type	Nut	Nut	Nut	Ferrule	Ferrule
Material	PEEK	PEEK	POM	ETFE with SS Ring	PEEK with SS Ring
Thread	1/4"-28	1/4"-28	1/4"-28	-	-
Miscellaneous	Fingertight, Short	Fingertight, Long	Fingertight, Long	1/8" OD Tubing	1/8" OD Tubing
Part No.	220344	220345	220346	220347	220348
Qty.	pk.10	pk.10	pk.10	pk.10	pk.10

Type	Nut	Ferrule	Nut	Ferrule
Material	PPS	ETFE	PPS	ETFE
Thread	1/4"-28	-	1/4"-28	-
Miscellaneous	Hex Head	1/8" OD Tubing	Hex Head	1/16" OD Tubing
Part No.	220349	220351	220350	220352
Qty.	pk.10	pk.10	pk.10	pk.10

Type	Fitting	Fitting
Material	PEEK	PEEK
Thread	1/4"-28	1/4"-28
Miscellaneous	«No-Twist-One-Piece» Fingertight	«No-Twist-One-Piece» Fingertight
Part No.	220353	220354
Qty.	ea.	ea.

M6 Fitting & Ferrule for 1/8" OD Tubing

Type	Nut	Ferrule
Material	PEEK	PEEK with SS Ring
Thread	M6 (metric)	1/8" OD Tubing
Part No.	220373	220348
Qty.	pk.5	pk.10

Adapters

Material	PEEK	PEEK	PEEK
Thread	1/16" 10-32 female to 1/4"-28 female	1/16" 10-32 male to 1/4"-28 female	1/16" 10-32 female to M6 female
Bore	0.4 mm	0.4 mm	0.4 mm
Part No.	220312	220300	220317
Qty.	ea.	ea.	ea.



SETonic PEEK Tubing Connector Syringes
www.bgb-shop.com/setonic-threaded

More Adapters, Fittings & Ferrules
www.bgb-shop.com/hplc-accessories

Unions

1/16" 10-32 Thread

Material
Thread
Bore
Part No.
Qty.



max. 350 bar
PEEK
1/16" 10-32
0.25 mm
201950
ea.



max. 350 bar
PEEK
1/16" 10-32
0.50 mm
201951
ea.



max. 1375 bar
SS
1/16" 10-32
0.15 mm
200980
ea.



max. 1375 bar
SS
1/16" 10-32
0.25 mm
200981
ea.



max. 1375 bar
SS
1/16" 10-32
0.50 mm
200982
ea.

1/4" -28 Thread

Material
Thread
Bore
Part No.
Qty.



PEEK
1/4" -28
1/16" OD tubing
0.75 mm
220379
ea.



PEEK
1/4" -28
1/8" OD tubing
1.3 mm
220380
ea.



ETFE
1/4" -28
-
End to End thread
220381
ea.

Reducing Unions

Material
Thread
Bore
Part No.
Qty.



max. 1375 bar
SS
1/16" 10-32 to
1/32" 6-40
0.15 mm
220382
ea.



max. 1375 bar
SS
1/16" 10-32 to
1/8" 5/16"-24
0.75 mm
200984
ea.



max. 350 bar
SS
1/16" 10-32 to
1/4" 7/16"-20
0.75 mm
220384
ea.



Material
Thread
Bore
Part No.
Qty.

max. 350 bar
PEEK
1/16" 10-32 to
360 µm 2-56
0.15 mm
202010
ea.



max. 350 bar
PEEK
1/16" 10-32 to
1/32" 6-40
0.25 mm
220386
ea.



max. 350 bar
PEEK
1/16" 10-32 to
1/8" 5/16"-24
0.75 mm
201970
ea.

Tees

Material
Thread
Bore
Part No.
Qty.



max. 350 bar
PEEK
1/16" 10-32
0.25 mm
201980
ea.



max. 350 bar
PEEK
1/16" 10-32
0.50 mm
201981
ea.



max. 1375 bar
SS
1/16" 10-32
0.25 mm
200985
ea.



max. 1375 bar
SS
1/16" 10-32
0.50 mm
200986
ea.

Adapters for Luer Ports (Syringe Adapters)

Material
Thread

Bore

Part No.
Qty.



PEEK
1/4"-28 female to
Luer Lock female
1.3 mm
220302
ea.



ETFE
1/4"-28 female to
Luer Lock female
1.0 mm
220303
pk.5



PEEK
1/4"-28 female to
Luer Lock male
1.3 mm
220304
ea.



PEEK
1/4"-28 male to
Luer female
1.5 mm
220305
ea.



ETFE
1/4"-28 male to
Luer Lock female
1.3 mm
220306
pk.5

Material
Thread

Bore

Part No.
Qty.



ETFE
1/4"-28 male to
Luer male
1.0 mm
220307
pk.5



PEEK
1/4"-28 male to
Luer Lock male
1.0 mm
220308
ea.



ETFE
1/16" 10-32 female to
Luer Lock female
1.0 mm
220313
pk.5



PEEK
1/16" 10-32 female to
Luer Lock female
1.3 mm
220314
ea.



PEEK
1/16" 10-32 female to
Luer Lock male
1.3 mm
220315
ea.

Material
Thread

Bore

Part No.
Qty.



PEEK
1/16" 10-32 male to
Luer Lock female
1.3 mm
220337
ea.



ETFE
1/16" 10-32 male to
Luer Lock female
1.3 mm
220316
pk.5



SS
1/16" 10-32 male to
Luer female
1.0 mm
220322
ea.



PEEK
M6 female to
Luer Lock female
1.3 mm
220320
ea.



ETFE
M6 male to
Luer Lock female
1.3 mm
220321
pk.5

Material
Thread

Bore
For Tubing

Part No.
Qty.



PP
Luer Lock female
to Barbed
0.76 mm
1/16" ID
220323
pk.10



PP
Luer Lock female
to Barbed
1.4 mm
3/32" ID
220324
pk.10



PP
Luer Lock female
to Barbed
2.0 mm
1/8" ID
220325
pk.10



PP
Luer Lock male
to Barbed
1.24 mm
1/16" ID
220326
pk.10



PP
Luer Lock male
to Barbed
1.8 mm
3/32" ID
220327
pk.10

Material
Thread

Bore
For Tubing

Part No.
Qty.



PP
Luer Lock male
to Barbed
2.5 mm
1/8" ID
220328
pk.10



PP
Luer Lock female
to Luer Lock female
0.4 mm
220329
pk.10




HPLC Certified Plastic
Disposable Syringes
see page 57

Plugs

					
	max. 1375 bar	max. 350 bar			
Material	SS	PEEK	ETFE	PEEK	POM
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/4"-28	1/4"-28
Part No.	220330	220331	220332	220333	220334
Qty.	ea.	pk. 5	pk. 10	pk. 5	pk. 10

					
			max. 690 bar		
Material	SS	SS	PEEK		
Thread	1/8" 5/16"-24	1/4" 7/16"-20	360µm 2-56		
Part No.	220335	220336	202002		
Qty.	ea.	ea.	ea.		

Caps

					
	max. 1375 bar	max. 350 bar			
Material	SS, high Pressure	PEEK	ETFE	PEEK	ETFE
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/4"-28	1/4"-28
Miscellaneous	(incl. cap, nut & ferrule)	(incl. cap, nut & ferrule)			
Part No.	200972	220338	220339	220340	220341
Qty.	ea.	ea.	pk. 10	ea.	pk. 10

					
			max. 690 bar	max. 690 bar	max. 1375 bar
Material	SS	SS	PEEK,	SS	SS
Thread	1/8" 5/16"-24	1/4" 7/16"-20	360µm 2-56 thread	360µm 2-56 thread	360µm 2-56 thread
Miscellaneous	(incl. cap, nut & ferrule)	(incl. cap, nut & ferrule)		FS Type	Metal Type
Part No.	200973	220343	202001	202021	202031
Qty.	ea.	ea.	ea.	ea.	ea.


PerfectPeak® Static Mixers for UHPLC and HPLC

- Easily to install into any system
- Up to 80 % baseline noise reduction
- Improve detection limits
- Passivated 316(L) Stainless Steel
- Max. pressure 1378 bar (20.000 psi)
- Bioinert Titanium version available

					
Volume	25 µl	50 µl	100 µl	100 µl	150 µl
Thread	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" 10-32	1/16" 10-32
Part No.	220400	220401	220402	220405	220403
Qty.	ea.	ea.	ea.	ea.	ea.

Baseline Noise

Perfect PEAK

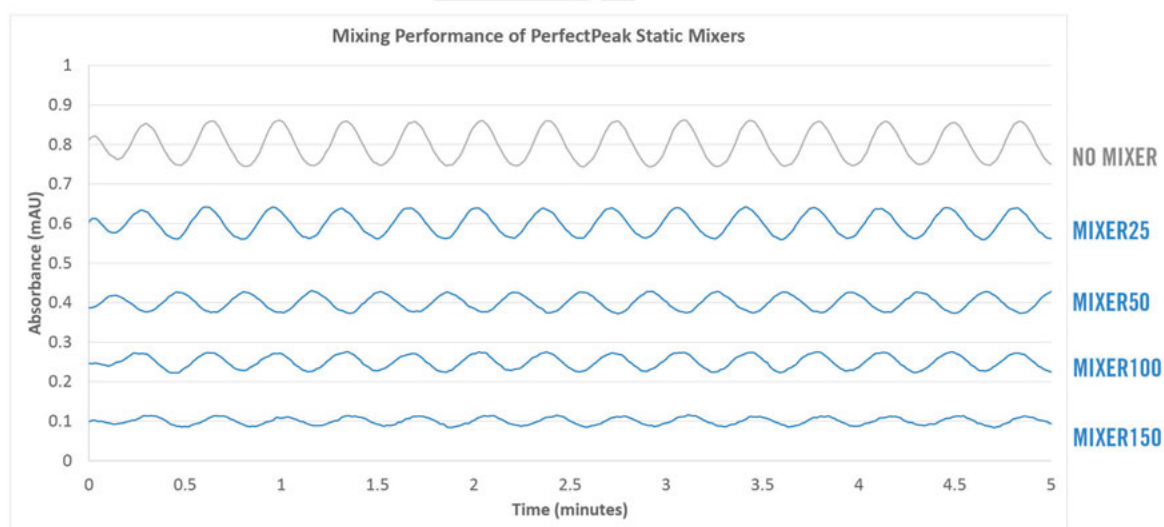

BGB HPLC Columns

www.bgb-shop.com/hplc-columns

HPLC Safety Products

Safety-Caps GL45 with Safety Air Inlet Valve Standard

Safety-Caps GL45 are available in blue, green, red, purple and yellow.

Standard

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-S45F1
SP-S45F1-G
SP-S45F1-R
SP-S45F1-V
SP-S45F1-Y

ea.



2x 1/8"

SP-S45F2
SP-S45F2-G
SP-S45F2-R
SP-S45F2-V
SP-S45F2-Y

ea.



3x 1/8"

SP-S45F3
SP-S45F3-G
SP-S45F3-R
SP-S45F3-V
SP-S45F3-Y

ea.



-G

-R

-V

-Y

Standard

Tubing Ports

Part No.

Qty.



4x 1/8"

SP-S45F4
SP-S45F4-G
SP-S45F4-R
SP-S45F4-V
SP-S45F4-Y

ea.



5x 1/8"

SP-S45F5
SP-S45F5-G
SP-S45F5-R
SP-S45F5-V
SP-S45F5-Y

ea.



6x 1/8"

SP-S45F6
SP-S45F6-G
SP-S45F6-R
SP-S45F6-V
SP-S45F6-Y

ea.

Colour and type of the nuts can vary.

with Lock

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-S45F1-L

ea.



2x 1/8"

SP-S45F2-L

ea.



3x 1/8"

SP-S45F3-L

ea.



4x 1/8"

SP-S45F4-L

ea.

Safety Air Inlet Valve and Safety Air Inlet Filters for Safety-Caps

Description

Part No.

Qty.



Safety Air Inlet Filter
CO₂ (Carbon Dioxide)
removal

211998-CO2

ea.



Safety Air Inlet Filter
Humidity removal

211998-H

ea.



Safety Air Inlet Valve
Standard

SP-SAIV

ea.



Safety Air Inlet Valve
for basic Amine Solvents

SP-SAIV-A

ea.



Safety Air Inlet Valve
Prep

SP-SAIV-P

ea.

Safety-Caps GL45 for Prep HPLC with Safety Air Inlet Valve Standard

up to
150 ml/min
flow

Tubing Ports

Part No.

Qty.



1x 1/4"

SP-S45P141

ea.



1x 1/4"
1x 1/8"

SP-S45F1P141

ea.



1x 3/16"

SP-S45P3161

ea.



2x 3/16"

SP-S45P3162

ea.



3x 3/16"

SP-S45P3163

ea.

Safety-Caps S55 for Prep HPLC with Safety Air Inlet Valve Prep

New

up to
500 ml/min
flow

Tubing Port

Part No.

Qty.



1x 3/16"

SP-S55P316

ea.



1x 1/4"
1x 3/16"

SP-S55P316P141

ea.



1x 1/4"
1x 1/8"

SP-S55F1P141

ea.

Safety-Caps S60 for Prep HPLC with Safety Air Inlet Valve Prep

New

up to
500 ml/min
flow

Tubing Port

Part No.

Qty.



1x 1/4"

SP-S60P141

ea.



1x 3/16"

SP-S60P316

ea.



1x 1/4"
1x 3/16"

SP-S60P316P141

ea.



1x 1/4"
1x 1/8"

SP-S60F1P141

ea.

Safety-Caps Ground Neck Bottle 29/32 mm with Air Inlet Valve Standard

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-SGNF1

ea.



2x 1/8"

SP-SGNF2

ea.



3x 1/8"

SP-SGNF3

ea.



4x 1/8"

SP-SGNF4

ea.



Safety-Adapter
Ground Neck
29/32mm (male) to
GL45 (male)

SP-AGN45

ea.

Colour and type of the nuts can vary.

Waste-Caps GL45 with Safety-Waste-Filter Port



Waste-Caps GL45 are available in blue, green, red, purple and yellow. Please contact us for colored version.

Tubing Ports

Part No.
Qty.



1x 1/8"
SP-W45F1
ea.



1x 1/8"
1x Barbed*
SP-W45F1B1
ea.



1x 1/8"
2x Barbed*
SP-W45F1B2
ea.



1x Barbed*
SP-W45B1
ea.

Tubing Ports

Part No.
Qty.



2x 1/8"
SP-W45F2
ea.



2x 1/8"
1x Barbed*
SP-W45F2B1
ea.



2x 1/8"
2x Barbed*
SP-W45F2B2
ea.



2x Barbed*
SP-W45B2
ea.

Tubing Ports

Part No.
Qty.



3x 1/8"
SP-W45F3
ea.



3x 1/8"
1x Barbed*
SP-W45F3B1
ea.



4x 1/8"
SP-W45F4
ea.



4x 1/8"
1x Barbed*
SP-W45F4B1
ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

Safety-Waste-Filters, Standard

Size
Service Life Time
Part No.
Qty.



Small
3 Months
SP-FSS
ea.



Medium
6 Months
SP-FSM
ea.



Large
12 Months
SP-FSL
ea.

More HPLC Waste-Caps
www.bgb-shop.com/waste-caps

Waste-Caps S50 with Safety-Waste-Filter Port


Tubing Ports				
	1x 1/8"	1x 1/8" 1x Barbed*	1x 1/8" 2x Barbed*	1x 1/8" 3x Barbed*
	Part No. SP-W50F1	Part No. SP-W50F1B1	Part No. SP-W50F1B2	Part No. SP-W50F1B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	2x 1/8"	2x 1/8" 1x Barbed*	2x 1/8" 2x Barbed*	2x 1/8" 3x Barbed*
	Part No. SP-W50F2	Part No. SP-W50F2B1	Part No. SP-W50F2B2	Part No. SP-W50F2B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	3x 1/8"	3x 1/8" 1x Barbed*	3x 1/8" 2x Barbed*	3x 1/8" 3x Barbed*
	Part No. SP-W50F3	Part No. SP-W50F3B1	Part No. SP-W50F3B2	Part No. SP-W50F3B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	4x 1/8"	5x 1/8"	2x 1/8" 1x Barbed*	Waste Canister S50 PP, 5 Liter with Liter Graduation Small Footprint
	Part No. SP-W50F4	Part No. SP-W50F5	Part No. SP-W50F2B1-I	Part No. SP-C50PE5
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Miscellaneous	-	-	Level Indicator	

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.



Safety Waste Filter
see page 85



Polymeric Tubing
see page 64

Waste-Caps S55 (DIN 51) with Safety-Waste-Filter Port

Tubing Ports				
	1x 1/8"	1x 1/8" 1x Barbed*	1x 1/8" 2x Barbed*	1x 1/8" 3x Barbed*
	Part No. SP-W55F1	Part No. SP-W55F1B1	Part No. SP-W55F1B2	Part No. SP-W55F1B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	2x 1/8"	2x 1/8" 1x Barbed*	2x 1/8" 2x Barbed*	2x 1/8" 3x Barbed*
	Part No. SP-W55F2	Part No. SP-W55F2B1	Part No. SP-W55F2B2	Part No. SP-W55F2B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	3x 1/8"	3x 1/8" 1x Barbed*	3x 1/8" 2x Barbed*	3x 1/8" 3x Barbed*
	Part No. SP-W55F3	Part No. SP-W55F3B1	Part No. SP-W55F3B2	Part No. SP-W55F3B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	4x 1/8"	3x Barbed*	1x 1/8" 2x Barbed*	1x 1/8" 3x Barbed*
	Part No. SP-W55F4	Part No. SP-W55B3	Part No. SP-W55F1B2-I	Part No. SP-W55F1B3-I
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Miscellaneous	-	-	Level Indicator	Level Indicator

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

More HPLC Waste-Caps
www.bgb-shop.com/waste-caps

Waste-Caps S60/61 (DIN 60) with Safety-Waste-Filter Port

Tubing Ports				
	1x 1/8 "	1x 1/8 " 1x Barbed*	1x 1/8 " 2x Barbed*	1x 1/8 " 3x Barbed*
	Part No. SP-W60F1	Part No. SP-W60F1B1	Part No. SP-W60F1B2	Part No. SP-W60F1B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	2x 1/8 "	2x 1/8 " 1x Barbed*	2x 1/8 " 2x Barbed*	2x 1/8 " 3x Barbed*
	Part No. SP-W60F2	Part No. SP-W60F2B1	Part No. SP-W60F2B2	Part No. SP-W60F2B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	3x 1/8 "	3x 1/8 " 1x Barbed*	3x 1/8 " 2x Barbed*	3x 1/8 " 3x Barbed*
	Part No. SP-W60F3	Part No. SP-W60F3B1	Part No. SP-W60F3B2	Part No. SP-W60F3B3
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.
Tubing Ports				
	4x 1/8 "	5x 1/8 "	5x 1/8 " 3x Barbed*	4x Barbed*
	Part No. SP-W60F4	Part No. SP-W60F5	Part No. SP-W60F5B3	Part No. SP-W60B4
	Qty. ea.	Qty. ea.	Qty. ea.	Qty. ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

Waste-Caps B53 (for NALGENE® Bottles & Canister) with Safety-Waste-Filter Port

				
Tubing Ports	1x 1/8" 1x Barbed*	2x 1/8" 1x Barbed*	3x 1/8" 1x Barbed*	3x 1/8"
Part No.	SP-W53F1B1	SP-W53F2B1	SP-W53F3B1	SP-W53F3
Qty.	ea.	ea.	ea.	ea.

Waste-Caps B83 (for NALGENE® Bottles & Canister) with Safety-Waste-Filter Port


			
Tubing Ports	1x 1/8" 1x Barbed*	2x 1/8" 1x Barbed*	3x 1/8" 1x Barbed*
Part No.	SP-W83F1B1	SP-W83F2B1	SP-W83F3B1
Qty.	ea.	ea.	ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.

Safety-Waste-Filters, Standard

			
Size	Small	Medium	Large
Service Life Time	3 Months	6 Months	12 Months
Part No.	SP-FSS	SP-FSM	SP-FSL
Qty.	ea.	ea.	ea.



Polymeric Tubing
see page 64

More HPLC Waste-Caps
www.bgb-shop.com/waste-caps

Waste-Caps S90 (DIN 90) with Safety-Waste-Filter Port

Tubing Ports

Part No.

Qty.



1x 1/8"

SP-W90F1

ea.



2x 1/8"

SP-W90F2

ea.



3x 1/8"

SP-W90F3

ea.



4x 1/8"

SP-W90F4

ea.



5x 1/8"

SP-W90F5

ea.

Tubing Ports

Part No.

Qty.



6x 1/8"

SP-W90F6

ea.



2x 1/8"

1x Barbed*

SP-W90F2B1

ea.



2x 1/8"

2x Barbed*

SP-W90F2B2

ea.



2x 1/8"

3x Barbed*

SP-W90F2B3

ea.



2x 1/8"

4x Barbed*

SP-W90F2B4

ea.

Tubing Ports

Part No.

Qty.



6x 1/8"

2x Barbed*

SP-W90F6B2

ea.



3x 1/8"

1x Barbed*

SP-W90F3B1

ea.



3x 1/8"

2x Barbed*

SP-W90F3B2

ea.



3x 1/8"

3x Barbed*

SP-W90F3B3

ea.



3x 1/8"

4x Barbed*

SP-W90F3B4

ea.

Tubing Ports

Part No.

Qty.



1x Barbed*

SP-W90B1

ea.



2x Barbed*

SP-W90B2

ea.



3x Barbed*

SP-W90B3

ea.



4x Barbed*

SP-W90B4

ea.




5x Barbed*

SP-W90B5

ea.

* includes Barbed Tubing Port Fitting for 6-9 mm ID Tubing.

Colour and type of the nuts can vary.



Polymeric Tubing
see page 64

Safety-Waste-Filters and Adapters

Type & Size				
Service Life Time	Safety-Waste-Filter Standard, SMALL 3 Months	Safety-Waste-Filter Standard, MEDIUM 6 Months	Safety-Waste-Filter Standard, LARGE 12 Months	
Part No.	SP-FSS	SP-FSM	SP-FSL	
Qty.	ea.	ea.	ea.	
Type & Size				
Service Life Time	Safety-Waste-Filter Acid Vapor, MEDIUM 3 Months	Safety-Waste-Filter Acid Vapor, LARGE 6 Months	Safety-Adapter Straight Extension 50 mm for Safety-Waste-Filter Port	Safety-Adapter 90° Extension 45 mm for Safety-Waste-Filter Port
Part No.	SP-FAM	SP-FAL	SP-AF5E	SP-AF90E
Qty.	ea.	ea.	ea.	ea.
Type & Size				
Miscellaneous	Safety-Waste-Filter Standard with Indicator requires Adapter 211999	Safety-Adapter to install Safety-Waste-Filter with Indicator 211998-I to Safety-Waste-Filter Port	Safety-Waste-Filter XL for Barrels 3 – 6 Months Service Life	Safety-Waste-Filter XXL for Barrels 9 – 12 Months Service Life
Part No.	211998-I	211999	SP-FSXL	SP-FSXXL
Qty.	ea.	ea.	ea.	ea.

Barbed Tubing Port Fittings

Material
Type
for Tubing ID



PP
Straight
3.0-4.0 mm

Part No.

SP-BFS34PP

Qty.

ea.



PP
Straight
5.0-6.0 mm

SP-BFS56PP

ea.



PP
Straight
6.0-9.0 mm

SP-BFS69PP

ea.



PP
Straight
9.0-11.0 mm

SP-BFS911PP

ea.



Material
Type
for Tubing ID

PP
90° Angled
3.0-4.0 mm

Part No.

SP-BFA34PP

Qty.

ea.



PP
90° Angled
5.0-6.0 mm

SP-BFA56PP

ea.



PP
90° Angled
6.0-9.0 mm

SP-BFA69PP

ea.



PP
90° Angled
9.0-11.0 mm

SP-BFA911PP

ea.

Barbed Tubing Connectors



Conical

Part No.	Material	Tubing ID mm	Qty.
SP-AC4280	PP	4.2-8.0 to 4.2-8.0	ea.
SP-AC6565	PP	6.5 to 6.5	ea.
SP-AC1612	PP	10.5-16.0 to 6.5-12.0	ea.
SP-AC1675	PP	10.5-16.0 to 3.0-7.5	ea.
SP-AC7012	PP	7.0-11.0 to 7.0-12.0	ea.
SP-AC1512	PP	11.0-15.0 to 7.0-12.0	ea.




Y-Connector

Part No.	Material	Tubing ID mm	Qty.
SP-AY3PP	PP	3.0	ea.
SP-AY5PP	PP	5.0	ea.
SP-AY7PP	PP	7.0	ea.
SP-AY9PP	PP	9.0	ea.
SP-AY11PP	PP	11.0	ea.

More HPLC Barbed Tubing Port
Fittings and Connectors

www.bgb-shop.com/safety-accessories



Polymeric Tubing
see page 64

Safety Thread Adapters



to GL 45 Caps

Part No.	Material	Thread to Bottle (female)	Thread to Cap (male)	Qty.
SP-A2845PTFE	PTFE	PP28	GL45	ea.
SP-A3245PTFE	PTFE	GL32	GL45	ea.
SP-A3245PP	PP	GL32	GL45	ea.
SP-A3845PTFE	PTFE	GL38	GL45	ea.
SP-A3845PP	PP	GL38	GL45	ea.
SP-A4045PTFE	PTFE	GL40	GL45	ea.
SP-A4045PP	PP	GL40	GL45	ea.
SP-A454545	PP	GL45	2 x GL45	ea.
SP-A4545X4	PP	GL45	4 x GL45	ea.



to different Threads/Caps

Part No.	Material	Thread (female)	Thread (male)	Qty.
SP-A4032PP	PP	GL40	GL32	ea.
SP-A4038PP	PP	GL40	GL38	ea.
SP-A4532PP	PP	GL45	GL32	ea.
SP-A4538PP	PP	GL45	GL38	ea.
SP-A4555PP	PP	GL45	S55	ea.
SP-A5560PP	PP	S55	S60	ea.
SP-A5590PP	PP	S55	S90	ea.
SP-A6090PP	PP	S60	S90	ea.



Safety Funnels

www.bgb-shop.com/safety-funnel

Fittings, Nuts, Ferrules and Plugs for BGB Safety Products



Fittings 1/16 "

Part No.	Type	Color	Qty.
SP-NOPBLK16	Fitting One-Piece	Black	pk.5
SP-NOPVIO16	Fitting One-Piece	Purple	pk.5
SP-NBLK16	Nut	Black	pk.10
SP-NBLU16	Nut	Blue	pk.10
SP-NGRE16	Nut	Green	pk.10
SP-NVIO16	Nut	Purple	pk.10
SP-NRED16	Nut	Red	pk.10
SP-NF16	Ferrule 1/16" OD Tubing	Blue	pk.10

Fittings 1/8 "

Part No.	Type	Color	Qty.
SP-NOPBLK18	Fitting One-Piece	Black	pk.5
SP-NOPVIO18	Fitting One-Piece	Purple	pk.5
SP-NBLK18	Nut	Black	pk.10
SP-NBLU18	Nut	Blue	pk.10
SP-NGRE18	Nut	Green	pk.10
SP-NVIO18	Nut	Purple	pk.10
SP-NRED18	Nut	Red	pk.10
SP-NF18	Ferrule 1/8" OD Tubing	Yellow	pk.10



Nuts & Ferrules 3/16 "

Part No.	Type	Color	Qty.
SP-NWHI316	Nut	White	ea.
SP-NF316	Ferrule	Blue	ea.




Plugs

Part No.	Type	Color	Qty.
SP-NP18	for 1/8"-Tubing Port	Black	pk.10
SP-NPFIL	for Safety-Waste-Filter Port	Black	ea.
SP-NPBAR	for Barbed Tubing Port	Black	pk.5
SP-NP14	for 1/4"-Tubing Port	Black	ea.

SETonic Syringes

Technical Syringe Information

23s-26s Dual Gauge Tapered Needle



- ⇒ Split/Splitless or On-Column injections
- ⇒ Versatility without sacrificing durability
- ⇒ More solid needle than regular 26s
- ⇒ Minimizes septum abrasion

23s Gauge Needle



- ⇒ Most durable needle
- ⇒ Merlin MicroSeal™ and standard septum injections
- ⇒ Packed column injections
- ⇒ Split/splitless injections

26s Gauge Needle



- ⇒ Fine gauge offers versatility
- ⇒ On-column injections
- ⇒ Split/splitless injections

Gauge Index Table

Gauge	Nominal OD mm*	Nominal ID mm*	Wall Thickness mm*	Volume μL/Inch
26s	0.474	0.127	0.35	0.322
26	0.464	0.260	0.20	1.349
25s	0.515	0.153	0.36	0.464
25	0.515	0.260	0.25	1.349
24	0.566	0.311	0.25	1.930
23s	0.642	0.116	0.53	0.268
23	0.642	0.337	0.30	2.266
22s	0.718	0.168	0.55	0.563
22	0.718	0.413	0.30	3.403
21	0.819	0.514	0.30	5.271
20	0.908	0.603	0.30	7.255
19	1.067	0.686	0.38	9.389

*mm are nominal

Plunger Tips

- PE-HD — with better durability than virginial PTFE when working with saline solutions
- PTFE — gas tight sealing of the plunger tip, for most solvents and chemicals
- PTFE NUB — PTFE compound with highest durability and chemical resistant combined with low electrostatic effects
- SS-Gold coated* — Gold coated stainless steel, developed for use with aggressive solvents (e.g. strong acids)

*regular SS plunger syringes are available as gold coated version on request

Syringe Terminations

FN - Fixed Needle



LT - Luer Tip (with Fixed Needle)



TLL/TLL-X - Teflon (PTFE) Luer Lock



RN - Removable Needle



LT - Luer Tip (without Needle)



1/4"-28 UNF



Needle Tip Styles

SGE Hamilton

Type AS and c		Special conical needle recommended for septum penetration (Autosampler Type).	1	AS
Type a		Beveled needle is recommended for life science applications.	2	4
Type b		Blunt needle for use with HPLC-Injection valves and for sample pipetting.	3	3
Type d		Conical needle with side port is recommended for penetration of septa, thin-gauged vinyls and plastics without coring (Headspace GC).	5	5



Microsyringes 0.5 µl-10 µl – Needle Tip Style AS, Needle Length 42 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030151	0.5 µl	SS (In Needle)	RN	0.64 mm (23s)	ea.
SET-3030152	1 µl	SS (In Needle)	RN	0.64 mm (23s)	ea.
SET-3030129	5 µl	SS	RN	0.47 mm (26s)	ea.
SET-3030130	5 µl	SS	RN	0.64-0.47 mm (23s-26s)	ea.
SET-3030138	10 µl	SS	RN	0.64 mm (23s)	ea.
SET-3030137	10 µl	SS	RN	0.64-0.47 mm (23s-26s)	ea.
SET-3030166	10 µl	PTFE	RN	0.64 mm (23s)	ea.
SET-3030165	10 µl	PTFE	RN	0.64-0.47 mm (23s-26s)	ea.

SETonic Syringes for Agilent GC Autosampler - Fixed Needle



Microsyringes 5 µl-100 µl – Needle Tip Style AS, Needle Length 42 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030128	5 µl	SS	FN	0.64 mm (23s)	ea.
SET-3030133	5 µl	SS	FN	0.64 mm (23s)	pk.6
SET-3030127	5 µl	SS	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030132	5 µl	SS	FN	0.64-0.47 mm (23s-26s)	pk.6
SET-3030126	5 µl	SS	FN	0.47 mm (26s)	ea.
SET-3030131	5 µl	SS	FN	0.47 mm (26s)	pk.6
SET-3030136	10 µl	SS	FN	0.64 mm (23s)	ea.
SET-3030141	10 µl	SS	FN	0.64 mm (23s)	pk.6
SET-3030135	10 µl	SS	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030140	10 µl	SS	FN	0.64-0.47 mm (23s-26s)	pk.6
SET-3030134	10 µl	SS	FN	0.47 mm (26s)	ea.
SET-3030139	10 µl	SS	FN	0.47 mm (26s)	pk.6
SET-3030163	10 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-3030167	10 µl	PTFE	FN	0.47 mm (26s)	pk.6
SET-3030164	10 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030168	10 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	pk.6
SET-3030169	25 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-3030174	25 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030170	50 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-3030175	50 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.
SET-3030171	100 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-3030176	100 µl	PTFE	FN	0.64-0.47 mm (23s-26s)	ea.



Syringes 10 µl-5 ml – Needle Tip Style b, Needle Length 51 mm – **Type LC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2106424	10 µl	SS	FN	0.72 mm (G22s)	ea.
SET-LMK.2606416	10 µl	PTFE	FN	0.72 mm (G22s) with knop	ea.
SET-LMK.2620517	25 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2620517-2P	25 µl	PTFE	FN	0.72 mm (G22s)	pk.2
SET-LMK.2620517-6P	25 µl	PTFE	FN	0.72 mm (G22s)	pk.6
SET-LMK.2620615	50 µl	PTFE	FN	0.72 mm (G22)	ea.
SET-LMK.2620615-2P	50 µl	PTFE	FN	0.72 mm (G22)	pk.2
SET-LMK.2620615-6P	50 µl	PTFE	FN	0.72 mm (G22)	pk.6
SET-LMK.2620719	100 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2620719-2P	100 µl	PTFE	FN	0.72 mm (G22s)	pk.2
SET-LMK.2620719-6P	100 µl	PTFE	FN	0.72 mm (G22s)	pk.6
SET-LMK.2620721	100 µl	PTFE	FN	0.72 mm (G22)	ea.
SET-LMK.2620721-2P	100 µl	PTFE	FN	0.72 mm (G22)	pk.2
SET-LMK.2620721-6P	100 µl	PTFE	FN	0.72 mm (G22)	pk.6
SET-LMK.2620821	250 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2620908	500 µl	PTFE	FN ¹⁾	0.72 mm (G22)	ea.
SET-LMK.2620011	1 ml	PTFE LT	FN ²⁾	0.72 mm (G22)	ea.
SET-LMK.2620054	5 ml	PTFE LT	FN ²⁾	1.10 mm (G19)	ea.

1) Needle Length 56 mm 2) Needle Length 57 mm

L-MARK® Syringes for CTC Combi PAL GC Autosampler

Syringes 1.2 µl-500 µl – Needle Tip Style AS, Needle Length 51 mm – **Type GC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2220001	1.2 µl	SS	FN	0.48 mm (G26P)	ea.
SET-LMK.2220001-6P	1.2 µl	SS	FN	0.48 mm (G26P)	pk.6
SET-LMK.2106303	5 µl	SS	FN	0.64 mm (G23s)	ea.
SET-LMK.2106302	5 µl	SS	FN	0.47 mm (G26s)	ea.
SET-LMK.2106403	10 µl	SS	FN	0.64 mm (G23s)	ea.
SET-LMK.2106426	10 µl	SS	FN	0.64-0.47 mm (23s-26s)	ea.
SET-LMK.2106416	10 µl	SS	FN	0.47 mm (G26s)	ea.
SET-LMK.2106416-2P	10 µl	SS	FN	0.47 mm (G26s)	pk.2
SET-LMK.2106416-6P	10 µl	SS	FN	0.47 mm (G26s)	pk.6
SET-LMK.2606407	10 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-LMK.2606403	10 µl	PTFE	FN	0.64 mm (G23s)	ea.
SET-LMK.2620706	100 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-LMK.2620706-2P	100 µl	PTFE	FN	0.47 mm (G26s)	pk.2
SET-LMK.2620706-6P	100 µl	PTFE	FN	0.47 mm (G26s)	pk.6
SET-LMK.2620803	250 µl	PTFE	FN	0.47 mm (G26)	ea.
SET-LMK.2620903	500 µl	PTFE	FN	0.47 mm (G26)	ea.



Syringes 10 µl-1 ml – Needle Tip Style AS, Needle Length 57 mm – **Type GC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2116405	10 µl	SS	FN	0.64 mm (23s)	ea.
SET-LMK.2116404	10 µl	SS	FN	0.47 mm (26s)	ea.
SET-LMK.2116406	10 µl	SS	FN ¹⁾	0.47 mm (26s)	ea.
SET-LMK.2616405	10 µl	PTFE	FN	0.64 mm (23s)	ea.
SET-LMK.2616404	10 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-LMK.2616703	100 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-LMK.2616803	250 µl	PTFE	FN	0.47 mm (26s)	ea.
SET-LMK.2616804	250 µl	PTFE	FN ¹⁾	0.47 mm (26s)	ea.
SET-LMK.2616003	1 ml	PTFE	FN	0.64 mm (23s)	ea.

1) Needle Length 85 mm

Syringes 10 µl-1 ml – Needle Tip Style b, Needle Length 57 mm – **Type LC**

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-LMK.2616422	10 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2616502C	25 µl	PTFE	FN	0.72 mm (G22s) coated ²⁾	ea.
SET-LMK.2616702C	100 µl	PTFE	FN	0.72 mm (G22s) coated ²⁾	ea.
SET-LMK.2616704C	100 µl	PTFE	FN	0.72 mm (G22) coated ²⁾	ea.
SET-LMK.2616822	250 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2616922	500 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-LMK.2616012	1 ml	PTFE	FN	0.72 mm (G22s)	ea.

2) hydrophobic, oleophobic coated syringe needle

SETonic Syringes for Spark Holland Autosamplers

The SETonic Syringes for Spark Holland Autosamplers work with the following manufacturers autosamplers:

- Spark Holland Midas, Triathlon, Endurance and Alias
- Beckmann Coulter 508
- Antec AS 100 and AS 110
- Grace/Alltech Model 580
- Dionex ESA Model 542, 540 and 540MT
- Agilent Pro Star



Part No.	Volume	Plunger Type	Syringe Termination	Qty.
SET-3010083	25 µl	PTFE	1/4" -28 UNF	ea.
SET-3010084	50 µl	PTFE	1/4" -28 UNF	ea.
SET-3010085	100 µl	PTFE	1/4" -28 UNF	ea.
SET-3010086	250 µl	PTFE	1/4" -28 UNF	ea.
SET-3010087	500 µl	PTFE	1/4" -28 UNF	ea.
SET-3010088	1 ml	PTFE	1/4" -28 UNF	ea.
SET-3010089	2.5 ml	PTFE	1/4" -28 UNF	ea.



TLL Syringes 25 µl-25 ml, Standard Plunger

Part No.	Volume	Plunger Type	Termination	Qty.
SET-3010299	25 µl	PTFE	Luer Lock	ea.
SET-3010300	50 µl	PTFE	Luer Lock	ea.
SET-3010317	100 µl	PTFE	Luer Lock	ea.
SET-3010318	250 µl	PTFE	Luer Lock	ea.
SET-3010319	500 µl	PTFE	Luer Lock	ea.
SET-3010175	1 ml	PTFE	Luer Lock	ea.
SET-3010176	2.5 ml	PTFE	Luer Lock	ea.
SET-3010177	5 ml	PTFE	Luer Lock	ea.
SET-3010179	25 ml	PTFE	Luer Lock	ea.

TLL-X Syringes 25 µl-10 ml, Plunger with 6-32UNC inside thread to allow attachment to drive arm mechanism

Part No.	Volume	Plunger Type	Termination	Qty.
SET-3010262	25 µl	PTFE	Luer Lock	ea.
SET-3010263	50 µl	PTFE	Luer Lock	ea.
SET-3010264	100 µl	PTFE	Luer Lock	ea.
SET-3010265	250 µl	PTFE	Luer Lock	ea.
SET-3010266	500 µl	PTFE	Luer Lock	ea.
SET-3010267	1 ml	PTFE	Luer Lock	ea.
SET-3010268	2.5 ml	PTFE	Luer Lock	ea.
SET-3010269	5 ml	PTFE	Luer Lock	ea.
SET-3010270	10 ml	PTFE	Luer Lock	ea.

Gas Tight Microsyringes – Fixed Needle



Syringes 5 µl-500 µl - Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030241	5 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-3030242	10 µl	PTFE	FN	0.47 mm (G26s)	ea.
SET-3030243	25 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-3030244	50 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-3030245	100 µl	PTFE	FN	0.72 mm (G22s)	ea.
SET-3030246	250 µl	PTFE	FN	0.72 mm (G22)	ea.
SET-3030247	500 µl	PTFE	FN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.



Syringes 1 ml-10 ml

Part No.	Volume	Needle	OD (Gauge)	Needle Length	Point Style	Qty.
SET-3030249	1 ml	FN	0.72 mm (G22)	51 mm	a	ea.
SET-3030248	1 ml	FN	0.64 mm (G23)	51 mm	a	ea.
SET-3030186*	1 ml	FN	0.64 mm (G23)	51 mm	d	ea.
SET-3030250	2.5 ml	FN	0.72 mm (G22s)	51 mm	a	ea.
SET-3030154	2.5 ml	FN	0.72 mm (G22)	51 mm	a	ea.
SET-3030187*	2.5 ml	FN	0.64 mm (G23)	51 mm	d	ea.
SET-3030251	5 ml	FN	0.72 mm (G22s)	51 mm	a	ea.
SET-3030155	5 ml	FN	0.72 mm (G22)	51 mm	a	ea.
SET-3030188*	5 ml	FN	0.64 mm (G23)	56 mm	d	ea.
SET-3030252	10 ml	FN	0.72 mm (G22s)	51 mm	a	ea.
SET-3030156	10 ml	FN	0.72 mm (G22)	51 mm	a	ea.

* High temperature syringes up to 120 °C.

Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

Gas Tight Syringes – Removable Needle



Microsyringes 5 µl-10 ml - Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030544	5 µl	PTFE	RN	0.47 mm (G26s)	ea.
SET-3030676	10 µl	PTFE	RN	0.47 mm (G26s)	ea.
SET-3030604	25 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030605	50 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030606	100 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030366	250 µl	PTFE	RN	0.72 mm (G22s)	ea.
SET-3030607	500 µl	PTFE	RN	0.72 mm (G22)	ea.
SET-3030368	1 ml	PTFE	RN	0.72 mm (G22)	ea.
SET-3030672	2.5 ml	PTFE	RN	0.72 mm (G22)	ea.
SET-3030673	5 ml	PTFE	RN	0.72 mm (G22)	ea.
SET-3030674	10 ml	PTFE	RN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

Replacement Needles – Needle Tip Style a*, Needle Length 51 mm



Part No.	for Syringe Volume	OD (Gauge)	Qty.
SET-3050072	5 µl	0.47 mm (G26s)	pk.3
SET-3050022	10 µl	0.47 mm (G26s)	pk.3
SET-3050179	25 µl–10 ml	0.72 mm (G22)	pk.3
SET-3050036	25 µl–10 ml	0.72 mm (G22s)	pk.3

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.



Syringes Fixed Needle 5 µl-500 µl - Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030205	5 µl	SS	FN	0.47 mm (G26s)	ea.
SET-3030206	10 µl	SS	FN	0.47 mm (G26s)	ea.
SET-3030207	25 µl	SS	FN	0.72 mm (G22s)	ea.
SET-3030208	50 µl	SS	FN	0.72 mm (G22s)	ea.
SET-3030209	100 µl	SS	FN	0.72 mm (G22s)	ea.
SET-3030210	250 µl	SS	FN	0.72 mm (G22)	ea.
SET-3030211	500 µl	SS	FN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.



Syringes Removable Needle 5 µl-500 µl – Needle Tip Style a*, Needle Length 51 mm

Part No.	Volume	Plunger Type	Needle	OD (Gauge)	Qty.
SET-3030389	5 µl	SS	RN	0.47 mm (G26s)	ea.
SET-3030298	10 µl	SS	RN	0.47 mm (G26s)	ea.
SET-3030299	25 µl	SS	RN	0.72 mm (G22s)	ea.
SET-3030300	50 µl	SS	RN	0.72 mm (G22s)	ea.
SET-3030301	100 µl	SS	RN	0.72 mm (G22s)	ea.
SET-3030302	250 µl	SS	RN	0.72 mm (G22)	ea.
SET-3030303	500 µl	SS	RN	0.72 mm (G22)	ea.

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

Replacement Needles – Needle Tip Style a*, Needle Length 51mm




Part No.	for Syringe Volume	OD (Gauge)	Qty.
SET-3050072	5 µl	0.47 mm (G26s)	pk.3
SET-3050022	10 µl	0.47 mm (G26s)	pk.3
SET-3050179	25 µl–10 ml	0.72 mm (G22)	pk.3
SET-3050036	25 µl–10 ml	0.72 mm (G22s)	pk.3

* Also available in other pointstyles. For more info visit www.bgb-shop.com/setonic.

BGB Purification – Cartridge Hardware

Standard Sizes (Spin-Welded Technology)

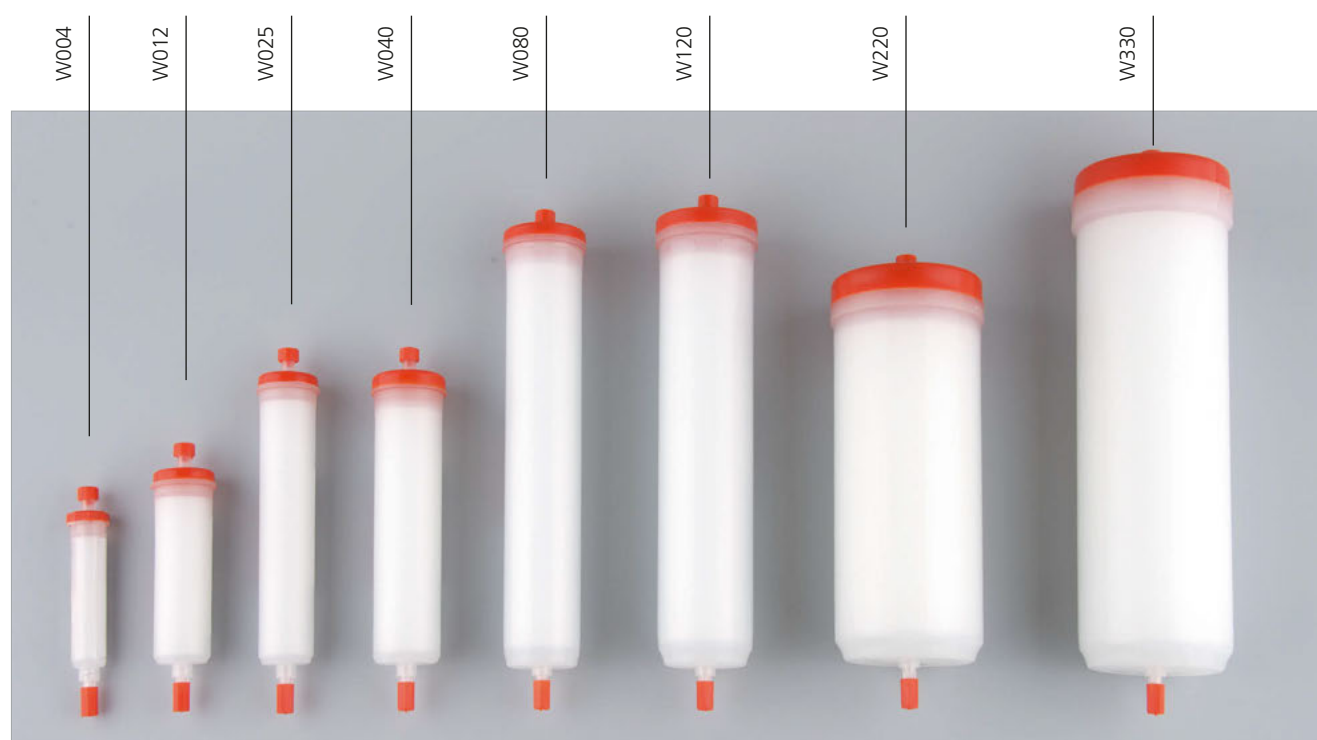

Hardware Parameters

Hardware Type	Inner Diameter	Bed Length	Column Volume	Max. Pressure	Frits Polyethylene	50µm Particle Size	30µm Particle Size
W004	12.4 mm	56 mm	5.1 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W012	21.4 mm	73 mm	19.7 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W025	21.4 mm	123.5 mm	33.3 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W040	26.7 mm	117.6 mm	49.4 ml	27.5 bar (400 psi)	Top Frit	16–20 µm	16–20 µm
					Bottom Frit	16–20 µm	5–10 µm
W080	31.2 mm	185 mm	106 ml	24.0 bar (350 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
W120	38.6 mm	189 mm	165.8 ml	20.5 bar (300 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
W220	61.4 mm	139.5 mm	309.6 ml	20.5 bar (300 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
W330	61.4 mm	199.2 mm	442.1 ml	17.0 bar (250 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm



Hardware Parameters

Hardware Type	Inner Diameter	Bed Length	Column Volume	Max. Pressure	Frits Polyethylene	50 µm Particle Size	30 µm Particle Size
S0800	78.2mm	313.3mm	1128ml	6.9 bar (100 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
S1600	103.8mm	353.7mm	2244ml	6.9 bar (100 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm
S3000	127.5mm	418.0mm	4000ml	6.9 bar (100 psi)	Top Frit	20–25 µm	16–20 µm
					Bottom Frit	20–25 µm	5–10 µm

Analytical & Preparative HPLC Columns

BGB analytical & preparative HPLC columns have been designed to offer you the easiest way to develop your reversed phase methods and to scale-up your purifications with strictly the same material in term of stationary phase, particle size and pore size. All bonded phases are available in classical stainless steel analytical HPLC columns (4.6 x 150 mm and 4.6 x 250 mm), preparative HPLC columns (I.D. from 21.2 to 50 mm) and plastic flash cartridges (4 g to 3 kg of phase) to offer you a large choice of possibilities in term of development and scale-up.

Because of the use of standard 10–32 fittings, BGB HPLC columns are compatible with all HPLC systems on the market.

Features include

- High quality SS analytical columns with dimensions of 4.6 x 150 mm and/or 4.6 x 250 mm.
- Preparative HPLC columns with I.D. from 21.2 mm to 50.0 mm.
- Strictly similar bonded phases as those used for our flash cartridges for easy scale-up.
- Available in Scorpius C18, Aquarius C18AQ, Taurus C18T, Taurus C8T and Taurus C4T.
- Dedicated Taurus 300 Å wide pore materials for peptides and proteins purification.
- Particle size of 5 µm, 10 µm, 15 µm and 30 µm.
- Compatible with all HPLC systems on the market.



Column parameters

Hardware	Thread	Inner Diameter	Length	Max. Pressure	Frits
Analytical	10–32	4.6 mm	150 mm	480 bar (7'000 psi)	2 µm
			250 mm		
Semi preparative	10–32	21.2 mm	150 mm	400 bar (6'000 psi)	2 µm
			250 mm		
Preparative	10–32	30.0 mm 50.0 mm	150 mm	400 bar (6'000 psi)	2 µm
			250 mm		

Column certificate

All BGB HPLC columns are individually tested to ensure a high quality and reproducibility from column to column and lot to lot. Each column is delivered with its own analysis report and wear a sticker indicating part number, column type, dimensions, serial number and flow direction.




Bulk Material


Additionally to our HPLC columns and our flash cartridges, BGB Analytik proposes also the possibility to order the spherical bulk materials bonded phases for Scorpius C18, Aquarius C18AQ, Taurus C18T, Taurus C8T and Taurus C4T. In boxes of 100 g or 1 kg, all these phases are available in 5 µm, 10 µm, 15 µm or 30 µm particle size. Combined with our empty flash cartridge portfolio, it offers you the possibility to pack your own column or to have the right phase to make your dry load. It allows you also the possibility to pack your own preparative columns with all self-packing instruments available on the market.



BGB Selection Guide

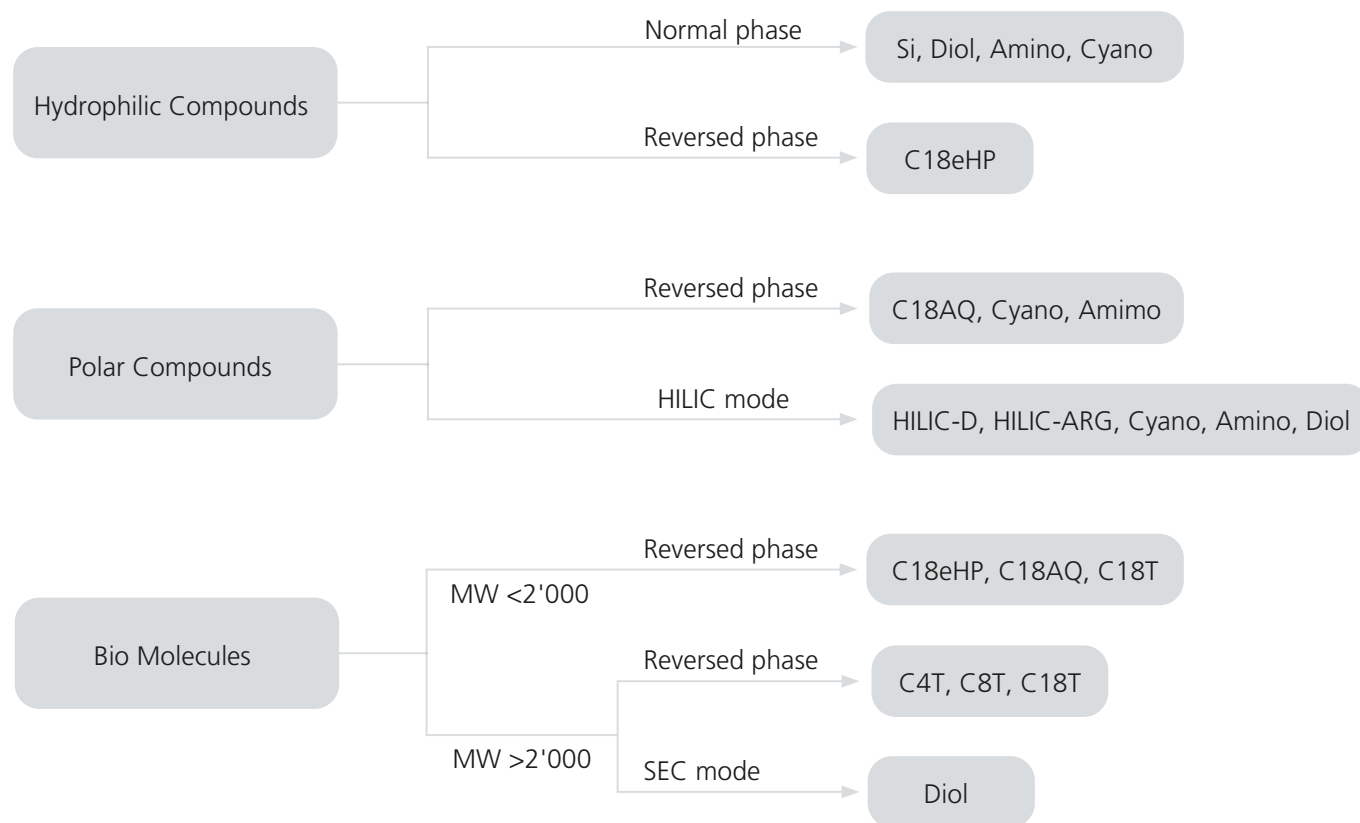

BGB Scorpion Silica



Phase:	Irregular Ultra-Pure Silica	
Particle Size:	30 µm	50 µm
Pore Size:	60 Å	60 Å
Surface Area:	500 m ² /g	500 m ² /g
Endcapped:	n.a.	n.a.
Carbon Load:	n.a.	n.a.
pH Range:	2–8	2–8



BGB Scorpion Silica (Si) Flash Cartridges

Part No.	Description	Qty.
BSS2AF-W004	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 4 g	pk.20
BSS2AF-W012	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 12 g	pk.18
BSS2AF-W025	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 25 g	pk.12
BSS2AF-W040	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 40 g	pk.12
BSS2AF-W080	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 80 g	pk.10
BSS2AF-W120	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 120 g	pk.10
BSS2AF-W220	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 220 g	pk.6 ⚠
BSS2AF-W330	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 330 g	pk.5 ⚠
BSS2AF-S0800	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 800 g	ea. ⚠
BSS2AF-S1600	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 1.6 kg	ea. ⚠
BSS2AF-S3000	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 30 µm (25–40 µm), 3 kg	ea. ⚠



Part No.	Description	Qty.
BSS2CF-W004	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 4 g	pk.20
BSS2CF-W012	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 12 g	pk.18
BSS2CF-W025	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 25 g	pk.12
BSS2CF-W040	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 40 g	pk.12
BSS2CF-W080	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 80 g	pk.10
BSS2CF-W120	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 120 g	pk.10
BSS2CF-W220	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 220 g	pk.6 ⚠
BSS2CF-W330	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 330 g	pk.5 ⚠
BSS2CF-S0800	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 800 g	ea. ⚠
BSS2CF-S1600	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 1.6 kg	ea. ⚠
BSS2CF-S3000	BGB Scorpion Flash Cartridge, Silica 60 Å, Irregular 50 µm (40–63 µm), 3 kg	ea. ⚠




⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.



Empty Flash column hardware
see page 115

BGB Scorpion C18e-HP



Phase:	Spherical Ultra-Pure C18 monomeric bonded				
Particle Size:	5 µm	10 µm	15 µm	30 µm	50 µm
Pore Size:	100 Å	100 Å	100 Å	100 Å	120 Å
Surface Area:	320 m ² /g	320 m ² /g	320 m ² /g	320 m ² /g	300 m ² /g
Endcapped:	yes	yes	yes	yes	yes
Carbon Load:	17 %	17 %	17 %	17 %	17 %
pH Range:	2–8	2–8	2–8	2–8	2–8



BGB Scorpion C18e-HP Flash Cartridges

Part No.	Description	Qty.
BSE1AF-W004	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 5.4 g	pk.2
BSE1AF-W012	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 20 g	ea.
BSE1AF-W025	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 33 g	ea.
BSE1AF-W040	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 48 g	ea.
BSE1AF-W080	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 105 g	ea.
BSE1AF-W120	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 155 g	ea.
BSE1AF-W220	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BSE1AF-W330	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 420 g	ea. ⚠
BSE1AF-S0800	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 1.08 kg	ea. ⚠
BSE1AF-S1600	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 2.14 kg	ea. ⚠
BSE1AF-S3000	BGB Scorpion Flash Cartridge, C18e-HP 100 Å, Spherical 30 µm, 3.83 kg	ea. ⚠



Part No.	Description	Qty.
BSC1CF-W004	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 4.5 g	pk.2
BSC1CF-W012	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 18 g	ea.
BSC1CF-W025	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 28 g	ea.
BSC1CF-W040	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 40 g	ea.
BSC1CF-W080	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 90 g	ea.
BSC1CF-W120	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 130 g	ea.
BSC1CF-W220	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 245 g	ea. ⚠
BSC1CF-W330	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 350 g	ea. ⚠
BSC1CF-S0800	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 900 g	ea. ⚠
BSC1CF-S1600	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 1.78 kg	ea. ⚠
BSC1CF-S3000	BGB Scorpion Flash Cartridge, C18e-HP 120 Å, Spherical 50 µm, 3.2 kg	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.



Adapters for Luer Ports
see page 74

BGB Scorpion C18e-HP Bulk Material

Part No.	Description	Qty.
BSE1IB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 5 µm, 100 g	ea.
BSE1IB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 5 µm, 1 kg	ea.
BSE1JB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 10 µm, 100 g	ea.
BSE1JB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 10 µm, 1 kg	ea.
BSE1KB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 15 µm, 100 g	ea.
BSE1KB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 15 µm, 1 kg	ea.
BSE1AB-K1	BGB Scorpion Bulk Material, C18e-HP 100 Å, 30 µm, 100 g	ea.
BSE1AB-K4	BGB Scorpion Bulk Material, C18e-HP 100 Å, 30 µm, 1 kg	ea.




BGB Scorpion C18e-HP HPLC Columns

Part No.	Description	Qty.
BSE1ICO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 4.6 x 150 mm	ea.
BSE1ICO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 4.6 x 250 mm	ea.
BSE1ICO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 21.2 x 150 mm	ea.
BSE1ICO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 5 µm, 21.2 x 250 mm	ea.
BSE1JCO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 4.6 x 150 mm	ea.
BSE1JCO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 4.6 x 250 mm	ea.
BSE1JCO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 21.2 x 150 mm	ea.
BSE1JCO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 21.2 x 250 mm	ea.
BSE1JCO-1530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 30.0 x 150 mm	ea.
BSE1JCO-2530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 30.0 x 250 mm	ea.
BSE1JCO-1550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 50.0 x 150 mm	ea.
BSE1JCO-2550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 10 µm, 50.0 x 250 mm	ea.
BSE1KCO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 4.6 x 150 mm	ea.
BSE1KCO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 4.6 x 250 mm	ea.
BSE1KCO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 21.2 x 150 mm	ea.
BSE1KCO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 21.2 x 250 mm	ea.
BSE1KCO-1530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 30.0 x 150 mm	ea.
BSE1KCO-2530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 30.0 x 250 mm	ea.
BSE1KCO-1550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 50.0 x 150 mm	ea.
BSE1KCO-2550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 15 µm, 50.0 x 250 mm	ea.
BSE1ACO-1505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 4.6 x 150 mm	ea.
BSE1ACO-2505	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 4.6 x 250 mm	ea.
BSE1ACO-1520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 21.2 x 150 mm	ea.
BSE1ACO-2520	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 21.2 x 250 mm	ea.
BSE1ACO-1530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 30.0 x 150 mm	ea.
BSE1ACO-2530	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 30.0 x 250 mm	ea.
BSE1ACO-1550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 50.0 x 150 mm	ea.
BSE1ACO-2550	BGB Scorpion HPLC Column, C18e-HP 100 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 115

BGB Aquarius C18AQ (Polar Endcapped)

	Phase:	Spherical Ultra-Pure C18 monomeric bonded polar endcapped			
	Particle Size:	5 µm	10 µm	15 µm	30 µm
	Pore Size:	100 Å	100 Å	100 Å	100 Å
	Surface Area:	320 m ² /g	320 m ² /g	320 m ² /g	320 m ² /g
	Endcapped:	yes	yes	yes	yes
	Carbon Load:	10 %	10 %	10 %	10 %
	pH Range:	2–8	2–8	2–8	2–8




BGB Aquarius C18AQ Flash Cartridges

Part No.	Description	Qty.
BAC5KF-W004	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 5.4 g	pk.2
BAC5KF-W012	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 20 g	ea.
BAC5KF-W025	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 33 g	ea.
BAC5KF-W040	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 48 g	ea.
BAC5KF-W080	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 105 g	ea.
BAC5KF-W120	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 155 g	ea.
BAC5KF-W220	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 290 g	ea. ⚠
BAC5KF-W330	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 410 g	ea. ⚠
BAC5KF-S0800	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 1.05 kg	ea. ⚠
BAC5KF-S1600	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 2.09 kg	ea. ⚠
BAC5KF-S3000	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 15 µm, 3.75 kg	ea. ⚠



Part No.	Description	Qty.
BAC5AF-W004	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 5.4 g	pk.2
BAC5AF-W012	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 20 g	ea.
BAC5AF-W025	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 33 g	ea.
BAC5AF-W040	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 48 g	ea.
BAC5AF-W080	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 105 g	ea.
BAC5AF-W120	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 155 g	ea.
BAC5AF-W220	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BAC5AF-W330	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 420 g	ea. ⚠
BAC5AF-S0800	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 1.08 kg	ea. ⚠
BAC5AF-S1600	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 2.14 kg	ea. ⚠
BAC5AF-S3000	BGB Aquarius Flash Cartridge, C18AQ 100 Å, Spherical 30 µm, 3.83 kg	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Aquarius C18AQ Bulk Material

Part No.	Description	Qty.
BAC5IB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 5 µm, 100 g	ea.
BAC5IB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 5 µm, 1 kg	ea.
BAC5JB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 10 µm, 100 g	ea.
BAC5JB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 10 µm, 1 kg	ea.
BAC5KB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 15 µm, 100 g	ea.
BAC5KB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 15 µm, 1 kg	ea.
BAC5AB-K1	BGB Aquarius Bulk Material, C18AQ 100 Å, 30 µm, 100 g	ea.
BAC5AB-K4	BGB Aquarius Bulk Material, C18AQ 100 Å, 30 µm, 1 kg	ea.



BGB Aquarius C18AQ HPLC Columns

Part No.	Description	Qty.
BAC5ICO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 4.6 x 150 mm	ea.
BAC5ICO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 4.6 x 250 mm	ea.
BAC5ICO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 21.2 x 150 mm	ea.
BAC5ICO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 5 µm, 21.2 x 250 mm	ea.
BAC5JCO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 4.6 x 150 mm	ea.
BAC5JCO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 4.6 x 250 mm	ea.
BAC5JCO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 21.2 x 150 mm	ea.
BAC5JCO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 21.2 x 250 mm	ea.
BAC5JCO-1530	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 30.0 x 150 mm	ea.
BAC5JCO-2530	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 30.0 x 250 mm	ea.
BAC5JCO-1550	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 50.0 x 150 mm	ea.
BAC5JCO-2550	BGB Aquarius HPLC Column, C18AQ 100 Å, 10 µm, 50.0 x 250 mm	ea.
BAC5KCO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 4.6 x 150 mm	ea.
BAC5KCO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 4.6 x 250 mm	ea.
BAC5KCO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 21.2 x 150 mm	ea.
BAC5KCO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 21.2 x 250 mm	ea.
BAC5KCO-1530	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 30.0 x 150 mm	ea.
BAC5KCO-2530	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 30.0 x 250 mm	ea.
BAC5KCO-1550	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 50.0 x 150 mm	ea.
BAC5KCO-2550	BGB Aquarius HPLC Column, C18AQ 100 Å, 15 µm, 50.0 x 250 mm	ea.
BAC5ACO-1505	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 4.6 x 150 mm	ea.
BAC5ACO-2505	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 4.6 x 250 mm	ea.
BAC5ACO-1520	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 21.2 x 150 mm	ea.
BAC5ACO-2520	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 21.2 x 250 mm	ea.
BAC5ACO-1530	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 30.0 x 150 mm	ea.
BAC5ACO-2530	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 30.0 x 250 mm	ea.
BAC5ACO-1550	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 50.0 x 150 mm	ea.
BAC5ACO-2550	BGB Aquarius HPLC Column, C18AQ 100 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 115

BGB Taurus C18T Wide Pore



Phase:	Spherical Ultra-Pure Wide Pore C18 polymeric bonded			
Particle Size:	5 µm	10 µm	15 µm	30 µm
Pore Size:	300 Å	300 Å	300 Å	300 Å
Surface Area:	90 m ² /g	90 m ² /g	90 m ² /g	90 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	10 %	10 %	10 %	10 %
pH Range:	1.5–7	1.5–7	1.5–7	1.5–7




BGB Taurus C18T Flash Cartridges

Part No.	Description	Qty.
BTW6KF-W004	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 4.5 g	pk.2
BTW6KF-W012	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 16 g	ea.
BTW6KF-W025	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 26 g	ea.
BTW6KF-W040	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 38 g	ea.
BTW6KF-W080	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 82 g	ea.
BTW6KF-W120	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 120 g	ea.
BTW6KF-W220	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 225 g	ea. ⚠
BTW6KF-W330	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 15 µm, 320 g	ea. ⚠



Part No.	Description	Qty.
BTW6AF-W004	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 4.5 g	pk.2
BTW6AF-W012	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 16 g	ea.
BTW6AF-W025	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 26 g	ea.
BTW6AF-W040	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 38 g	ea.
BTW6AF-W080	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 82 g	ea.
BTW6AF-W120	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 120 g	ea.
BTW6AF-W220	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 225 g	ea. ⚠
BTW6AF-W330	BGB Taurus Flash Cartridge, C18T 300 Å, Spherical 30 µm, 320 g	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Taurus C18T Bulk Material

Part No.	Description	Qty.
BTW6IB-K1	BGB Taurus Bulk Material, C18T 300 Å, 5 µm, 100 g	ea.
BTW6IB-K4	BGB Taurus Bulk Material, C18T 300 Å, 5 µm, 1 kg	ea.
BTW6JB-K1	BGB Taurus Bulk Material, C18T 300 Å, 10 µm, 100 g	ea.
BTW6JB-K4	BGB Taurus Bulk Material, C18T 300 Å, 10 µm, 1 kg	ea.
BTW6KB-K1	BGB Taurus Bulk Material, C18T 300 Å, 15 µm, 100 g	ea.
BTW6KB-K4	BGB Taurus Bulk Material, C18T 300 Å, 15 µm, 1 kg	ea.
BTW6AB-K1	BGB Taurus Bulk Material, C18T 300 Å, 30 µm, 100 g	ea.
BTW6AB-K4	BGB Taurus Bulk Material, C18T 300 Å, 30 µm, 1 kg	ea.




BGB Taurus C18T HPLC Columns

Part No.	Description	Qty.
BTW6ICO-1505	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 4.6 x 150 mm	ea.
BTW6ICO-2505	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 4.6 x 250 mm	ea.
BTW6ICO-1520	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 21.2 x 150 mm	ea.
BTW6ICO-2520	BGB Taurus HPLC Column, C18T 300 Å, 5 µm, 21.2 x 250 mm	ea.
BTW6JCO-1505	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 4.6 x 150 mm	ea.
BTW6JCO-2505	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 4.6 x 250 mm	ea.
BTW6JCO-1520	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 21.2 x 150 mm	ea.
BTW6JCO-2520	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 21.2 x 250 mm	ea.
BTW6JCO-1530	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 30.0 x 150 mm	ea.
BTW6JCO-2530	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 30.0 x 250 mm	ea.
BTW6JCO-1550	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 50.0 x 150 mm	ea.
BTW6JCO-2550	BGB Taurus HPLC Column, C18T 300 Å, 10 µm, 50.0 x 250 mm	ea.
BTW6KCO-1505	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 4.6 x 150 mm	ea.
BTW6KCO-2505	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 4.6 x 250 mm	ea.
BTW6KCO-1520	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 21.2 x 150 mm	ea.
BTW6KCO-2520	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 21.2 x 250 mm	ea.
BTW6KCO-1530	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 30.0 x 150 mm	ea.
BTW6KCO-2530	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 30.0 x 250 mm	ea.
BTW6KCO-1550	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 50.0 x 150 mm	ea.
BTW6KCO-2550	BGB Taurus HPLC Column, C18T 300 Å, 15 µm, 50.0 x 250 mm	ea.
BTW6ACO-1505	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 4.6 x 150 mm	ea.
BTW6ACO-2505	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 4.6 x 250 mm	ea.
BTW6ACO-1520	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 21.2 x 150 mm	ea.
BTW6ACO-2520	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 21.2 x 250 mm	ea.
BTW6ACO-1530	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 30.0 x 150 mm	ea.
BTW6ACO-2530	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 30.0 x 250 mm	ea.
BTW6ACO-1550	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 50.0 x 150 mm	ea.
BTW6ACO-2550	BGB Taurus HPLC Column, C18T 300 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 115

BGB Taurus C8T Wide Pore



Phase:	Spherical Ultra-Pure Wide Pore C8 polymeric bonded			
Particle Size:	5 µm	10 µm	15 µm	30 µm
Pore Size:	300 Å	300 Å	300 Å	300 Å
Surface Area:	90 m ² /g	90 m ² /g	90 m ² /g	90 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	5 %	5 %	5 %	5 %
pH Range:	1.5–7	1.5–7	1.5–7	1.5–7



BGB Taurus C8T Flash Cartridges

Part No.	Description	Qty.
BTW0KF-W004	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 4.5 g	pk.2
BTW0KF-W012	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 16 g	ea.
BTW0KF-W025	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 26 g	ea.
BTW0KF-W040	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 38 g	ea.
BTW0KF-W080	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 82 g	ea.
BTW0KF-W120	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 120 g	ea.
BTW0KF-W220	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 225 g	ea. ⚠
BTW0KF-W330	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 15 µm, 320 g	ea. ⚠



Part No.	Description	Qty.
BTW0AF-W004	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 4.5 g	pk.2
BTW0AF-W012	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 16 g	ea.
BTW0AF-W025	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 26 g	ea.
BTW0AF-W040	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 38 g	ea.
BTW0AF-W080	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 82 g	ea.
BTW0AF-W120	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 120 g	ea.
BTW0AF-W220	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 225 g	ea. ⚠
BTW0AF-W330	BGB Taurus Flash Cartridge, C8T 300 Å, Spherical 30 µm, 320 g	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Taurus C8T Bulk Material

Part No.	Description	Qty.
BTW0IB-K1	BGB Taurus Bulk Material, C8T 300 Å, 5 µm, 100 g	ea.
BTW0IB-K4	BGB Taurus Bulk Material, C8T 300 Å, 5 µm, 1 kg	ea.
BTW0JB-K1	BGB Taurus Bulk Material, C8T 300 Å, 10 µm, 100 g	ea.
BTW0JB-K4	BGB Taurus Bulk Material, C8T 300 Å, 10 µm, 1 kg	ea.
BTW0KB-K1	BGB Taurus Bulk Material, C8T 300 Å, 15 µm, 100 g	ea.
BTW0KB-K4	BGB Taurus Bulk Material, C8T 300 Å, 15 µm, 1 kg	ea.
BTW0AB-K1	BGB Taurus Bulk Material, C8T 300 Å, 30 µm, 100 g	ea.
BTW0AB-K4	BGB Taurus Bulk Material, C8T 300 Å, 30 µm, 1 kg	ea.




BGB Taurus C8T HPLC Columns

Part No.	Description	Qty.
BTW0ICO-1505	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 4.6 x 150 mm	ea.
BTW0ICO-2505	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 4.6 x 250 mm	ea.
BTW0ICO-1520	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 21.2 x 150 mm	ea.
BTW0ICO-2520	BGB Taurus HPLC Column, C8T 300 Å, 5 µm, 21.2 x 250 mm	ea.
BTW0JCO-1505	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 4.6 x 150 mm	ea.
BTW0JCO-2505	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 4.6 x 250 mm	ea.
BTW0JCO-1520	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 21.2 x 150 mm	ea.
BTW0JCO-2520	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 21.2 x 250 mm	ea.
BTW0JCO-1530	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 30.0 x 150 mm	ea.
BTW0JCO-2530	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 30.0 x 250 mm	ea.
BTW0JCO-1550	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 50.0 x 150 mm	ea.
BTW0JCO-2550	BGB Taurus HPLC Column, C8T 300 Å, 10 µm, 50.0 x 250 mm	ea.
BTW0KCO-1505	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 4.6 x 150 mm	ea.
BTW0KCO-2505	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 4.6 x 250 mm	ea.
BTW0KCO-1520	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 21.2 x 150 mm	ea.
BTW0KCO-2520	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 21.2 x 250 mm	ea.
BTW0KCO-1530	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 30.0 x 150 mm	ea.
BTW0KCO-2530	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 30.0 x 250 mm	ea.
BTW0KCO-1550	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 50.0 x 150 mm	ea.
BTW0KCO-2550	BGB Taurus HPLC Column, C8T 300 Å, 15 µm, 50.0 x 250 mm	ea.
BTW0ACO-1505	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 4.6 x 150 mm	ea.
BTW0ACO-2505	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 4.6 x 250 mm	ea.
BTW0ACO-1520	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 21.2 x 150 mm	ea.
BTW0ACO-2520	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 21.2 x 250 mm	ea.
BTW0ACO-1530	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 30.0 x 150 mm	ea.
BTW0ACO-2530	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 30.0 x 250 mm	ea.
BTW0ACO-1550	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 50.0 x 150 mm	ea.
BTW0ACO-2550	BGB Taurus HPLC Column, C8T 300 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 115

BGB Taurus C4T Wide Pore



Phase:	Spherical Ultra-Pure Wide Pore C4 polymeric bonded			
Particle Size:	5 µm	10 µm	15 µm	30 µm
Pore Size:	300 Å	300 Å	300 Å	300 Å
Surface Area:	90 m ² /g	90 m ² /g	90 m ² /g	90 m ² /g
Endcapped:	yes	yes	yes	yes
Carbon Load:	3 %	3 %	3 %	3 %
pH Range:	1.5–7	1.5–7	1.5–7	1.5–7



BGB Taurus C4T Flash Cartridges

Part No.	Description	Qty.
BTW1KF-W004	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 4.5 g	pk.2
BTW1KF-W012	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 16 g	ea.
BTW1KF-W025	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 26 g	ea.
BTW1KF-W040	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 38 g	ea.
BTW1KF-W080	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 82 g	ea.
BTW1KF-W120	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 120 g	ea.
BTW1KF-W220	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 225 g	ea. ⚠
BTW1KF-W330	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 15 µm, 320 g	ea. ⚠



Part No.	Description	Qty.
BTW1AF-W004	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 4.5 g	pk.2
BTW1AF-W012	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 16 g	ea.
BTW1AF-W025	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 26 g	ea.
BTW1AF-W040	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 38 g	ea.
BTW1AF-W080	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 82 g	ea.
BTW1AF-W120	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 120 g	ea.
BTW1AF-W220	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 225 g	ea. ⚠
BTW1AF-W330	BGB Taurus Flash Cartridge, C4T 300 Å, Spherical 30 µm, 320 g	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Taurus C4T Bulk Material

Part No.	Description	Qty.
BTW1IB-K1	BGB Taurus Bulk Material, C4T 300 Å, 5 µm, 100 g	ea.
BTW1IB-K4	BGB Taurus Bulk Material, C4T 300 Å, 5 µm, 1 kg	ea.
BTW1JB-K1	BGB Taurus Bulk Material, C4T 300 Å, 10 µm, 100 g	ea.
BTW1JB-K4	BGB Taurus Bulk Material, C4T 300 Å, 10 µm, 1 kg	ea.
BTW1KB-K1	BGB Taurus Bulk Material, C4T 300 Å, 15 µm, 100 g	ea.
BTW1KB-K4	BGB Taurus Bulk Material, C4T 300 Å, 15 µm, 1 kg	ea.
BTW1AB-K1	BGB Taurus Bulk Material, C4T 300 Å, 30 µm, 100 g	ea.
BTW1AB-K4	BGB Taurus Bulk Material, C4T 300 Å, 30 µm, 1 kg	ea.




BGB Taurus C4T HPLC Columns

Part No.	Description	Qty.
BTW1ICO-1505	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 4.6 x 150 mm	ea.
BTW1ICO-2505	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 4.6 x 250 mm	ea.
BTW1ICO-1520	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 21.2 x 150 mm	ea.
BTW1ICO-2520	BGB Taurus HPLC Column, C4T 300 Å, 5 µm, 21.2 x 250 mm	ea.
BTW1JCO-1505	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 4.6 x 150 mm	ea.
BTW1JCO-2505	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 4.6 x 250 mm	ea.
BTW1JCO-1520	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 21.2 x 150 mm	ea.
BTW1JCO-2520	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 21.2 x 250 mm	ea.
BTW1JCO-1530	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 30.0 x 150 mm	ea.
BTW1JCO-2530	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 30.0 x 250 mm	ea.
BTW1JCO-1550	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 50.0 x 150 mm	ea.
BTW1JCO-2550	BGB Taurus HPLC Column, C4T 300 Å, 10 µm, 50.0 x 250 mm	ea.
BTW1KCO-1505	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 4.6 x 150 mm	ea.
BTW1KCO-2505	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 4.6 x 250 mm	ea.
BTW1KCO-1520	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 21.2 x 150 mm	ea.
BTW1KCO-2520	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 21.2 x 250 mm	ea.
BTW1KCO-1530	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 30.0 x 150 mm	ea.
BTW1KCO-2530	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 30.0 x 250 mm	ea.
BTW1KCO-1550	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 50.0 x 150 mm	ea.
BTW1KCO-2550	BGB Taurus HPLC Column, C4T 300 Å, 15 µm, 50.0 x 250 mm	ea.
BTW1ACO-1505	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 4.6 x 150 mm	ea.
BTW1ACO-2505	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 4.6 x 250 mm	ea.
BTW1ACO-1520	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 21.2 x 150 mm	ea.
BTW1ACO-2520	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 21.2 x 250 mm	ea.
BTW1ACO-1530	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 30.0 x 150 mm	ea.
BTW1ACO-2530	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 30.0 x 250 mm	ea.
BTW1ACO-1550	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 50.0 x 150 mm	ea.
BTW1ACO-2550	BGB Taurus HPLC Column, C4T 300 Å, 30 µm, 50.0 x 250 mm	ea.



Empty Flash column hardware
see page 115

BGB Scorpius Cyano and Diol




Phase:	Spherical Ultra-Pure Cyano (CN) bonded
Particle Size:	30 µm
Pore Size:	100 Å
Surface Area:	320 m ² /g
Endcapped:	yes
Carbon Load:	5.5 %
pH Range:	2–8



BGB Scorpius Cyano (CN) Flash Cartridges

Part No.	Description	Qty.
BSCNAF-W004	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 5.4 g	pk.2
BSCNAF-W012	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 20 g	ea.
BSCNAF-W025	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 33 g	ea.
BSCNAF-W040	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 48 g	ea.
BSCNAF-W080	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 105 g	ea.
BSCNAF-W120	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 155 g	ea.
BSCNAF-W220	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BSCNAF-W330	BGB Scorpius Flash Cartridge, Cyano (CN) 100 Å, Spherical 30 µm, 420 g	ea. ⚠



Phase:	Spherical Ultra-Pure Diol bonded
Particle Size:	30 µm
Pore Size:	100 Å
Surface Area:	320 m ² /g
Endcapped:	yes
Carbon Load:	5 %
pH Range:	2–8




BGB Scorpius Diol (OH) Flash Cartridges

Part No.	Description	Qty.
BSOHAF-W004	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 5.4 g	pk.2
BSOHAF-W012	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 20 g	ea.
BSOHAF-W025	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 33 g	ea.
BSOHAF-W040	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 48 g	ea.
BSOHAF-W080	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 105 g	ea.
BSOHAF-W120	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 155 g	ea.
BSOHAF-W220	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BSOHAF-W330	BGB Scorpius Flash Cartridge, Diol (OH) 100 Å, Spherical 30 µm, 420 g	ea. ⚠



⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Scorpion Amino



Phase:	Irregular Ultra-Pure Amino bonded
Particle Size:	50 µm
Pore Size:	60 Å
Surface Area:	500 m ² /g
Endcapped:	yes
Carbon Load:	5 %
pH Range:	2–8



BGB Scorpion Amino (NH₂) Flash Cartridges

Part No.	Description	Qty.
BSNHAF-W004	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 5.9 g	pk.2
BSNHAF-W012	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 23 g	ea.
BSNHAF-W025	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 38 g	ea.
BSNHAF-W040	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 55 g	ea.
BSNHAF-W080	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 122 g	ea.
BSNHAF-W120	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 180 g	ea.
BSNHAF-W220	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 340 g	ea. ⚠
BSNHAF-W330	BGB Scorpion Flash Cartridge, Amino (NH ₂) 60 Å, Irregular 50 µm (40–63 µm), 475 g	ea. ⚠



⚠ **ATTENTION:** It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

Luer Adapter Kit




These adapters (stainless steel Luer Lock inlet and PEEK Luer outlet) have to be used with BGB column hardware S800, S1600 and S3000. They can be connected to any kind of Luer connection.

Part No.	Description	Qty.
BSLK	BGB Luer adapter kit (inlet & outlet) for S800, S1600 and S3000 cartridge hardware	ea.



Empty Flash column hardware
see page 115

BGB Aquarius HILIC-D and HILIC-ARG


	Phase:	Spherical Ultra-Pure proprietary bonded
	Particle Size:	30 µm
	Pore Size:	100 Å
	Surface Area:	320 m ² /g
	Endcapped:	yes
	Carbon Load:	5 %
	pH Range:	2–8



BGB Aquarius HILIC-D Flash Cartridges

Part No.	Description	Qty.
BAHDAF-W004	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 5.4 g	pk.2
BAHDAF-W012	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 20 g	ea.
BAHDAF-W025	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 33 g	ea.
BAHDAF-W040	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 48 g	ea.
BAHDAF-W080	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 105 g	ea.
BAHDAF-W120	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 155 g	ea.
BAHDAF-W220	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BAHDAF-W330	BGB Aquarius Flash Cartridge, HILIC-D 100 Å, Spherical 30 µm, 420 g	ea. ⚠



	Phase:	Spherical Ultra-Pure Arginine Bonded Silica
	Particle Size:	30 µm
	Pore Size:	100 Å
	Surface Area:	320 m ² /g
	Endcapped:	yes
	Carbon Load:	8 %
	pH Range:	2–8



BGB Aquarius HILIC-ARG Flash Cartridges

Part No.	Description	Qty.
BAHAAF-W004	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 5.4 g	pk.2
BAHAAF-W012	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 20 g	ea.
BAHAAF-W025	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 33 g	ea.
BAHAAF-W040	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 48 g	ea.
BAHAAF-W080	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 105 g	ea.
BAHAAF-W120	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 155 g	ea.
BAHAAF-W220	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 300 g	ea. ⚠
BAHAAF-W330	BGB Aquarius Flash Cartridge, HILIC-ARG 100 Å, Spherical 30 µm, 420 g	ea. ⚠



⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Scorpion Alumina Acidic, Basic and Neutral



Phase:	Irregular Ultra-Pure Alumina
Particle Size:	60 µm
Pore Size:	55 Å
Surface Area:	155 m ² /g
Endcapped:	n.a.
Carbon Load:	n.a.




BGB Scorpion Alumina Acidic Flash Cartridges

Part No.	Description	Qty.
BSAADF-W004	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 8 g	pk.20
BSAADF-W012	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 24 g	pk.18
BSAADF-W025	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 50 g	pk.12
BSAADF-W040	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 80 g	pk.12
BSAADF-W080	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 160 g	pk.10
BSAADF-W120	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 240 g	pk.10
BSAADF-W220	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 440 g	pk.6 ⚠
BSAADF-W330	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 660 g	pk.5 ⚠
BSAADF-S0800	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 1.6 kg	ea. ⚠
BSAADF-S1600	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 3.2 kg	ea. ⚠
BSAADF-S3000	BGB Scorpion Flash Cart., Alumina Acidic 55 Å, Irregular 60 µm (50-75 µm), 6 kg,	ea. ⚠



BGB Scorpion Alumina Basic Flash Cartridges

Part No.	Description	Qty.
BSABDF-W004	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 8 g	pk.20
BSABDF-W012	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 24 g	pk.18
BSABDF-W025	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 50 g	pk.12
BSABDF-W040	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 80 g	pk.12
BSABDF-W080	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 160 g	pk.10
BSABDF-W120	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 240 g	pk.10
BSABDF-W220	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 440 g	pk.6 ⚠
BSABDF-W330	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 660 g	pk.5 ⚠
BSABDF-S0800	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 1.6 kg	ea. ⚠
BSABDF-S1600	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 3.2 kg	ea. ⚠
BSABDF-S3000	BGB Scorpion Flash Cart., Alumina Basic 55 Å, Irregular 60 µm (50-75 µm), 6 kg,	ea. ⚠



BGB Scorpion Alumina Neutral Flash Cartridges

Part No.	Description	Qty.
BSANDF-W004	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 8 g	pk.20
BSANDF-W012	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 24 g	pk.18
BSANDF-W025	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 50 g	pk.12
BSANDF-W040	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 80 g	pk.12
BSANDF-W080	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 160 g	pk.10
BSANDF-W120	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 240 g	pk.10
BSANDF-W220	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 440 g	pk.6 ⚠
BSANDF-W330	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 660 g	pk.5 ⚠
BSANDF-S0800	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 1.6 kg	ea. ⚠
BSANDF-S1600	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 3.2 kg	ea. ⚠
BSANDF-S3000	BGB Scorpion Flash Cart., Alumina Neutral 55 Å, Irregular 60 µm (50-75 µm), 6 kg,	ea. ⚠



⚠ ATTENTION: It is recommended to set the flow rate at 50–60 % of the suggested flow rate in column equilibration process to avoid obvious thermal effect and frit blocking.

BGB Empty Cartridges and Frits

BGB EZPack empty Flash Cartridges offer users convenience for self column packing but are also suitable for solid injection. In case of miscibility problems of compounds, this technic, also called dry load, is commonly used by chemists.

As for the complete range of BGB Flash Cartridges, BGB EZPack empty Flash Cartridges are done with an extra wall thickness. Reinforced body allows to work safely at higher pressure and ensure that the column is able to withstand the pressure capability of modern flash systems.


- Body in pharmaceutical-grade polypropylene
- Reinforced cartridge, pressure up to 13.8 bar (200 psi)
- Luer/Luer Lock connectors are compatible with most flash chromatography systems
- Flexible sample loading



Hardware Parameters

Hardware Type	Inner Diameter	Bed Length	Max. Pressure	Top Frit	Bottom Frit*
S0004	12.8 mm	60 mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0012	21.4 mm	76 mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0025	21.6 mm	126 mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0040	26.8 mm	125 mm	13.8 bar (200 psi)	16–20 µm	16–20 µm
S0060	36.6 mm	99 mm	13.8 bar (200 psi)	20–25 µm	20–25 µm
S0080	31.2 mm	193 mm	13.8 bar (200 psi)	20–25 µm	20–25 µm
S0100	60.4 mm	61 mm	10.3 bar (150 psi)	20–25 µm	20–25 µm
S0120	36.6 mm	204 mm	13.8 bar (200 psi)	20–25 µm	20–25 µm
S0220	60.6 mm	131 mm	10.3 bar (150 psi)	20–25 µm	20–25 µm
S0330	60.6 mm	187 mm	10.3 bar (150 psi)	20–25 µm	20–25 µm

* All frits are made of polyethylene (PE).

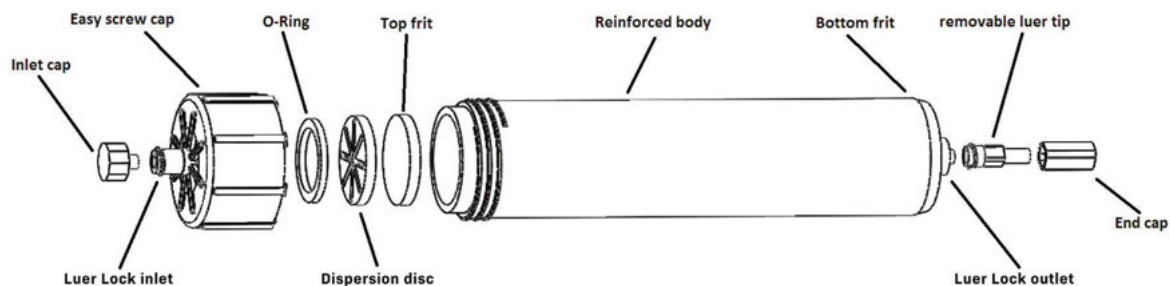

BGB EZPak empty Flash Cartridges

Part No.	Description	Qty.
BDL000F-S0004	BGB EZPak empty cartridges with O-ring and frits, 4g	pk.20
BDL000F-S0012	BGB EZPak empty cartridges with O-ring and frits, 12g	pk.18
BDL000F-S0025	BGB EZPak empty cartridges with O-ring and frits, 25g	pk.12
BDL000F-S0040	BGB EZPak empty cartridges with O-ring and frits, 40g	pk.12
BDL000F-S0060	BGB EZPak empty cartridges with O-ring and frits, 60g	pk.12
BDL000F-S0080	BGB EZPak empty cartridges with O-ring and frits, 80g	pk.10
BDL000F-S0100	BGB EZPak empty cartridges with O-ring and frits, 100g	pk.6
BDL000F-S0120	BGB EZPak empty cartridges with O-ring and frits, 120g	pk.10
BDL000F-S0220	BGB EZPak empty cartridges with O-ring and frits, 220g	pk.6
BDL000F-S0330	BGB EZPak empty cartridges with O-ring and frits, 330g	pk.5



BGB EZPak top and bottom Frits*



Part No.	Description	Qty.
BTFEZPPE-S0004	BGB Top frits for 4 g EZPak empty cartridges	pk.100
BTFEZPPE-S0012	BGB Top frits for 12 g EZPak empty cartridges	pk.100
BTFEZPPE-S0025	BGB Top frits for 25 g EZPak empty cartridges	pk.100
BTFEZPPE-S0040	BGB Top frits for 40 g EZPak empty cartridges	pk.100
BTFEZPPE-S0060	BGB Top frits for 60 g EZPak empty cartridges	pk.30
BTFEZPPE-S0080	BGB Top frits for 80 g EZPak empty cartridges	pk.30
BTFEZPPE-S0100	BGB Top frits for 100g EZPak empty cartridges	pk.30
BTFEZPPE-S0120	BGB Top frits for 120g EZPak empty cartridges	pk.30
BTFEZPPE-S0220	BGB Top frits for 220g EZPak empty cartridges	pk.30
BTFEZPPE-S0330	BGB Top frits for 330g EZPak empty cartridges	pk.30

Part No.	Description	Qty.
BBFEZPPE-S0004	BGB Bottom frits for 4 g EZPak empty cartridges	pk.100
BBFEZPPE-S0012	BGB Bottom frits for 12 g EZPak empty cartridges	pk.100
BBFEZPPE-S0025	BGB Bottom frits for 25 g EZPak empty cartridges	pk.100
BBFEZPPE-S0040	BGB Bottom frits for 40 g EZPak empty cartridges	pk.100
BBFEZPPE-S0060	BGB Bottom frits for 60 g EZPak empty cartridges	pk.30
BBFEZPPE-S0080	BGB Bottom frits for 80 g EZPak empty cartridges	pk.30
BBFEZPPE-S0100	BGB Bottom frits for 100g EZPak empty cartridges	pk.30
BBFEZPPE-S0120	BGB Bottom frits for 120g EZPak empty cartridges	pk.30
BBFEZPPE-S0220	BGB Bottom frits for 220g EZPak empty cartridges	pk.30
BBFEZPPE-S0330	BGB Bottom frits for 330g EZPak empty cartridges	pk.30

* All frits are made of polyethylene (PE).

O-Rings and Insertion Tools

BGB EZPack O-Rings, Silicone & FEP



Part No.	Description	Qty.
BOREZPSI-S0004	BGB O-Ring for 4 g EZPak empty cartridges, silicone	pk.100
BOREZPSI-S0012	BGB O-Ring for 12 g EZPak empty cartridges, silicone	pk.100
BOREZPSI-S0025	BGB O-Ring for 25 g EZPak empty cartridges, silicone	pk.100
BOREZPSI-S0040	BGB O-Ring for 40 g EZPak empty cartridges, silicone	pk.100
BOREZPSI-S0060	BGB O-Ring for 60 g EZPak empty cartridges, silicone	pk.30
BOREZPSI-S0080	BGB O-Ring for 80 g EZPak empty cartridges, silicone	pk.30
BOREZPSI-S0100	BGB O-Ring for 100 g EZPak empty cartridges, silicone	pk.30
BOREZPSI-S0120	BGB O-Ring for 120 g EZPak empty cartridges, silicone	pk.30
BOREZPSI-S0220	BGB O-Ring for 220 g EZPak empty cartridges, silicone	pk.30
BOREZPSI-S0330	BGB O-Ring for 330 g EZPak empty cartridges, silicone	pk.30



Part No.	Description	Qty.
BOREZPFEP-S0004	BGB O-Ring for 4 g EZPak empty cartridges, FEP	pk.50
BOREZPFEP-S0012	BGB O-Ring for 12 g EZPak empty cartridges, FEP	pk.50
BOREZPFEP-S0025	BGB O-Ring for 25 g EZPak empty cartridges, FEP	pk.50
BOREZPFEP-S0040	BGB O-Ring for 40 g EZPak empty cartridges, FEP	pk.50
BOREZPFEP-S0060	BGB O-Ring for 60 g EZPak empty cartridges, FEP	pk.20
BOREZPFEP-S0080	BGB O-Ring for 80 g EZPak empty cartridges, FEP	pk.20
BOREZPFEP-S0100	BGB O-Ring for 100 g EZPak empty cartridges, FEP	pk.10
BOREZPFEP-S0120	BGB O-Ring for 120 g EZPak empty cartridges, FEP	pk.20
BOREZPFEP-S0220	BGB O-Ring for 220 g EZPak empty cartridges, FEP	pk.10
BOREZPFEP-S0330	BGB O-Ring for 330 g EZPak empty cartridges, FEP	pk.10

Frit Insertion Tools



Part No.	Description	Qty.
BDL000TO-001	Frit Insertion Tool for type S0004	ea.
BDL000TO-002	Frit Insertion Tool for type S0012, S0025 and S0040	ea.
BDL000TO-003	Frit Insertion Tool for type S0060, S0080 and S0120	ea.
BDL000TO-004	Frit Insertion Tool for type S0100, S0220 and S0330	ea.

Trademarks of Other Manufacturers

The trademarks listed below and referred to herein are the property of the corresponding listed entities.

Advanced Green 3	Chromatography Research Supplies	Nano Filter Vial	Scientific Plastic Products, Inc.
Agilent	Agilent Technologies, Inc.	Nylon 66	E.I. du Pont de Nemours and Company
Alltech	Alltech Associates, Inc.	PAL	CTC Analytics AG
Antec	Antec Leyden B.V.	PEEK	Victrex plc
CTC Analytics	CTC Analytics AG	PerfectPeak	Mott Corporation
Delrin	E.I. du Pont de Nemours and Company	PerkinElmer	PerkinElmer, Inc.
DIN	Deutsches Institut für Normung e.V.	Polymicro	Molex, LLC, USA
DIONEX	Dionex Co.	PTFE	E.I. du Pont de Nemours and Company
DuPont	E.I. du Pont de Nemours and Company	Pyrex	Dow Corning
EPA	European Patent Organisation	Septa BTO	Chromatography Research Supplies
FocusLiner	SGE, Incorporated	SGE	SGE, Inc.
GRACE	W.R. Grace & Co.-Conn.	Shimadzu	Shimadzu Co.
Hamilton	Hamilton Co.	SINGLE StEP	Scientific Plastic Products, Inc.
L-Mark	LMK Properties Limited	Spark Holland	Spark Holland B.V.
Marathon	Chromatography Research Supplies	Swagelok	Swagelok Co.
MEGA FV	Scientific Plastic Products, Inc.	Teflon	The Chemours Company FC
Merlin MicroSeal	Merlin Instrument Company	Thermo Scientific	Thermo Fischer Scientific, Inc.
MICROLITER	Hamilton Co.	Vespel	E.I. du Pont de Nemours and Company
Mininert	Valco Instruments Co.	Viton	The Chemours Company FC
NALGENE	Nalge Nunc International Co.		

This trademark list has been compiled using available published information as of the publication date of this brochure and may not accurately reflect current trademark ownership. All other trademarks appearing in BGB® literature or on its website are the property of their respective owners. For more trademarks visit www.bgb-info.com/trademarks.

Acronyms

AS	Autosampler	GC	Gas Chromatography	PI	Polyimide
BTO	Bleed and Temperature Optimized	GF	Glass Fiber	POM	Polyoxymethylene, Polyacetal
CA	Cellulose Acetate	HPLC	High Pressure Liquid Chromatography	PP	Polypropylene
CE	Capillary Electrophoresis	IC	Ion Chromatography	PPS	Polyphenylene sulfide
CME	Cellulose Mixed Esters	ID	Inner Diameter	PTFE	Polytetrafluoroethylene
CO ₂	Carbon Dioxide	LC	Liquid Chromatography	PTV	Programmed Temperature Vaporizer
CTFE	Chlorotrifluoroethylene	LT	Luer Tip	PVDF	Polyvinylidene difluoride
DIN	Deutsche Industry Norm	MS	Mass Spectrometry	RC	Regenerated Cellulose
EPA	Environmental Protection Agency	OD	Outer Diameter	RN	Removable Needle
EPDM	Ethylene Propylene Diene Monomer	PA	Polyamide	Silicone	Polysiloxane
ETFE	Ethyltrifluoroethylene	PE	Polyethylene	SS	Stainless Steel
FEP	Fluorinated Ethylenepropylene	PE-HD	Polyethylene high density	TPX	Polymethylpentene
FFKM	Perfluorinated Rubber	PEEK	Polyetheretherketone	UGS	Universal Guard System
FN	Fixed Needle	PES	Polyethersulfone		
FS	Fused Silica	PFA	Perfluoroalkoxy		

Part Number Index

11B.....	28	080401-XLWS	37	110504.....	31, 35	200984.....	73
11BI.....	32	080410.....	35	110505.....	31, 35	200985.....	73
11BW	28	080420.....	37	110506.....	31, 34, 38	200986.....	73
11BWS	28	080421.....	37	110507.....	31, 34, 38	201950.....	73
11K	28	080800.....	36	110507-S.....	31, 34, 38	201951.....	73
11KI.....	32	080800-P.....	36	110508.....	31, 35	201970.....	73
11K-ML	32	080800-W.....	36	120200.....	41	201980.....	73
11KS.....	28	080801.....	36	120201.....	41	201981.....	73
11KW	28	080801-W.....	36	120202.....	41	202001.....	75
11SR.....	32	090300.....	38	120204.....	41	202002.....	75
11SRBW	32	090300-B	38	120213.....	41	202010.....	73
11SRBWS.....	32	090300-BN.....	38	120300.....	41	202021.....	75
11SRS	32	090300-G.....	38	120301.....	41	202031.....	75
11SRW	32	090300-GN	38	120302.....	41	211540-3	64
11SRWS.....	32	090300-N.....	38	120313.....	41	211540-10	64
2020LD.....	11	090300-P.....	38	130400.....	40	211540-25	64
2025LD.....	11	090300-PN.....	38	130400-W.....	40	211541-3	64
2032LD.....	11	090300-R	38	130401.....	40	211541-10	64
2053LD.....	11	090300-RN.....	38	130401-W.....	40	211541-25	64
2525LD.....	11	090300-T.....	38	130800.....	41	211600-3	62
2532LD.....	11	090300-TN.....	38	130800-W.....	41	211600-5	62
2553LD.....	11	090300-Y	38	130801.....	41	211600-10	62
3232LD.....	11	090300-YN.....	38	130801-W.....	41	211600-25	62
3253LD.....	11	090301.....	38	150614.....	31, 35	211602-3	62
5353LD.....	11	090301-B	38	150714.....	40	211602-5	62
33333-A.....	17, 25	090301-G.....	38	150715.....	40	211602-10	62
070300.....	36	090301-P.....	38	151142.....	27	211602-25	62
070300-P.....	36	090301-R	38	180300.....	43	211603-3	62
070300-SR.....	36	090301-T.....	38	180301.....	43	211603-5	62
070300-SR-P.....	36	090301-Y	38	180305.....	43	211603-10	62
070301.....	36	090302.....	39	180306.....	43	211603-25	62
070301-P.....	36	090302-B	39	180307.....	43	211604-3	62
070302.....	36	090302-G.....	39	180308.....	43	211604-5	62
070302-P.....	36	090302-P.....	39	180315.....	43	211604-10	62
070313.....	36	090302-R	39	180410.....	42	211604-25	62
070313-P.....	36	090302-T.....	39	180410-B	42	211605-3	62
080200.....	36	090302-Y	39	180420.....	42	211605-5	62
080200-SR.....	36	090304.....	39	180420-B	42	211605-10	62
080201.....	36	090304-B	39	200406.....	42	211605-25	62
080201-R	36	090304-G.....	39	200410-CTC.....	42	211606-3	62
080202.....	36	090304-P.....	39	200410-CTC-B.....	42	211606-5	62
080204.....	36	090304-R	39	200410-FF	42	211606-10	62
080213.....	36	090304-T.....	39	200420.....	42	211606-25	62
080301.....	27	090304-Y	39	200420-B	42	211607-3	62
080302.....	27	090313.....	39	200420-CTC.....	42	211607-5	62
080304.....	27	090313-B	39	200420-CTC-B.....	42	211607-10	62
080310.....	27	090313-G.....	39	200420-CTC-SPME.....	42	211607-25	62
080310-N.....	27	090313-P.....	39	200420-FF	42	211608-3	62
080313.....	27	090313-R	39	200421.....	42	211608-5	62
080400.....	35	090313-T.....	39	200910.....	70	211608-10	62
080400-S.....	35	090313-Y	39	200910-HP.....	71	211608-25	62
080400-W.....	35	110400.....	28	200952.....	71	211609-3	62
080400-XL.....	37	110411.....	29	200953.....	71	211609-5	62
080400-XLS.....	37	110420.....	28	200954.....	71	211609-10	62
080400-XLW	37	110421.....	28	200955.....	71	211609-25	62
080401.....	35	110500.....	31, 35	200972.....	75	211610-3	62
080401-W.....	35	110501.....	31, 35	200973.....	75	211610-5	62
080401-WVS	35	110502.....	31, 34, 38	200980.....	73	211610-10	62
080401-XL.....	37	110503.....	31, 34, 38	200981.....	73	211610-25	62
080401-XLW	37	110503-S.....	31, 34, 38	200982.....	73	211630-3	61

Part Number Index

211631-3	61	211733-3	66	220340.....	75	295024.....	48
211632-3	61	211733-10	66	220341.....	75	295025.....	48
211633-3	61	211734-3	66	220343.....	75	295026.....	48
211634-3	61	211734-10	66	220344.....	72	295027.....	48
211635-3	61	211735-3	66	220345.....	72	295028.....	48
211636-3	61	211735-10	66	220346.....	72	295029.....	48
211637-3	61	211740-3	66	220347.....	72	295061.....	50
211638-3	61	211740-10	66	220348.....	72	295062.....	50
211681-3	63	211750-1	66	220349.....	72	295063.....	50
211681-10	63	211760.....	66	220350.....	72	295064.....	50
211682-3	63	211761.....	66	220351.....	72	295065.....	50
211682-10	63	211906-3	64	220352.....	72	295066.....	50
211683-3	63	211906-10	64	220353.....	72	295067.....	50
211683-10	63	211906-25	64	220354.....	72	295068.....	50
211684-1	63	211925-3	64	220355.....	71	295069.....	50
211690.....	61	211925-5	64	220356.....	71	295070.....	50
211691.....	61	211925-10	64	220357.....	71	295080.....	49
211692.....	61	211925-25	64	220358.....	71	297040.....	31, 49
211693.....	61	211926-3	64	220359.....	71	297041.....	31, 49
211694.....	61	211926-5	64	220364.....	71	297042.....	31, 49
211695.....	61	211926-10	64	220365.....	71	297043.....	31, 49
211696.....	61	211926-25	64	220366.....	70	297044.....	31, 49
211697.....	61	211998-CO2	77	220367.....	70	297045.....	31, 49
211698.....	61	211998-H.....	77	220368.....	70	297046.....	31, 49
211700-3	65	211998-L.....	85	220369.....	70	297047.....	31, 49
211700-10	65	211999.....	85	220370.....	70	297048.....	31, 49
211701-3	65	220300.....	72	220371.....	70	297060.....	50
211701-10	65	220302.....	74	220373.....	72	0800030.....	27
211702-3	65	220303.....	74	220379.....	73	0800035.....	27
211702-10	65	220304.....	74	220380.....	73	08040005.....	27
211703-3	65	220305.....	74	220381.....	73	08040006.....	27
211703-10	65	220306.....	74	220382.....	73	08040007.....	27
211710-3	65	220307.....	74	220384.....	73	08040009.....	27
211710-10	65	220308.....	74	220386.....	73	08040105.....	27
211711-3	65	220312.....	72	220387.....	63	08040106.....	27
211711-10	65	220313.....	74	220388.....	63	08040107.....	27
211712-3	65	220314.....	74	220389.....	63	11030101.....	30
211712-10	65	220315.....	74	220390.....	63	11030101-B	30
211713-3	65	220316.....	74	220400.....	76	11030101-G.....	30
211713-10	65	220317.....	72	220401.....	76	11030101-M	30
211714-3	65	220320.....	74	220402.....	76	11030101-R	30
211714-10	65	220321.....	74	220403.....	76	11030101-Y	30
211715-3	65	220322.....	74	220405.....	76	11030201.....	30
211715-10	65	220323.....	74	220525.....	70	11030201-M	30
211720-3	65	220324.....	74	220545.....	70	11030401.....	30
211720-10	65	220325.....	74	220565.....	70	11031201.....	29
211721-3	65	220326.....	74	220574.....	70	11031201-B	29
211721-10	65	220327.....	74	295000.....	30, 48	11031201-BN	29
211722-3	65	220328.....	74	295001.....	30, 48	11031201-G.....	29
211722-10	65	220329.....	74	295002.....	30, 48	11031201-GN	29
211723-3	65	220330.....	75	295003.....	30, 48	11031201-R	29
211723-10	65	220331.....	75	295004.....	30, 48	11031201-RN	29
211724-3	65	220332.....	75	295005.....	30, 48	11031201-S.....	29
211724-10	65	220333.....	75	295006.....	30, 48	11031201-Y	29
211730-3	66	220334.....	75	295007.....	30, 48	11031201-YN.....	29
211730-10	66	220335.....	75	295008.....	30, 48	11031301-X	30
211731-3	66	220336.....	75	295020.....	48	17162076.....	57
211731-10	66	220337.....	74	295021.....	48	17162077.....	57
211732-3	66	220338.....	75	295022.....	48	17162078.....	57
211732-10	66	220339.....	75	295023.....	48	17162079.....	57

17162080.....	57	BAC5AF-W004	103	BAHDAF-W330.....	113	BSABDF-W004.....	114
17162081.....	57	BAC5AF-W012	103	BBFEZPPE-S0004	116	BSABDF-W012.....	114
17162082.....	57	BAC5AF-W025	103	BBFEZPPE-S0012	116	BSABDF-W025.....	114
17162083.....	57	BAC5AF-W040	103	BBFEZPPE-S0025	116	BSABDF-W040.....	114
20030000.....	43	BAC5AF-W080	103	BBFEZPPE-S0040	116	BSABDF-W080.....	114
20030004.....	43	BAC5AF-W120	103	BBFEZPPE-S0060	116	BSABDF-W120.....	114
20030004-SPME.....	43	BAC5AF-W220	103	BBFEZPPE-S0080	116	BSABDF-W220.....	114
20030100.....	43	BAC5AF-W330	103	BBFEZPPE-S0100	116	BSABDF-W330.....	114
20030104.....	43	BAC5IB-K1.....	104	BBFEZPPE-S0120	116	BSANDF-S0800.....	114
20030104-BIR.....	43	BAC5IB-K4.....	104	BBFEZPPE-S0220	116	BSANDF-S1600.....	114
20030104-SPME.....	43	BAC5ICO-1505	104	BBFEZPPE-S0330	116	BSANDF-S3000.....	114
20030300.....	43	BAC5ICO-1520	104	BDL000F-S0004	116	BSANDF-W004.....	114
20030304.....	43	BAC5ICO-2505	104	BDL000F-S0012	116	BSANDF-W012.....	114
20030304-SPME.....	43	BAC5ICO-2520	104	BDL000F-S0025	116	BSANDF-W025.....	114
20030500.....	43	BAC5JB-K1	104	BDL000F-S0040	116	BSANDF-W040.....	114
20030504.....	43	BAC5JB-K4	104	BDL000F-S0060	116	BSANDF-W080.....	114
20030504-BIR.....	43	BAC5JCO-1505	104	BDL000F-S0080	116	BSANDF-W120.....	114
20030504-SPME.....	43	BAC5JCO-1520	104	BDL000F-S0100	116	BSANDF-W220.....	114
20030700.....	43	BAC5JCO-1530	104	BDL000F-S0120	116	BSANDF-W330.....	114
20030704.....	43	BAC5JCO-1550	104	BDL000F-S0220	116	BSC1CF-S0800.....	101
20031504-SPME.....	43	BAC5JCO-2505	104	BDL000F-S0330	116	BSC1CF-S1600.....	101
25160346.....	56	BAC5JCO-2520	104	BDL000TO-001	117	BSC1CF-S3000.....	101
25160347.....	56	BAC5JCO-2530	104	BDL000TO-002	117	BSC1CF-W004.....	101
25160348.....	56	BAC5JCO-2550	104	BDL000TO-003	117	BSC1CF-W012.....	101
25160349.....	56	BAC5KB-K1	104	BDL000TO-004	117	BSC1CF-W025.....	101
25160350.....	56	BAC5KB-K4	104	BGB-VIALRACK.....	28, 51	BSC1CF-W040.....	101
25160351.....	56	BAC5KCO-1505	104	BOREZPFEP-S0004	117	BSC1CF-W080.....	101
26060425.....	9	BAC5KCO-1520	104	BOREZPFEP-S0012	117	BSC1CF-W120.....	101
26060427.....	9	BAC5KCO-1530	104	BOREZPFEP-S0025	117	BSC1CF-W220.....	101
29013417.....	19, 21	BAC5KCO-1550	104	BOREZPFEP-S0040	117	BSC1CF-W330.....	101
29013486.....	19, 20	BAC5KCO-2505	104	BOREZPFEP-S0060	117	BSCNAF-W004.....	111
29013487.....	19, 20	BAC5KCO-2520	104	BOREZPFEP-S0080	117	BSCNAF-W012.....	111
29013488.....	19, 20	BAC5KCO-2530	104	BOREZPFEP-S0100	117	BSCNAF-W025.....	111
29013489.....	20	BAC5KCO-2550	104	BOREZPFEP-S0120	117	BSCNAF-W040.....	111
29033406.....	19, 21	BAC5KF-S0800	103	BOREZPFEP-S0220	117	BSCNAF-W080.....	111
29033460.....	22	BAC5KF-S1600	103	BOREZPFEP-S0330	117	BSCNAF-W120.....	111
29033461.....	22	BAC5KF-S3000	103	BOREZPSI-S0004	117	BSCNAF-W220.....	111
29033471.....	22	BAC5KF-W004	103	BOREZPSI-S0012	117	BSCNAF-W330.....	111
30162086.....	56	BAC5KF-W012	103	BOREZPSI-S0025	117	BSE1AB-K1	102
30162087.....	56	BAC5KF-W025	103	BOREZPSI-S0040	117	BSE1AB-K4	102
30162088.....	56	BAC5KF-W040	103	BOREZPSI-S0060	117	BSE1ACO-1505	102
30162089.....	56	BAC5KF-W080	103	BOREZPSI-S0080	117	BSE1ACO-1520	102
30162090.....	56	BAC5KF-W120	103	BOREZPSI-S0100	117	BSE1ACO-1530	102
30162091.....	56	BAC5KF-W220	103	BOREZPSI-S0120	117	BSE1ACO-1550	102
30162092.....	56	BAC5KF-W330	103	BOREZPSI-S0220	117	BSE1ACO-2505	102
30162093.....	56	BAHAAF-W004.....	113	BOREZPSI-S0330	117	BSE1ACO-2520	102
30162094.....	56	BAHAAF-W012.....	113	BSAADF-S0800	114	BSE1ACO-2530	102
BAC5AB-K1	104	BAHAAF-W025	113	BSAADF-S1600	114	BSE1ACO-2550	102
BAC5AB-K4	104	BAHAAF-W040	113	BSAADF-S3000	114	BSE1AF-S0800	101
BAC5ACO-1505	104	BAHAAF-W080	113	BSAADF-W004	114	BSE1AF-S1600	101
BAC5ACO-1520	104	BAHAAF-W120	113	BSAADF-W012	114	BSE1AF-S3000	101
BAC5ACO-1530	104	BAHAAF-W220	113	BSAADF-W025	114	BSE1AF-W004	101
BAC5ACO-1550	104	BAHAAF-W330	113	BSAADF-W040	114	BSE1AF-W012	101
BAC5ACO-2505	104	BAHDAF-W004.....	113	BSAADF-W080	114	BSE1AF-W025	101
BAC5ACO-2520	104	BAHDAF-W012.....	113	BSAADF-W120	114	BSE1AF-W040	101
BAC5ACO-2530	104	BAHDAF-W025.....	113	BSAADF-W220	114	BSE1AF-W080	101
BAC5ACO-2550	104	BAHDAF-W040.....	113	BSAADF-W330	114	BSE1AF-W120	101
BAC5AF-S0800.....	103	BAHDAF-W080.....	113	BSABDF-S0800	114	BSE1AF-W220	101
BAC5AF-S1600.....	103	BAHDAF-W120.....	113	BSABDF-S1600	114	BSE1AF-W330	101
BAC5AF-S3000.....	103	BAHDAF-W220.....	113	BSABDF-S3000	114	BSE1IB-K1	102

Part Number Index

BSE1IB-K4.....	102	BSS2CF-W080.....	100	BTW0KF-W025.....	107	BTW6ACO-1505.....	106
BSE1ICO-1505.....	102	BSS2CF-W120.....	100	BTW0KF-W040.....	107	BTW6ACO-1520.....	106
BSE1ICO-1520.....	102	BSS2CF-W220.....	100	BTW0KF-W080.....	107	BTW6ACO-1530.....	106
BSE1ICO-2505.....	102	BSS2CF-W330.....	100	BTW0KF-W120.....	107	BTW6ACO-1550.....	106
BSE1ICO-2520.....	102	BTFEZPPE-S0004.....	116	BTW0KF-W220.....	107	BTW6ACO-2505.....	106
BSE1JB-K1.....	102	BTFEZPPE-S0012.....	116	BTW0KF-W330.....	107	BTW6ACO-2520.....	106
BSE1JB-K4.....	102	BTFEZPPE-S0025.....	116	BTW1AB-K1.....	110	BTW6ACO-2530.....	106
BSE1JCO-1505.....	102	BTFEZPPE-S0040.....	116	BTW1AB-K4.....	110	BTW6ACO-2550.....	106
BSE1JCO-1520.....	102	BTFEZPPE-S0060.....	116	BTW1ACO-1505.....	110	BTW6AF-W004.....	105
BSE1JCO-1530.....	102	BTFEZPPE-S0080.....	116	BTW1ACO-1520.....	110	BTW6AF-W012.....	105
BSE1JCO-1550.....	102	BTFEZPPE-S0100.....	116	BTW1ACO-1530.....	110	BTW6AF-W025.....	105
BSE1JCO-2505.....	102	BTFEZPPE-S0120.....	116	BTW1ACO-1550.....	110	BTW6AF-W040.....	105
BSE1JCO-2520.....	102	BTFEZPPE-S0220.....	116	BTW1ACO-2505.....	110	BTW6AF-W080.....	105
BSE1JCO-2530.....	102	BTFEZPPE-S0330.....	116	BTW1ACO-2520.....	110	BTW6AF-W120.....	105
BSE1JCO-2550.....	102	BTW0AB-K1.....	108	BTW1ACO-2530.....	110	BTW6AF-W220.....	105
BSE1KB-K1.....	102	BTW0AB-K4.....	108	BTW1ACO-2550.....	110	BTW6AF-W330.....	105
BSE1KB-K4.....	102	BTW0ACO-1505.....	108	BTW1AF-W004.....	109	BTW6IB-K1.....	106
BSE1KCO-1505.....	102	BTW0ACO-1520.....	108	BTW1AF-W012.....	109	BTW6IB-K4.....	106
BSE1KCO-1520.....	102	BTW0ACO-1530.....	108	BTW1AF-W025.....	109	BTW6ICO-1505.....	106
BSE1KCO-1530.....	102	BTW0ACO-1550.....	108	BTW1AF-W040.....	109	BTW6ICO-1520.....	106
BSE1KCO-1550.....	102	BTW0ACO-2505.....	108	BTW1AF-W080.....	109	BTW6ICO-2505.....	106
BSE1KCO-2505.....	102	BTW0ACO-2520.....	108	BTW1AF-W120.....	109	BTW6ICO-2520.....	106
BSE1KCO-2520.....	102	BTW0ACO-2530.....	108	BTW1AF-W220.....	109	BTW6JB-K1.....	106
BSE1KCO-2530.....	102	BTW0ACO-2550.....	108	BTW1AF-W330.....	109	BTW6JB-K4.....	106
BSE1KCO-2550.....	102	BTW0AF-W004.....	107	BTW1IB-K1.....	110	BTW6JCO-1505.....	106
BSLK.....	112	BTW0AF-W012.....	107	BTW1IB-K4.....	110	BTW6JCO-1520.....	106
BSNHAF-W004.....	112	BTW0AF-W025.....	107	BTW1ICO-1505.....	110	BTW6JCO-1530.....	106
BSNHAF-W012.....	112	BTW0AF-W040.....	107	BTW1ICO-1520.....	110	BTW6JCO-1550.....	106
BSNHAF-W025.....	112	BTW0AF-W080.....	107	BTW1ICO-2505.....	110	BTW6JCO-2505.....	106
BSNHAF-W040.....	112	BTW0AF-W120.....	107	BTW1ICO-2520.....	110	BTW6JCO-2520.....	106
BSNHAF-W080.....	112	BTW0AF-W220.....	107	BTW1JB-K1.....	110	BTW6JCO-2530.....	106
BSNHAF-W120.....	112	BTW0AF-W330.....	107	BTW1JB-K4.....	110	BTW6JCO-2550.....	106
BSNHAF-W220.....	112	BTW0IB-K1.....	108	BTW1JCO-1505.....	110	BTW6KB-K1.....	106
BSNHAF-W330.....	112	BTW0IB-K4.....	108	BTW1JCO-1520.....	110	BTW6KB-K4.....	106
BSOHAF-W004.....	111	BTW0ICO-1505.....	108	BTW1JCO-1530.....	110	BTW6KCO-1505.....	106
BSOHAF-W012.....	111	BTW0ICO-1520.....	108	BTW1JCO-1550.....	110	BTW6KCO-1520.....	106
BSOHAF-W025.....	111	BTW0ICO-2505.....	108	BTW1JCO-2505.....	110	BTW6KCO-1530.....	106
BSOHAF-W040.....	111	BTW0ICO-2520.....	108	BTW1JCO-2520.....	110	BTW6KCO-1550.....	106
BSOHAF-W080.....	111	BTW0JB-K1.....	108	BTW1JCO-2530.....	110	BTW6KCO-2505.....	106
BSOHAF-W120.....	111	BTW0JB-K4.....	108	BTW1JCO-2550.....	110	BTW6KCO-2520.....	106
BSOHAF-W220.....	111	BTW0JCO-1505.....	108	BTW1KB-K1.....	110	BTW6KCO-2530.....	106
BSOHAF-W330.....	111	BTW0JCO-1520.....	108	BTW1KB-K4.....	110	BTW6KCO-2550.....	106
BSS2AF-S0800.....	100	BTW0JCO-1530.....	108	BTW1KCO-1505.....	110	BTW6KF-W004.....	105
BSS2AF-S1600.....	100	BTW0JCO-1550.....	108	BTW1KCO-1520.....	110	BTW6KF-W012.....	105
BSS2AF-S3000.....	100	BTW0JCO-2505.....	108	BTW1KCO-1530.....	110	BTW6KF-W025.....	105
BSS2AF-W004.....	100	BTW0JCO-2520.....	108	BTW1KCO-1550.....	110	BTW6KF-W040.....	105
BSS2AF-W012.....	100	BTW0JCO-2530.....	108	BTW1KCO-2505.....	110	BTW6KF-W080.....	105
BSS2AF-W025.....	100	BTW0JCO-2550.....	108	BTW1KCO-2520.....	110	BTW6KF-W120.....	105
BSS2AF-W040.....	100	BTW0KB-K1.....	108	BTW1KCO-2530.....	110	BTW6KF-W220.....	105
BSS2AF-W080.....	100	BTW0KB-K4.....	108	BTW1KCO-2550.....	110	BTW6KF-W330.....	105
BSS2AF-W120.....	100	BTW0KCO-1505.....	108	BTW1KF-W004.....	109	CS.....	7, 8
BSS2AF-W220.....	100	BTW0KCO-1520.....	108	BTW1KF-W012.....	109	EPA20.....	44
BSS2AF-W330.....	100	BTW0KCO-1530.....	108	BTW1KF-W025.....	109	EPA20-B.....	44
BSS2CF-S0800.....	100	BTW0KCO-1550.....	108	BTW1KF-W040.....	109	EPA30.....	45
BSS2CF-S1600.....	100	BTW0KCO-2505.....	108	BTW1KF-W080.....	109	EPA30-B.....	45
BSS2CF-S3000.....	100	BTW0KCO-2520.....	108	BTW1KF-W120.....	109	EPA40.....	45
BSS2CF-W004.....	100	BTW0KCO-2530.....	108	BTW1KF-W220.....	109	EPA40-B.....	45
BSS2CF-W012.....	100	BTW0KCO-2550.....	108	BTW1KF-W330.....	109	EPA60.....	45
BSS2CF-W025.....	100	BTW0KF-W004.....	107	BTW6AB-K1.....	106	EPA60-B.....	45
BSS2CF-W040.....	100	BTW0KF-W012.....	107	BTW6AB-K4.....	106	FV01-1.....	53

FV01-2.....	53	GV1603.....	22	LS1202-5.....	14	LS3302-5.....	18
FV03-1.....	52	GV1603-HP.....	22	LS2000.....	19	LS3303.....	18
FV03-2.....	52	GV1604.....	22	LS2000-5.....	19	LS3303-5.....	18
FV04-1.....	53	GV1604-HP.....	22	LS2001.....	19	LS3304.....	18
FV04-2.....	53	GV1605.....	22	LS2001-5.....	19	LS3304-5.....	18
FV05-1.....	53	GV1605-HP.....	22	LS2002.....	19	LS3400.....	18
FV05-2.....	53	GV1608.....	22	LS2002-5.....	19	LS3400-5.....	18
FV07-1.....	52	GV1608-HP.....	22	LS2003.....	19	LS3401.....	18
FV07-2.....	52	GV1610.....	22	LS2003-5.....	19	LS3401-5.....	18
G1212.....	20	GV1616.....	22	LS2100.....	19	LS3402.....	18
G1400.....	20	GV1624.....	22	LS2100-5.....	19	LS3402-5.....	18
G1405.....	20	GV1625.....	22	LS2101.....	19	LS3403.....	18
G1408.....	20	GV1800.....	22	LS2101-5.....	19	LS3403-5.....	18
G1414.....	20	GV1804.....	22	LS2102.....	19	LS3404.....	18
G1416.....	20	GV1805.....	22	LS2102-5.....	19	LS3404-5.....	18
G1418.....	20	GV1808.....	22	LS2103.....	19	LS3405.....	18
G1440.....	20	GV1816.....	22	LS2103-5.....	19	LS3405-5.....	18
G1460.....	20	GV1818.....	22	LS2200.....	19	LS9000.....	15
G1600.....	20	GV1825.....	22	LS2200-5.....	19	LS9000-5.....	15
G1604.....	20	GV1828.....	22	LS2201.....	19	LS9001.....	15
G1604-HP.....	20	IMBUS.....	13, 69	LS2201-5.....	19	LS9001-5.....	15
G1605.....	20	LS1000.....	15	LS2202.....	19	LS9002.....	15
G1605-HP.....	20	LS1000-5.....	15	LS2202-5.....	19	LS9002-5.....	15
G1608.....	20	LS1001.....	15	LS3000.....	16	LS9003.....	15
G1608-HP.....	20	LS1001-5.....	15	LS3000-5.....	16	LS9003-5.....	15
G1610.....	20	LS1002.....	15	LS3001.....	16	LS9004.....	15
G1610-HP.....	20	LS1002-5.....	15	LS3001-5.....	16	LS9004-5.....	15
G1612.....	20	LS1003.....	15	LS3002.....	16	LS9005.....	19
G1616.....	20	LS1003-5.....	15	LS3002-5.....	16	LS9005-5.....	19
G1625.....	20	LS1004.....	15	LS3003.....	16	LS9006.....	16, 18
G1800.....	20	LS1004-5.....	15	LS3003-5.....	16	LS9006-5.....	16, 18
G1804.....	20	LS1005.....	15	LS3004.....	16	LS9007.....	16, 18
G1805.....	20	LS1005-5.....	15	LS3004-5.....	16	LS9007-5.....	16, 18
G1805-CE.....	20	LS1006.....	15	LS3005.....	16	MRV-1.....	47
G1808.....	20	LS1006-5.....	15	LS3005-5.....	16	MRV-3.....	47
G1808-CE.....	20	LS1007.....	15	LS3006.....	16	MRV-5.....	47
G1816.....	20	LS1007-5.....	15	LS3006-5.....	16	MRV-10.....	47
G1818.....	20	LS1100.....	14	LS3007.....	16	MRVA-10.....	47
G3434.....	20	LS1100-5.....	14	LS3007-5.....	16	MRV-CS1.....	47
G3838.....	20	LS1101.....	14	LS3100.....	17	MRV-CS2.....	47
GS635-HP.....	21	LS1101-5.....	14	LS3100-5.....	17	MS-FIT.....	11
GS652-HP.....	21	LS1102.....	14	LS3101.....	17	MS-FIT3.....	11
GSBV01.....	21	LS1102-5.....	14	LS3101-5.....	17	MS-FIT4-T.....	11
GSH04.....	20	LS1103.....	14	LS3102.....	17	MS-FIT4-X.....	11
GSH05.....	20	LS1103-5.....	14	LS3102-5.....	17	MV-13T.....	47
GSH08.....	20	LS1104.....	14	LS3103.....	17	MV-15T.....	47
GSH50.....	20	LS1104-5.....	14	LS3103-5.....	17	MV-18T.....	47
GSPE01.....	21	LS1105.....	14	LS3104.....	17	MV-20T.....	47
GSSH01.....	21	LS1105-5.....	14	LS3104-5.....	17	MV-24T.....	47
GSSH02.....	21	LS1106.....	14	LS3105.....	17	PPCV1103B.....	29, 32
GSSH03.....	21	LS1106-5.....	14	LS3105-5.....	17	PPCV1103K.....	29, 32
GV1212.....	22	LS1107.....	14	LS3200.....	16	PPCV1107K.....	29, 32
GV1400.....	22	LS1107-5.....	14	LS3200-5.....	16	PP-EWS-2L.....	57
GV1405.....	22	LS1108.....	14	LS3201.....	16	PP-EWS-2LL.....	57
GV1408.....	22	LS1108-5.....	14	LS3201-5.....	16	PP-EWS-5L.....	57
GV1414.....	22	LS1200.....	14	LS3300.....	18	PP-EWS-5LL.....	57
GV1416.....	22	LS1200-5.....	14	LS3300-5.....	18	PP-EWS-10L.....	57
GV1418.....	22	LS1201.....	14	LS3301.....	18	PP-EWS-10LL.....	57
GV1460.....	22	LS1201-5.....	14	LS3301-5.....	18	PP-EWS-20L.....	57
GV1600.....	22	LS1202.....	14	LS3302.....	18	PP-EWS-20LL.....	57

Part Number Index

PPSB12-B	51	SET-3010177	93	SET-3030242	93	SET-LMK.2616822	92
PPSB12-G	51	SET-3010179	93	SET-3030243	93	SET-LMK.2616922	92
PPSB12-O	51	SET-3010262	93	SET-3030244	93	SET-LMK.2620011	91
PPSB12-P	51	SET-3010263	93	SET-3030245	93	SET-LMK.2620054	91
PPSB12-T	51	SET-3010264	93	SET-3030246	93	SET-LMK.2620517	91
PPSB12-Y	51	SET-3010265	93	SET-3030247	93	SET-LMK.2620517-2P..	91
PPSB15-R	51	SET-3010266	93	SET-3030248	94	SET-LMK.2620517-6P..	91
PPSB24-B	51	SET-3010267	93	SET-3030249	94	SET-LMK.2620615	91
PPSB28A-V	46, 51	SET-3010268	93	SET-3030250	94	SET-LMK.2620615-2P..	91
PPSB28B-V	51	SET-3010269	93	SET-3030251	94	SET-LMK.2620615-6P..	91
PPSV0903K	37	SET-3010270	93	SET-3030252	94	SET-LMK.2620706	91
PPSV0907K	37	SET-3010299	93	SET-3030298	95	SET-LMK.2620706-2P..	91
QP-272626	46	SET-3010300	93	SET-3030299	95	SET-LMK.2620706-6P..	91
QP-272627	46	SET-3010317	93	SET-3030300	95	SET-LMK.2620719	91
QP-272628	46	SET-3010318	93	SET-3030301	95	SET-LMK.2620719-2P..	91
QP-272632	46	SET-3010319	93	SET-3030302	95	SET-LMK.2620719-6P..	91
QP-272633	46	SET-3030126	90	SET-3030303	95	SET-LMK.2620721	91
QP-272634	46	SET-3030127	90	SET-3030366	94	SET-LMK.2620721-2P..	91
QP-272635	46	SET-3030128	90	SET-3030368	94	SET-LMK.2620721-6P..	91
S202020D	12	SET-3030129	90	SET-3030389	95	SET-LMK.2620803	91
S252525D	12	SET-3030130	90	SET-3030544	94	SET-LMK.2620821	91
S323232D	12	SET-3030131	90	SET-3030604	94	SET-LMK.2620903	91
S535353D	12	SET-3030132	90	SET-3030605	94	SET-LMK.2620908	91
S20202020TD	12	SET-3030133	90	SET-3030606	94	SF2	44
S20202020XD	13	SET-3030134	90	SET-3030607	94	SF2-B	44
S25252525TD	12	SET-3030135	90	SET-3030672	94	SF4	44
S25252525XD	13	SET-3030136	90	SET-3030673	94	SF4-B	44
S32323232TD	12	SET-3030137	90	SET-3030674	94	SF8	44
S32323232XD	13	SET-3030138	90	SET-3030676	94	SF8-B	44
S53535353TD	12	SET-3030139	90	SET-3050022	94, 95	SF12	44
S53535353XD	13	SET-3030140	90	SET-3050036	94, 95	SF12-B	44
SA5	24	SET-3030141	90	SET-3050072	94, 95	SF16	44
SA9	24	SET-3030151	90	SET-3050179	94, 95	SF20	44
SA11	24	SET-3030152	90	SET-LMK.2106302	91	SF0402-1	55
SA11-100	24	SET-3030154	94	SET-LMK.2106303	91	SF0402-2	55
SA17	24	SET-3030155	94	SET-LMK.2106403	91	SF0403-1	54
SA95	24	SET-3030156	94	SET-LMK.2106416	91	SF0403-2	54
SA115	24	SET-3030163	90	SET-LMK.2106416-2P..	91	SF0404-1	54
SA127	24	SET-3030164	90	SET-LMK.2106416-6P..	91	SF0404-2	54
SAS	24	SET-3030165	90	SET-LMK.2106424	91	SF0405-1	55
SB5	24	SET-3030166	90	SET-LMK.2106426	91	SF0405-2	55
SB9	24	SET-3030167	90	SET-LMK.2116404	92	SF0407-1	55
SB10	24	SET-3030168	90	SET-LMK.2116405	92	SF0407-2	55
SB11	24	SET-3030169	90	SET-LMK.2116406	92	SF0409-1	54
SB11-100	24	SET-3030170	90	SET-LMK.2220001	91	SF0409-2	54
SB17	24	SET-3030171	90	SET-LMK.2220001-6P..	91	SF1300-07	55
SB64	24	SET-3030174	90	SET-LMK.2606403	91	SF1300-10	55
SB95	24	SET-3030175	90	SET-LMK.2606407	91	SF1301-1ME	55
SB115	24	SET-3030176	90	SET-LMK.2606416	91	SF1301-1MEG	55
SB127	24	SET-3030186	94	SET-LMK.2616003	92	SF1301-2ME	55
SBS	24	SET-3030187	94	SET-LMK.2616012	92	SF1301-2MEG	55
SET-3010083	92	SET-3030188	94	SET-LMK.2616404	92	SF1302-1	55
SET-3010084	92	SET-3030205	95	SET-LMK.2616405	92	SF1302-2	55
SET-3010085	92	SET-3030206	95	SET-LMK.2616422	92	SF1303-1	54
SET-3010086	92	SET-3030207	95	SET-LMK.2616502C	92	SF1303-1G	54
SET-3010087	92	SET-3030208	95	SET-LMK.2616702C	92	SF1303-2	54
SET-3010088	92	SET-3030209	95	SET-LMK.2616703	92	SF1303-2G	54
SET-3010089	92	SET-3030210	95	SET-LMK.2616704C	92	SF1303-3	54
SET-3010175	93	SET-3030211	95	SET-LMK.2616803	92	SF1303-4	54
SET-3010176	93	SET-3030241	93	SET-LMK.2616804	92	SF1304-1	54

SF1304-1G	54	SMS-50.....	24	SPFMICCA02	59	SP-NGRE16.....	88
SF1304-2	54	SP	24	SPFMICCA45	59	SP-NGRE18.....	88
SF1304-2G	54	SP-A2845PTFE	87	SPFMICNC02	59	SP-NOPBLK16	88
SF1304-3	54	SP-A3245PP	87	SPFMICNC45	59	SP-NOPBLK18	88
SF1304-4	54	SP-A3245PTFE	87	SPFMICNL02	59	SP-NOPVIO16	88
SF1305-1	55	SP-A3845PP	87	SPFMICNL45	59	SP-NOPVIO18	88
SF1305-1G	55	SP-A3845PTFE	87	SPFMICPP02	59	SP-NP14.....	88
SF1305-2	55	SP-A4032PP	87	SPFMICPP45	59	SP-NP18.....	88
SF1305-2G	55	SP-A4038PP	87	SPFMICPS02	59	SP-NPBAR	88
SF1306-1	55	SP-A4045PP	87	SPFMICPS45	59	SP-NPFIL.....	88
SF1306-1G	55	SP-A4045PTFE	87	SPFMICPT02	59	SP-NRED16	88
SF1306-2	55	SP-A4532PP	87	SPFMICPT45	59	SP-NRED18	88
SF1306-2G	55	SP-A4538PP	87	SPFMICPV02	59	SP-NVIO16	88
SF1307-1	55	SP-A4545X4	87	SPFMICPV45	59	SP-NVIO18	88
SF1307-1G	55	SP-A4555PP	87	SPFMICRC02.....	59	SP-NWHI316.....	88
SF1307-2	55	SP-A5560PP	87	SPFMICRC45.....	59	SP-S45F1	77
SF1307-2G	55	SP-A5590PP	87	SPFMIDCA02	58	SP-S45F1-G.....	77
SF1309-1	54	SP-A6090PP	87	SPFMIDCA45	58	SP-S45F1-L.....	77
SF1309-2	54	SP-A454545	87	SPFMIDNC02	58	SP-S45F1P141	78
SF2500-07	55	SP-AC1512	86	SPFMIDNC45	58	SP-S45F1-R	77
SF2500-10	55	SP-AC1612	86	SPFMIDNL02	58	SP-S45F1-V	77
SF2501-1ME	55	SP-AC1675	86	SPFMIDNL45	58	SP-S45F1-Y	77
SF2501-1MEG	55	SP-AC4280	86	SPFMIDPP02	58	SP-S45F2	77
SF2501-2ME	55	SP-AC6565	86	SPFMIDPP45	58	SP-S45F2-G.....	77
SF2501-2MEG	55	SP-AC7012	86	SPFMIDPS02	58	SP-S45F2-L.....	77
SF2502-1	55	SP-AF90E	85	SPFMIDPS45	58	SP-S45F2-R	77
SF2502-2	55	SP-AFSE	85	SPFMIDPT02	58	SP-S45F2-V	77
SF2503-1	54	SP-AGN45	78	SPFMIDPT45	58	SP-S45F2-Y	77
SF2503-1G	54	SP-AY3PP	86	SPFMIDPV02	58	SP-S45F3	77
SF2503-2	54	SP-AY5PP	86	SPFMIDPV45	58	SP-S45F3-G.....	77
SF2503-2G	54	SP-AY7PP	86	SPFMIDRC02.....	58	SP-S45F3-L.....	77
SF2503-3	54	SP-AY9PP	86	SPFMIDRC45.....	58	SP-S45F3-R	77
SF2503-4	54	SP-AY11PP	86	SPFNANCA02	59	SP-S45F3-V	77
SF2504-1	54	SP-BFA34PP	86	SPFNANCA45	59	SP-S45F3-Y	77
SF2504-1G	54	SP-BFA56PP	86	SPFNANNC02	59	SP-S45F4	77
SF2504-2	54	SP-BFA69PP	86	SPFNANNC45	59	SP-S45F4-G.....	77
SF2504-2G	54	SP-BFA911PP	86	SPFNANNL02	59	SP-S45F4-L.....	77
SF2504-3	54	SP-BFS34PP	86	SPFNANNL45	59	SP-S45F4-R	77
SF2504-4	54	SP-BFS56PP	86	SPFNANPP02.....	59	SP-S45F4-V	77
SF2505-1	55	SP-BFS69PP	86	SPFNANPP45.....	59	SP-S45F4-Y	77
SF2505-1G	55	SP-BFS911PP	86	SPFNANPS02.....	59	SP-S45F5	77
SF2505-2	55	SP-C50PE5	80	SPFNANPS45.....	59	SP-S45F5-G.....	77
SF2505-2G	55	SP-FAL	85	SPFNANPT02.....	59	SP-S45F5-R	77
SF2506-1	55	SP-FAM	85	SPFNANPT45.....	59	SP-S45F5-V	77
SF2506-1G	55	SPFMAXCA02.....	58	SPFNANPV02	59	SP-S45F5-Y	77
SF2506-2	55	SPFMAXCA45.....	58	SPFNANPV45	59	SP-S45F6	77
SF2506-2G	55	SPFMAXNC02.....	58	SPFNANRC02.....	59	SP-S45F6-G.....	77
SF2507-1	55	SPFMAXNC45.....	58	SPFNANRC45.....	59	SP-S45F6-R	77
SF2507-1G	55	SPFMAXNL02.....	58	SP-FSL.....	79, 83, 85	SP-S45F6-V	77
SF2507-2	55	SPFMAXNL45.....	58	SP-FSM	79, 83, 85	SP-S45F6-Y	77
SF2507-2G	55	SPFMAXPP02	58	SP-FSS.....	79, 83, 85	SP-S45P141	78
SF2509-1	54	SPFMAXPP45	58	SP-FSXL.....	85	SP-S45P3161	78
SF2509-2	54	SPFMAXPS02	58	SP-FSXXL	85	SP-S45P3162	78
SM5-50	24	SPFMAXPS45	58	SP-NBLK16.....	88	SP-S45P3163	78
SM9-50	24	SPFMAXPT02	58	SP-NBLK18.....	88	SP-S55F1P141	78
SM11-50	24	SPFMAXPT45	58	SP-NBLU16	88	SP-S55P316	78
SM11-100	24	SPFMAXPV02	58	SP-NBLU18	88	SP-S55P316P141	78
SM17-50	24	SPFMAXPV45	58	SP-NF16.....	88	SP-S60F1P141	78
SM115-50	24	SPFMAXRC02	58	SP-NF18.....	88	SP-S60P141	78
SM127-50	24	SPFMAXRC45	58	SP-NF316.....	88	SP-S60P316	78

Part Number Index

SP-S60P316P141	78	SP-W60F2	82	SS10	24	SW-B-200-R-2	67
SP-SAIV	77	SP-W60F2B1	82	SS11	24	SW-B-202-1	67
SP-SAIV-A	77	SP-W60F2B2	82	SS17	24	SW-B-203-1	67
SP-SAIV-P	77	SP-W60F2B3	82	SS95	24	SW-B-204-1	67
SP-SGNF1	78	SP-W60F3	82	SS125	24	SW-B-400-1-2	67
SP-SGNF2	78	SP-W60F3B1	82	SSS	24	SW-B-400-1-4	67
SP-SGNF3	78	SP-W60F3B2	82	SUNI3AD	12	SW-B-400-3	67
SP-SGNF4	78	SP-W60F3B3	82	SUNI3BD	12	SW-B-400-6	67
SP-W45B1	79	SP-W60F4	82	SUNI4TAD	12	SW-B-400-6-1	67
SP-W45B2	79	SP-W60F5	82	SUNI4TBD	12	SW-B-400-6-2	67
SP-W45F1	79	SP-W60F5B3	82	SUNI4XAD	13	SW-B-400-6BT	67
SP-W45F1B1	79	SP-W83F1B1	83	SUNI4XBD	13	SW-B-400-7-2	67
SP-W45F1B2	79	SP-W83F2B1	83	SV1ML	44	SW-B-400-7-4	67
SP-W45F2	79	SP-W83F3B1	83	SV1MLB	44	SW-B-400-C	67
SP-W45F2B1	79	SP-W90B1	84	SV2ML	44	SW-B-400-P	67
SP-W45F2B2	79	SP-W90B2	84	SV2MLB	44	SW-B-400-R-2	67
SP-W45F3	79	SP-W90B3	84	SV4ML	44	SW-B-402-1	67
SP-W45F3B1	79	SP-W90B4	84	SV4MLB	44	SW-B-403-1	67
SP-W45F4	79	SP-W90B5	84	SV-8-425	45	SW-B-404-1	67
SP-W45F4B1	79	SP-W90F1	84	SV-13-425	45	SW-B-OGS2	69
SP-W50F1	80	SP-W90F2	84	SV-13-425-P	45	SW-B-OGS2-A	69
SP-W50F1B1	80	SP-W90F2B1	84	SV-15-425	45	SW-SS-1GS4	69
SP-W50F1B2	80	SP-W90F2B2	84	SV-15-425-P	45	SW-SS-1GS4-A	69
SP-W50F1B3	80	SP-W90F2B3	84	SV-18-400	45	SW-SS-41GS2	69
SP-W50F2	80	SP-W90F2B4	84	SV-18-400-P	45	SW-SS-41GS2-A	69
SP-W50F2B1	80	SP-W90F3	84	SV-20-400	45	SW-SS-43GS4	69
SP-W50F2B1-I	80	SP-W90F3B1	84	SV-20-400-P	45	SW-SS-43GS4-A	69
SP-W50F2B2	80	SP-W90F3B2	84	SV-24-400	45	SW-SS-100-1-1	68
SP-W50F2B3	80	SP-W90F3B3	84	SV-24-400-P	45	SW-SS-100-1-2	68
SP-W50F3	80	SP-W90F3B4	84	SV-EPA	45	SW-SS-100-3	68
SP-W50F3B1	80	SP-W90F4	84	SV-EPA-CAP	45	SW-SS-100-6	68
SP-W50F3B2	80	SP-W90F5	84	SV-EPA-SEPTA	45	SW-SS-100-6BT	68
SP-W50F3B3	80	SP-W90F6	84	SW-B-1GS4	69	SW-SS-100-C	68
SP-W50F4	80	SP-W90F6B2	84	SW-B-1GS4-A	69	SW-SS-100-P	68
SP-W50F5	80	SRC300-B	34	SW-B-41S2	69	SW-SS-100-R-2	68
SP-W53F1B1	83	SRC300-BN	33	SW-B-41S2-A	69	SW-SS-102-1	68
SP-W53F2B1	83	SRC300-GN	33	SW-B-43S4	69	SW-SS-103-1	68
SP-W53F3	83	SRC300-PN	33	SW-B-43S4-A	69	SW-SS-104-1	68
SP-W53F3B1	83	SRC300-RN	33	SW-B-100-1-1	67	SW-SS-200-1-1	68
SP-W55B3	81	SRC300-T	34	SW-B-100-1-2	67	SW-SS-200-1-2	68
SP-W55F1	81	SRC300-TN	33	SW-B-100-3	67	SW-SS-200-1-4	68
SP-W55F1B1	81	SRC300-YN	33	SW-B-100-6	67	SW-SS-200-3	68
SP-W55F1B2	81	SRC301-B	33	SW-B-100-6BT	67	SW-SS-200-6	68
SP-W55F1B2-I	81	SRC301-G	33	SW-B-100-C	67	SW-SS-200-6-1	68
SP-W55F1B3	81	SRC301-P	33	SW-B-100-P	67	SW-SS-200-6BT	68
SP-W55F1B3-I	81	SRC301-R	33	SW-B-100-R-2	67	SW-SS-200-7-2	68
SP-W55F2	81	SRC301-T	33	SW-B-102-1	67	SW-SS-200-7-4	68
SP-W55F2B1	81	SRC301-Y	33	SW-B-103-1	67	SW-SS-200-C	68
SP-W55F2B2	81	SRC302-B	33	SW-B-104-1	67	SW-SS-200-P	68
SP-W55F2B3	81	SRC302-G	33	SW-B-200-1-1	67	SW-SS-200-R-2	68
SP-W55F3	81	SRC302-P	33	SW-B-200-1-2	67	SW-SS-202-1	68
SP-W55F3B1	81	SRC302-R	33	SW-B-200-1-4	67	SW-SS-203-1	68
SP-W55F3B2	81	SRC302-T	33	SW-B-200-3	67	SW-SS-204-1	68
SP-W55F3B3	81	SRC302-Y	33	SW-B-200-6	67	SW-SS-400-1-2	68
SP-W55F4	81	SRC313-B	33	SW-B-200-6-1	67	SW-SS-400-1-4	68
SP-W60B4	82	SRC313-G	33	SW-B-200-6BT	67	SW-SS-400-3	68
SP-W60F1	82	SRC313-P	33	SW-B-200-7-2	67	SW-SS-400-6	68
SP-W60F1B1	82	SRC313-R	33	SW-B-200-7-4	67	SW-SS-400-6-1	68
SP-W60F1B2	82	SRC313-T	33	SW-B-200-C	67	SW-SS-400-6-2	68
SP-W60F1B3	82	SRC313-Y	33	SW-B-200-P	67	SW-SS-400-6BT	68

SW-SS-400-7-2	68	TSP-050150	6	TSP-530700-D-10	8
SW-SS-400-7-4	68	TSP-050192	6	TSP-530700-M-10	9
SW-SS-400-C	68	TSP-050375	6	TSP-530700-P-10	8
SW-SS-400-P	68	TSP-050375-D-10	8	TSP-700850	6
SW-SS-400-R-2	68	TSP-050375-M-10	9	TSU-050375	7
SW-SS-402-1	68	TSP-050375-P-10	8	TSU-075375	7
SW-SS-403-1	68	TSP-050794	7	TSU-100375	7
SW-SS-404-1	68	TSP-075150	6	UNIAD	11
SW-SS-OGS2	69	TSP-075200	6	UNIBD	11
SW-SS-OGS2-A	69	TSP-075375	6	V1400	23
T1400	23	TSP-075375-D-10	8	V1414	23
T1414	23	TSP-075375-M-10	9	V1416	23
T1416	23	TSP-075375-P-10	8	V1418	23
T1418	23	TSP-075794	7	V1600	23
T1600	23	TSP-100170	6	V1603	23
T1603	23	TSP-100170-D-10	8	V1604	23
T1604	23	TSP-100170-M-10	9	V1604-HP	23
T1605	23	TSP-100200	6	V1605	23
T1608	23	TSP-100200-D-10	8	V1605-HP	23
T1610	23	TSP-100200-M-10	9	V1608	23
T1612	23	TSP-100245	6	V1608-HP	23
T1616	23	TSP-100245-D-10	8	V1610	23
T1800	23	TSP-100245-M-10	9	V1612	23
T1804	23	TSP-100375	6	V1616	23
T1805	23	TSP-100375-D-10	8	V1624	23
T1808	23	TSP-100375-M-10	9	V1625	23
T1816	23	TSP-100375-P-10	8	V1800	23
T1818	23	TSP-100794	7	V1804	23
T1825	23	TSP-150375	6	V1805	23
T14316	23	TSP-150375-D-10	8	V1808	23
T316316	23	TSP-150375-M-10	9	V1816	23
TPXCV1102	32	TSP-150665	7	V1818	23
TPXCV1103K	29, 32	TSP-180350	6	V1825	23
TPXSV0903K	37	TSP-180350-D-10	8	V1828	23
TSH-050375	7	TSP-180350-M-10	9	VR15	40, 51
TSH-075375	7	TSP-200350	6	WFPCA02	60
TSH-100375	7	TSP-200350-D-10	8	WFPCA45	60
TSP000.2375NC	6	TSP-200350-M-10	9	WFPNC02	60
TSP000.6375NC	6	TSP-200665	7	WFPNC45	60
TSP001.0375NC	6	TSP-200794	7	WFPNL02	60
TSP-002150	6	TSP-250350	6	WFPNL45	60
TSP-005150	6	TSP-250350-D-10	8	WFPP02	60
TSP-005375	6	TSP-250350-M-10	9	WFPP45	60
TSP-010150	6	TSP-250350-P-10	8	WFPPS02	60
TSP-010375	6	TSP-250665	7	WFPPS45	60
TSP-015150	6	TSP-250794	7	WFPT02	60
TSP-015375	6	TSP-300665	7	WFPT45	60
TSP-020090	6	TSP-300794	7	WFPPV02	60
TSP-020150	6	TSP-320450	6	WFPPV45	60
TSP-020375	6	TSP-320450-D-10	8	WFPRC02	60
TSP-025150	6	TSP-320450-M-10	9	WFPRC45	60
TSP-025375	6	TSP-320450-P-10	8	WWP-050375	7
TSP-025375-D-10	8	TSP-400794	7	WWP-075375	7
TSP-025375-M-10	9	TSP-450670	7	WWP-100375	7
TSP-025375-P-10	8	TSP-500794	7		
TSP-030150	6	TSP-530660	6		
TSP-030375	6	TSP-530660-D-10	8		
TSP-040105	6	TSP-530660-M-10	9		
TSP-040150	6	TSP-530660-P-10	8		
TSP-040375	6	TSP-530700	6		

Take advantage of our profound expertise in chromatography

Online Shop



www.bgb-shop.com

Find us on Facebook, LinkedIn and Instagram



www.facebook.com/bgbanalytik



www.linkedin.com/company/bgbanalytik



www.instagram.com/bgb_analytik

Also available at BGB Analytik

GC Columns



More than 10.000 GC columns available in our web shop from different well known suppliers. Please ask our experts for professional support.

For more information visit www.bgb-shop.com/gc-columns.

HPLC Columns



More than 40.000 HPLC columns available in our web shop from different well known suppliers. Please ask our experts for professional support.

For more information visit www.bgb-shop.com/hplc-columns.



Prices may change without notice and do not include VAT.

DR-BGB-2211

BGB GC|LC
MS|CE

www.bgb-shop.com

Germany: BGB Analytik Vertrieb GmbH • Mühlestraße 1 • 79539 Lörrach • Phone +49 7621 5884270 • Fax +49 7621 5884289 • sales.de@bgb-analytik.com
Benelux: BGB Analytik Benelux B.V. • Drielandendreef 42-44 • 3845 CA Harderwijk • Phone +31 341 700270 • Fax +31 341 700271 • sales.benelux@bgb-analytik.com
France: BGB Analytik France S.A.S. • 81 Vie de l'Etraz • 01630 St. Jean de Gonville • Phone +33 450 488567 • Fax +33 450 562378 • sales.fr@bgb-analytik.com
Switzerland: BGB Analytik AG • Rohrmattstrasse 4 • 4461 Böckten • Phone +41 61 991 00 46 • Fax +41 61 991 00 25 • sales@bgb-analytik.com
Turkey: BGB Analytik Laboratuvar Malzemeleri Ticaret LTD.ŞTİ • Starport Residence • Yenişehir Mah. Osmanlı Bulvarı. • Sümbül Sok. No:10, Daire: 193 • 34912 Kurtköy, Pendik, İstanbul • Phone +90 2169092048 • sales.tr@bgb-analytik.com
USA: BGB Analytik USA LLC • 8407 F Richmond Hwy • Alexandria, VA 22309 • Phone 1-703-780-1500 • Fax 1-703-991-9131 • sales.usa@bgb-analytik.com