




Dozaj Pompası
API 675

Teknik Özellikler

Q	: 8,7 m ³ /h
T	: 121°C (maks.)
P	: 250 Bar (maks.)
Viskozite	: 1.000 cPs (maks.)

**VIKING
PUMP**

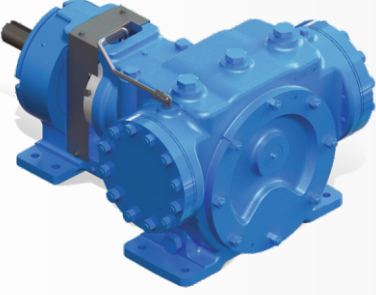

İç Dişli Pompalar
API 676

Teknik Özellikler

Q	: 363 m ³ /h
T	: -30°C / +350°C
P	: 14 Bar (maks.)
Viskozite	: 440.000 cP (maks.)



Doğanlar Mah. 1406 Sok. Dedeler İş Merkezi
No:11/1A 35050 Bornova / İzmir / TÜRKİYE



www.seterm.com




info@seterm.com



+90 (232) 459 36 30




Bize Ulaşın

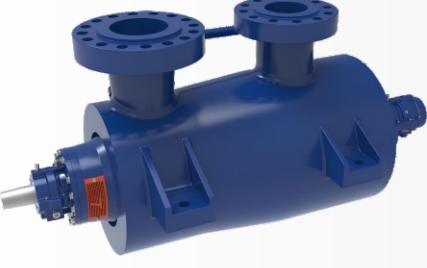

GABBIONETA PUMPS®
TERMOMECCANICA POMPE
BB5 TİP - API 610

Teknik Özellikler

C	: 3.000 m ³ /h (maks.)
H	: 7.000 m
T	: 427°C (maks.)
Hız	: 6.500 rpm

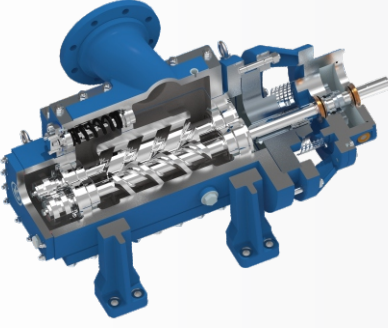

Çift Vidalı Pompalar
API 676

Teknik Özellikler


Q	: 5.000 m ³ /h (maks.)
H	: 100 Bar (maks.)
T	: 350°C
P	: PN400'e kadar
Viskozite	: 100.000 cSt (maks.)



Manyetik Kavramalı
Santrifüj Pompalar
API 685

Teknik Özellikler

Q	: 3.500 m ³ /h (maks.)
H	: 220 m (maks.)
T	: -120°C / +450°C
P	: PN40 / PN400

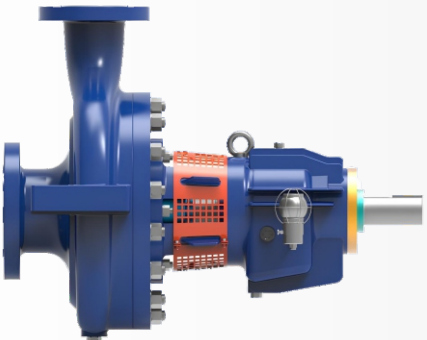

GABBIONETA PUMPS®
TERMOMECCANICA POMPE
OH2 TİP - API 610

Teknik Özellikler

Q	: 4.000 m ³ /h (maks.)
T	: 427°C
H	: 400 m (maks.)
Hız	: 4.000 rpm